



Leading Through Innovation



INSERTS & HOLDERS

SPADE DRILLS

BOHRMESSER

- For General Machines and Drilling Large Diameters, Longer Tool Life and High Productivity
- Für allgemeine Maschinen und zum Bohren großer Durchmesser, längere Werkzeugstandzeiten und höhere Produktivität

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -PRO
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC- SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

SELECTION GUIDE



Please visit
globalyg1.com/mat
for material search

INSERTS & HOLDERS
SPADE DRILLS

For General Machines and Drilling Large Diameters
Longer Tool Life and High Productivity

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A375

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc	SURFACE TREATMENT		
P	1	Non-alloy steel	About 0.15% C	Annealed	125		○	◎	◎
	2		About 0.45% C	Annealed	190	13	○	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	○	◎	◎
	4		About 0.75% C	Annealed	270	28	○	◎	◎
	5		About 0.75% C	Quenched & Tempered	300	32			
	6	Low alloy steel		Annealed	180	10	○	◎	◎
	7			Quenched & Tempered	275	29	○	◎	◎
	8			Quenched & Tempered	300	32		○	◎
	9			Quenched & Tempered	350	38		○	◎
	10	High alloyed steel, and tool steel		Annealed	200	15		○	◎
	11			Quenched & Tempered	325	35		○	◎
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15		○	○
	13		Martensitic	Quenched & Tempered	240	23		○	○
	14		Austenitic		180	10		○	○
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	○	○
	16		Pearlitic (Martensitic)		260	26	○	◎	◎
	17	Nodular cast iron	Ferritic		160	3	◎	○	○
	18		Pearlitic		250	25	○	◎	◎
	19	Malleable cast iron	Ferritic		130		◎	○	○
	20		Pearlitic		230	21	○	◎	◎
N	21	Aluminum-wrought alloy	Not Curable		60		◎	○	○
	22		Curable	Hardened	100		◎	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75				
	24		≤ 12% Si, Curable	Hardened	90				
	25		> 12% Si, Not Curable		130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90		◎	○	○
	28		CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15		◎	◎
	32			Cured	280	30		○	◎
	33		Ni or Co Based	Annealed	250	25		○	◎
	34			Cured	350	38		○	◎
	35			Cast	320	34		○	◎
	36	Titanium Alloys	Pure Titanium		400 Rm				
	37		Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel		Hardened	550	55		○	◎
	39			Hardened	630	60			
	40	Chilled Cast Iron	Cast		400	42			
	41	Hardened Cast Iron	Hardened		550	55			

TAPER SHANK		TAPER SHANK HOLDERS - INCH/METRIC	A352
FLANGED SHANK		FLANGED STRAIGHT SHANK HOLDERS - INCH/METRIC	A362
STRAIGHT SHANK		STRAIGHT SHANK HOLDERS - INCH	A369

Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	1~3	Y,Z,0,1~3	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	Y,Z,0,1,2
CARBIDE K10	CARBIDE K20	CARBIDE P40	HSS M4	SUPER HSS T15	PREMIUM HSS M48	CARBIDE K10	CARBIDE K20	CARBIDE P40	SUPER COBALT T15
STANDARD	STANDARD	STANDARD	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	FALT BOTTOM
Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)
A316	A319	A323	A328	A331	A335	A338	A341	A345	A349
TiN / TiCN / TiAIN									TiN / Hardslick / TiAIN



	○	◎	○	◎	◎		○	◎	◎	1
	○	◎	○	◎	◎		○	◎	◎	2
	○	◎	○	◎	◎		○	◎	◎	3
	○	◎	○	◎	◎		○	◎	◎	4
										5
	○	◎	○	◎	◎		○	◎	◎	6 P
	○	◎	○	◎	◎		○	◎	◎	7
	○	◎		○	◎		○	◎	○	8
	○	◎		○	◎		○	◎	○	9
	○	◎		○	◎		○	◎	○	10
	○	◎		○	◎		○	◎	○	11
	◎	○		○	○		◎	○	○	12
	◎	○		○	○		◎	○	○	13 M
	◎	○		○	○		◎	○	○	14
◎	○	○	◎	○	○	◎	○	○	○	15
◎	○	○	○	◎	◎	◎	○	○	◎	16
◎	○	○	◎	○	○	◎	○	○	◎	17 K
◎	○	○	◎	○	○	◎	○	○	◎	18
◎	○	○	◎	○	○	◎	○	○	◎	19
◎	○	○	○	◎	◎	◎	○	○	◎	20
	◎	○	◎	○	○		◎	○	○	21
	◎	○	◎	○	○		◎	○	○	22
										23
										24
										25
										26 N
	◎	○	◎	○	○		◎	○	○	27
										28
										29
										30
	◎	○		◎	◎		◎	○	◎	31
	◎	○		○	◎		◎	○	○	32
	◎	○		○	◎		◎	○	○	33
	◎	○		○	◎		◎	○	○	34 S
	◎	○		○	◎		◎	○	○	35
										36
										37
	○	◎		○	◎		○	◎	○	38
										39
										40 H
										41

Coating	Characteristics	Coating	Characteristics
H	-First choice for excellent wear resistance and toughness -Preventive of chipping due to cold welding -Achieve high penetration rates even in deep holes with reliable tool life -Coefficient of friction against steel : 0.25 -Color : Bronze	TiCN	-Maximum working temperature up to 400°C -Better wear resistance over non-coating -Coefficient of friction against steel : 0.4 -Color : Blue-Grey
		TiAIN	-Maximum working temperature up to 800°C -Excellent heat and oxidation resistance -Coefficient of friction against steel : 0.4 -Color : Violet-Grey
TiN	-Increased tool life over non-coating -Improved wear resistance and high hardness -For normal applications -Coefficient of friction against steel : 0.4 -Color : Gold	Hardslick	-Better chip evauation for tapping and drilling -High hardness and improved lubrication -Coefficient of friction against steel : 0.2 -Color : Black-Gery


CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -PRO
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC- SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

YGG SPADE DRILLS

SERIES 1, 2

SPADE DRILL INSERTS - HSS M4

🇪🇺 EINWEG BOHREINSATZ - HSS M4
🇫🇷 Plaquettes SPADE DRILL - HSS M4
🇮🇹 CUSPIDI SPADE DRILL - HSS M4

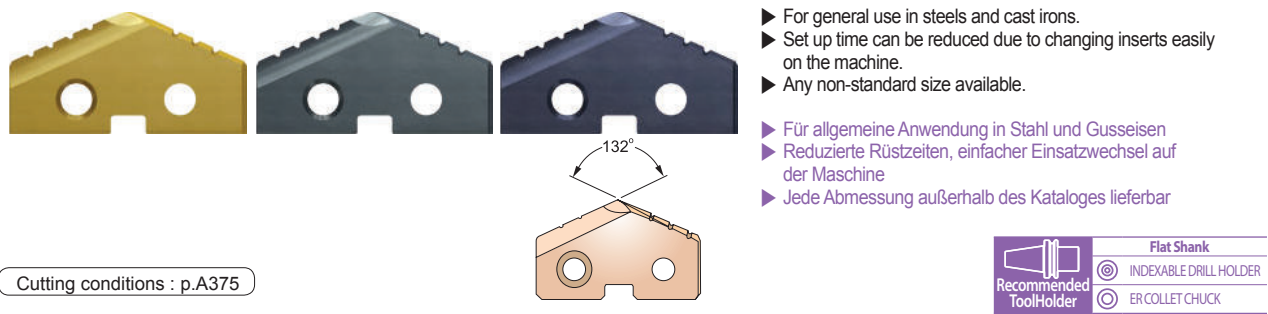

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	S1405045	S1410045	S1415045
		18.00	.7087		S1455180	S1460180	S1465180
	23/32	18.26	.7188		S1405046	S1410046	S1415046
		18.50	.7283		S1455185	S1460185	S1465185
	47/64	18.65	.7344		S1405047	S1410047	S1415047
		19.00	.7480		S1455190	S1460190	S1465190
	3/4	19.05	.7500		S1405048	S1410048	S1415048
	49/64	19.45	.7656		S1405049	S1410049	S1415049
		19.50	.7677		S1455195	S1460195	S1465195
	25/32	19.84	.7813		S1405050	S1410050	S1415050
		20.00	.7874		S1455200	S1460200	S1465200
	51/64	20.24	.7969		S1405051	S1410051	S1415051
		20.50	.8071		S1455205	S1460205	S1465205
	13/16	20.64	.8125		S1405052	S1410052	S1415052
		21.00	.8268		S1455210	S1460210	S1465210
	27/32	21.43	.8438		S1405054	S1410054	S1415054
	55/64	21.83	.8594		S1405055	S1410055	S1415055
		22.00	.8661		S1455220	S1460220	S1465220
	7/8	22.23	.8750		S1405056	S1410056	S1415056
	57/64	22.62	.8906		S1405057	S1410057	S1415057
	23.00	.9055	S1455230	S1460230	S1465230		
	29/32	23.02	.9063	S1405058	S1410058	S1415058	
	59/64	23.42	.9219	S1405059	S1410059	S1415059	
	15/16	23.81	.9375	S1405060	S1410060	S1415060	
		24.00	.9449	S1455240	S1460240	S1465240	
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1405062	S1410062	S1415062
	63/64	25.00	.9843		S1455250	S1460250	S1465250
	1	25.40	1.0000		S1405100	S1410100	S1415100
	1-1/64	25.80	1.0156		S1405101	S1410101	S1415101
		26.00	1.0236		S1455260	S1460260	S1465260
	1-1/32	26.19	1.0313		S1405102	S1410102	S1415102
	1-3/64	26.59	1.0469		S1405103	S1410103	S1415103
	1-1/16	26.99	1.0625		S1405104	S1410104	S1415104
			27.00		1.0630	S1455270	S1460270


ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○		○	○			◎	○	◎	○	◎	◎	○	◎	○	◎	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎														

YGG SPADE DRILLS

SERIES 2, 3

SPADE DRILL INSERTS - HSS M4

🇪🇺 EINWEG BOHREINSATZ - HSS M4
🇫🇷 Plaquettes FORETS A LAME - HSS M4
🇮🇹 CUSPIDI SPADE DRILL - HSS M4

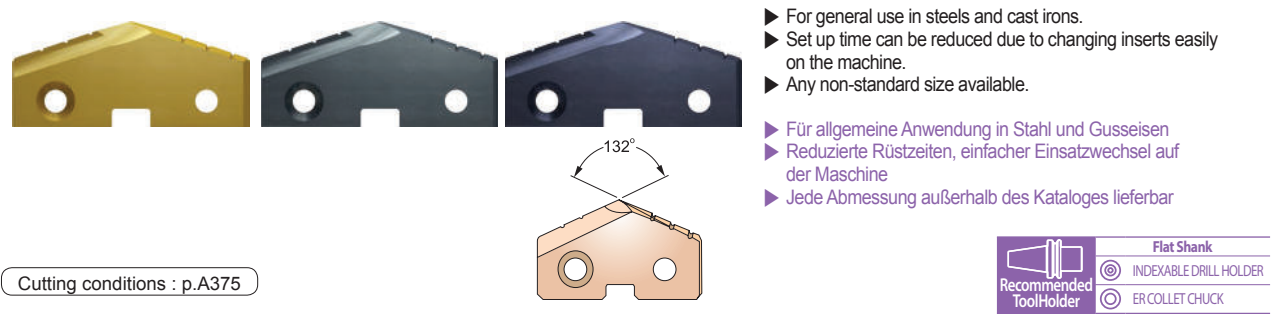

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	1-3/32	27.78	1.0938	4.8 (3/16)	S1405106	S1410106	S1415106
		28.00	1.1024		S1455280	S1460280	S1465280
	1-7/64	28.18	1.1094		S1405107	S1410107	S1415107
	1-1/8	28.58	1.1250		S1405108	S1410108	S1415108
		29.00	1.1417		S1455290	S1460290	S1465290
	1-5/32	29.37	1.1563		S1405110	S1410110	S1415110
		30.00	1.1811		S1455300	S1460300	S1465300
	1-3/16	30.16	1.1875		S1405112	S1410112	S1415112
	1-7/32	30.96	1.2188		S1405114	S1410114	S1415114
		31.00	1.2205		S1455310	S1460310	S1465310
	1-1/4	31.75	1.2500		S1405116	S1410116	S1415116
		32.00	1.2598		S1455320	S1460320	S1465320
	1-9/32	32.54	1.2813		S1405118	S1410118	S1415118
		33.00	1.2992		S1455330	S1460330	S1465330
	1-5/16	33.34	1.3125		S1405120	S1410120	S1415120
		34.00	1.3386		S1455340	S1460340	S1465340
	1-11/32	34.13	1.3438		S1405122	S1410122	S1415122
	1-3/8	34.93	1.3750		S1405124	S1410124	S1415124
	35.00	1.3780	S1455350	S1460350	S1465350		
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4063	6.4 (1/4)	S1405126	S1410126	S1415126
		36.00	1.4173		S1455360	S1460360	S1465360
	1-7/16	36.51	1.4375		S1405128	S1410128	S1415128
		37.00	1.4567		S1455370	S1460370	S1465370
	1-15/32	37.31	1.4688		S1405130	S1410130	S1415130
		38.00	1.4961		S1455380	S1460380	S1465380
	1-1/2	38.10	1.5000		S1405132	S1410132	S1415132
	1-17/32	38.89	1.5313		S1405134	S1410134	S1415134
		39.00	1.5354		S1455390	S1460390	S1465390
	1-9/16	39.69	1.5625		S1405136	S1410136	S1415136
		40.00	1.5748		S1455400	S1460400	S1465400
	1-19/32	40.48	1.5938		S1405138	S1410138	S1415138
		41.00	1.6142		S1455410	S1460410	S1465410
	1-5/8	41.28	1.6250		S1405140	S1410140	S1415140
		42.00	1.6535		S1455420	S1460420	S1465420

ISO	P										M			K									
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○	○	○	○		○	○			◎	○	◎	○	◎	◎	○	◎	○	◎	○			
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	◎	◎					◎																

CARBIDE

HSS

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES


TECHNICAL DATA

YG SPADE DRILLS

SERIES 3, 4

SPADE DRILL INSERTS - HSS M4

🇵🇹 EINWEG BOHREINSATZ - HSS M4
🇫🇷 Plaquettes FORETS A LAME - HSS M4
🇮🇹 CUSPIDI SPADE DRILL - HSS M4

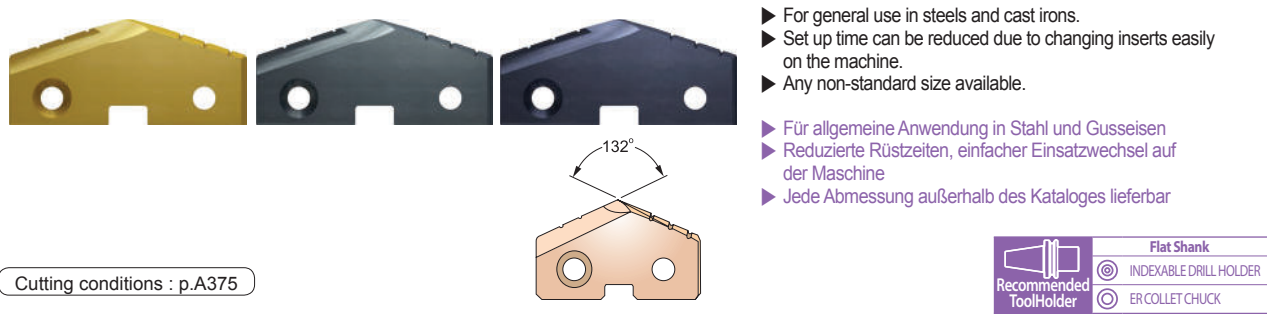

Cutting conditions : p.A375

Series Min. to Max. mm (inch)	Diameter Inch (inch)	Metric (mm)	Decimal (inch)	Thick Metric (mm, inch)	EDP No. HSS M4		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-21/32	42.07	1.6563	6.4 (1/4)	S1405142	S1410142	S1415142
	1-11/16	42.86	1.6875		S1405144	S1410144	S1415144
		43.00	1.6929		S1455430	S1460430	S1465430
	1-23/32	43.66	1.7188		S1405146	S1410146	S1415146
		44.00	1.7323		S1455440	S1460440	S1465440
	1-3/4	44.45	1.7500		S1405148	S1410148	S1415148
		45.00	1.7717		S1455450	S1460450	S1465450
	1-25/32	45.24	1.7813		S1405150	S1410150	S1415150
		46.00	1.8110		S1455460	S1460460	S1465460
	1-13/16	46.04	1.8125		S1405152	S1410152	S1415152
4 Ø46.99 (1.850) to Ø65.28 (2.570)	1-27/32	46.83	1.8438	7.9 (5/16)	S1405154	S1410154	S1415154
		47.00	1.8504		S1455470	S1460470	S1465470
	1-7/8	47.63	1.8750		S1405156	S1410156	S1415156
		48.00	1.8898		S1455480	S1460480	S1465480
	1-29/32	48.42	1.9063		S1405158	S1410158	S1415158
		49.00	1.9291		S1455490	S1460490	S1465490
	1-15/16	49.21	1.9375		S1405160	S1410160	S1415160
		50.00	1.9685		S1455500	S1460500	S1465500
	1-31/32	50.01	1.9688		S1405162	S1410162	S1415162
	2	50.80	2.0000		S1405200	S1410200	S1415200
		51.00	2.0079		S1455510	S1460510	S1465510
	2-1/32	51.59	2.0313		S1405202	S1410202	S1415202
	2-3/64	52.00	2.0472		S1455520	S1460520	S1465520
	2-1/16	52.39	2.0625		S1405204	S1410204	S1415204
		53.00	2.0866		S1455530	S1460530	S1465530
	2-3/32	53.18	2.0938		S1405206	S1410206	S1415206
	2-1/8	53.98	2.1250		S1405208	S1410208	S1415208
		54.00	2.1260		S1455540	S1460540	S1465540
	2-5/32	54.77	2.1563		S1405210	S1410210	S1415210
		55.00	2.1654		S1455550	S1460550	S1465550
	2-3/16	55.56	2.1875		S1405212	S1410212	S1415212
		56.00	2.2047		S1455560	S1460560	S1465560
	2-7/32	56.36	2.2188		S1405214	S1410214	S1415214
		57.00	2.2441		S1455570	S1460570	S1465570

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○			◎	○	◎	○	◎	◎	○	◎	○	◎	○
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	41	42	41	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended	◎	◎					◎													


A304 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions YG-1 CO., LTD.

YG SPADE DRILLS

SERIES 4, 5

SPADE DRILL INSERTS - HSS M4

🇵🇹 EINWEG BOHREINSATZ - HSS M4
🇫🇷 Plaquettes FORETS A LAME - HSS M4
🇮🇹 CUSPIDI SPADE DRILL - HSS M4

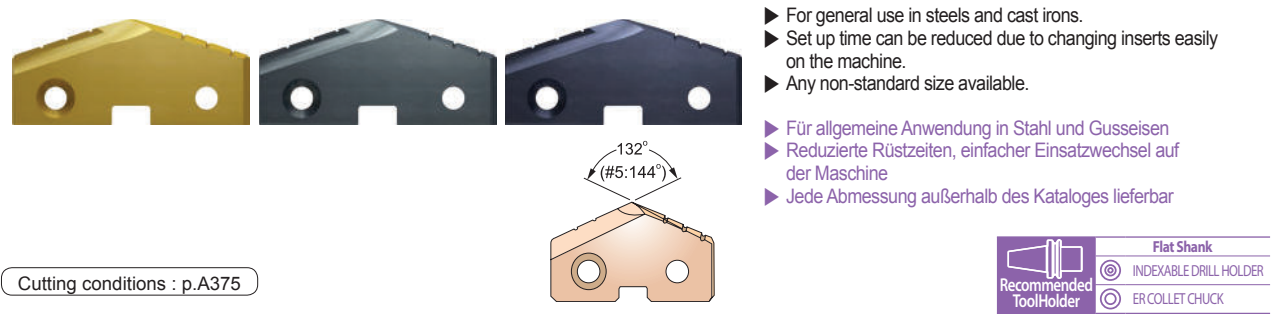

Cutting conditions : p.A375

Series Min. to Max. mm (inch)	Diameter Inch (inch)	Metric (mm)	Decimal (inch)	Thick Metric (mm, inch)	EDP No. HSS M4		
					TiN	TiCN	TiAlN
4 Ø46.99 (1.850) to Ø65.28 (2.570)	2-1/4	57.15	2.2500	7.9 (5/16)	S1405216	S1410216	S1415216
	2-9/32	57.94	2.2813		S1405218	S1410218	S1415218
		58.00	2.2835		S1455580	S1460580	S1465580
	2-5/16	58.74	2.3125		S1405220	S1410220	S1415220
		59.00	2.3228		S1455590	S1460590	S1465590
	2-11/32	59.53	2.3438		S1405222	S1410222	S1415222
		60.00	2.3622		S1455600	S1460600	S1465600
	2-3/8	60.33	2.3750		S1405224	S1410224	S1415224
		61.00	2.4016		S1455610	S1460610	S1465610
	2-13/32	61.12	2.4063		S1405226	S1410226	S1415226
5 Ø62.38 (2.456) to Ø76.20 (3.000)	2-7/16	61.91	2.4375	11.1 (7/16)	S1405228	S1410228	S1415228
		62.00	2.4409		S1455620	S1460620	S1465620
	2-15/32	62.71	2.4688		S1405230	S1410230	S1415230
		63.00	2.4803		S1455630	S1460630	S1465630
	2-1/2	63.50	2.5000		S1405232	S1410232	S1415232
		64.00	2.5197		S1455640	S1460640	S1465640
	2-17/32	64.29	2.5313		S1405234	S1410234	S1415234
		65.00	2.5591		S1455650	S1460650	S1465650
	2-9/16	65.09	2.5625		S1405236	S1410236	S1415236
	2-1/2	63.50	2.5000		S14052D2	S14102D2	S14152D2
		64.00	2.5197		S145564A	S146064A	S146564A
	2-17/32	64.29	2.5313		S14052D4	S14102D4	S14152D4
	2-9/16	65.09	2.5625		S14052D6	S14102D6	S14152D6
	2-19/32	65.88	2.5938		S1405238	S1410238	S1415238
		66.00	2.5984		S1455660	S1460660	S1465660
	2-5/8	66.68	2.6250		S1405240	S1410240	S1415240
	2-21/32	67.47	2.6563		S1405242	S1410242	S1415242
		68.00	2.6772		S1455680	S1460680	S1465680
	2-11/16	68.26	2.6875		S1405244	S1410244	S1415244
	2-23/32	69.05	2.7188		S1405246	S1410246	S1415246
	2-3/4	69.85	2.7500		S1405248	S1410248	S1415248
		70.00	2.7559		S1455700	S1460700	S1465700
	2-25/32	70.64	2.7813		S1405250	S1410250	S1415250
	2-13/16	71.44	2.8125		S1405252	S1410252	S1415252

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○			◎	○	◎	○	◎	◎	○	◎	○	◎	○
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	41	42	41	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended	◎	◎					◎													


YG-1 CO., LTD. phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions A305

SPADE DRILL INSERTS - SUPER HSS T15


-  EINWEG BOHREINSATZ - SUPER HSS T15
 Plaquettes SPADE DRILL - Super HSS T15
 CUSPIDI SPADE DRILL - SUPER HSS T15



- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A376



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-1/2	38.10	1.5000	6.4 (1/4)	S1105132	S1110132	S1115132
	1-17/32	38.89	1.5313		S1105134	S1110134	S1115134
		39.00	1.5354		S1155390	S1160390	S1165390
	1-9/16	39.69	1.5625		S1105136	S1110136	S1115136
		40.00	1.5748		S1155400	S1160400	S1165400
	1-19/32	40.48	1.5938		S1105138	S1110138	S1115138
		41.00	1.6142		S1155410	S1160410	S1165410
	1-5/8	41.28	1.6250		S1105140	S1110140	S1115140
		42.00	1.6535		S1155420	S1160420	S1165420
	1-21/32	42.07	1.6563		S1105142	S1110142	S1115142
	1-11/16	42.86	1.6875		S1105144	S1110144	S1115144
		43.00	1.6929		S1155430	S1160430	S1165430
	1-23/32	43.66	1.7188		S1105146	S1110146	S1115146
		44.00	1.7323		S1155440	S1160440	S1165440
	1-3/4	44.45	1.7500		S1105148	S1110148	S1115148
		45.00	1.7717		S1155450	S1160450	S1165450
	1-25/32	45.24	1.7813		S1105150	S1110150	S1115150
		46.00	1.8110		S1155460	S1160460	S1165460
	1-13/16	46.04	1.8125		S1105152	S1110152	S1115152
	1-27/32	46.83	1.8438		S1105154	S1110154	S1115154
	47.00	1.8504	S1155470	S1160470	S1165470		
	1-7/8	47.63	1.8750	S1105156	S1110156	S1115156	
4 Ø46.99 (1.850) to Ø65.28 (2.570)		48.00	1.8898	7.9 (5/16)	S1155480	S1160480	S1165480
	1-29/32	48.42	1.9063		S1105158	S1110158	S1115158
		49.00	1.9291		S1155490	S1160490	S1165490
	1-15/16	49.21	1.9375		S1105160	S1110160	S1115160
		50.00	1.9685		S1155500	S1160500	S1165500
	1-31/32	50.01	1.9688		S1105162	S1110162	S1115162
	2	50.80	2.0000		S1105200	S1110200	S1115200
		51.00	2.0079		S1155510	S1160510	S1165510
	2-1/32	51.59	2.0313		S1105202	S1110202	S1115202
	2-3/64	52.00	2.0472		S1155520	S1160520	S1165520
	2-1/16	52.39	2.0625		S1105204	S1110204	S1115204
		53.00	2.0866		S1155530	S1160530	S1165530

◎ : Excellent ○ : Good


ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	⊙	⊙	⊙	⊙		⊙	⊙	○	○	○	○	○	○	○	○	⊙	○	⊙	○	⊙			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze/ Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	○	○					○				⊙	○	○	○	○			○					

SPADE DRILL INSERTS - PREMIUM HSS M48


-  EINWEG BOHREINSATZ - PREMIUM HSS M48
 Plaquettes SPADE DRILL - HSS Premium M48
 CUSPIDI SPADE DRILL - PREMIUM HSS M48



- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A377



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)		9.50	.3740	2.4 (3/32)	S1555095	S1560095	S1565095
	3/8	9.53	.3750		S1505024	S1510024	S1515024
		9.80	.3860		S1555098	S1560098	S1565098
	25/64	9.92	.3906		S1505025	S1510025	S1515025
		10.00	.3937		S1555100	S1560100	S1565100
		10.20	.4016		S1555102	S1560102	S1565102
	13/32	10.32	.4063		S1505026	S1510026	S1515026
		10.50	.4134		S1555105	S1560105	S1565105
	27/64	10.72	.4219		S1505027	S1510027	S1515027
		10.80	.4252		S1555108	S1560108	S1565108
Z Ø11.11(.437) to Ø12.95(.510)		11.00	.4331	2.4 (3/32)	S1555110	S1560110	S1565110
	7/16	11.11	.4375		S1505028	S1510028	S1515028
		11.50	.4528		S1555115	S1560115	S1565115
	29/64	11.51	.4531		S1505029	S1510029	S1515029
	15/32	11.91	.4688		S1505030	S1510030	S1515030
		12.00	.4724		S1555120	S1560120	S1565120
	31/64	12.30	.4844		S1505031	S1510031	S1515031
		12.50	.4921		S1555125	S1560125	S1565125
	1/2	12.70	.5000		S1505032	S1510032	S1515032
	O Ø12.98 (.511) to Ø17.65 (.695)		13.00		.5118	3.2 (1/8)	S1555130
33/64		13.10	.5156	S1505033	S1510033		S1515033
17/32		13.49	.5313	S1505034	S1510034		S1515034
		13.50	.5315	S1555135	S1560135		S1565135
35/64		13.89	.5469	S1505035	S1510035		S1515035
		14.00	.5512	S1555140	S1560140		S1565140
9/16		14.29	.5625	S1505036	S1510036		S1515036
		14.50	.5709	S1555145	S1560145		S1565145
37/64		14.68	.5781	S1505037	S1510037		S1515037
		15.00	.5906	S1555150	S1560150		S1565150
19/32		15.08	.5938	S1505038	S1510038		S1515038
39/64		15.48	.6094	S1505039	S1510039		S1515039
		15.50	.6102	S1555155	S1560155		S1565155
5/8		15.88	.6250	S1505040	S1510040		S1515040
		16.00	.6299	S1555160	S1560160		S1565160

◎ : Excellent ○ : Good

ISO	P										M				K									
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21				
HB	125	190	250	270	300	180	270	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended	⊙	⊙	⊙			⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	○	○	⊙	○	⊙	○	⊙				
ISO	N										S										H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRC											15	30	25	38	34			55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	○	○					○				⊙	⊙	⊙	⊙	⊙			⊙						

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

 SPADE DRILLS


SERIES 0, 1

SPADE DRILL INSERTS - PREMIUM HSS M48


-  EINWEG BOHREINSATZ - PREMIUM HSS M48
-  Plaquettes SPADE DRILL - HSS Premium M48
-  CUSPIDI SPADE DRILL - PREMIUM HSS M48



- For use in high temperature alloys and materials with 350~500 Brinell.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.
- Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350~500 Brinell
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A377



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S1505041	S1510041	S1515041
		16.50	.6496		S1555165	S1560165	S1565165
	21/32	16.67	.6563		S1505042	S1510042	S1515042
		17.00	.6693		S1555170	S1560170	S1565170
	43/64	17.07	.6719		S1505043	S1510043	S1515043
	11/16	17.46	.6875		S1505044	S1510044	S1515044
		17.50	.6890		S1555175	S1560175	S1565175
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	S1505045	S1510045	S1515045
		18.00	.7087		S1555180	S1560180	S1565180
	23/32	18.26	.7188		S1505046	S1510046	S1515046
		18.50	.7283		S1555185	S1560185	S1565185
	47/64	18.65	.7344		S1505047	S1510047	S1515047
		19.00	.7480		S1555190	S1560190	S1565190
	3/4	19.05	.7500		S1505048	S1510048	S1515048
	49/64	19.45	.7656		S1505049	S1510049	S1515049
		19.50	.7677		S1555195	S1560195	S1565195
	25/32	19.84	.7813		S1505050	S1510050	S1515050
		20.00	.7874		S1555200	S1560200	S1565200
	51/64	20.24	.7969		S1505051	S1510051	S1515051
		20.50	.8071		S1555205	S1560205	S1565205
	13/16	20.64	.8125		S1505052	S1510052	S1515052
		21.00	.8268		S1555210	S1560210	S1565210
	27/32	21.43	.8438		S1505054	S1510054	S1515054
	55/64	21.83	.8594		S1505055	S1510055	S1515055
		22.00	.8661		S1555220	S1560220	S1565220
	7/8	22.23	.8750		S1505056	S1510056	S1515056
	57/64	22.62	.8906		S1505057	S1510057	S1515057
		23.00	.9055		S1555230	S1560230	S1565230
	29/32	23.02	.9063		S1505058	S1510058	S1515058
	59/64	23.42	.9219		S1505059	S1510059	S1515059
	15/16	23.81	.9375		S1505060	S1510060	S1515060
		24.00	.9449		S1555240	S1560240	S1565240

ISO	P										M					K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	◎	○	◎	○	◎				
ISO	N										S										H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRC											15	30	25	38	34	36	37	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	○	○					○				◎	◎	◎	◎	◎			◎						

A314 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions YG-1 CO., LTD.

 SPADE DRILLS


SERIES 2

SPADE DRILL INSERTS - PREMIUM HSS M48


-  EINWEG BOHREINSATZ - PREMIUM HSS M48
-  Plaquettes SPADE DRILL - HSS Premium M48
-  CUSPIDI SPADE DRILL - PREMIUM HSS M48



- For use in high temperature alloys and materials with 350~500 Brinell.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.
- Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350~500 Brinell
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A377



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1505062	S1510062	S1515062
	63/64	25.00	.9843		S1555250	S1560250	S1565250
	1	25.40	1.0000		S1505100	S1510100	S1515100
	1-1/64	25.80	1.0156		S1505101	S1510101	S1515101
		26.00	1.0236		S1555260	S1560260	S1565260
	1-1/32	26.19	1.0313		S1505102	S1510102	S1515102
	1-3/64	26.59	1.0469		S1505103	S1510103	S1515103
	1-1/16	26.99	1.0625		S1505104	S1510104	S1515104
		27.00	1.0630		S1555270	S1560270	S1565270
	1-3/32	27.78	1.0938		S1505106	S1510106	S1515106
		28.00	1.1024		S1555280	S1560280	S1565280
	1-7/64	28.18	1.1094		S1505107	S1510107	S1515107
	1-1/8	28.58	1.1250		S1505108	S1510108	S1515108
		29.00	1.1417		S1555290	S1560290	S1565290
	1-5/32	29.37	1.1563		S1505110	S1510110	S1515110
		30.00	1.1811		S1555300	S1560300	S1565300
	1-3/16	30.16	1.1875		S1505112	S1510112	S1515112
	1-7/32	30.96	1.2188		S1505114	S1510114	S1515114
		31.00	1.2205		S1555310	S1560310	S1565310
	1-1/4	31.75	1.2500		S1505116	S1510116	S1515116
		32.00	1.2598		S1555320	S1560320	S1565320
	1-9/32	32.54	1.2813		S1505118	S1510118	S1515118
		33.00	1.2992		S1555330	S1560330	S1565330
	1-5/16	33.34	1.3125		S1505120	S1510120	S1515120
		34.00	1.3386		S1555340	S1560340	S1565340
	1-11/32	34.13	1.3438		S1505122	S1510122	S1515122
	1-3/8	34.93	1.3750		S1505124	S1510124	S1515124
		35.00	1.3780		S1555350	S1560350	S1565350

ISO	P											M			K								◎ : Excellent ○ : Good			
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20						
H Rc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230						
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	◎	○	◎	○	◎						
ISO	N										S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
H Rc											15	30	25	38	34			55	60	42	55					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550					
Recommended	○	○					○				◎	◎	◎	◎	◎			◎								

 SPADE DRILLS

SERIES **Y, Z, 0**


SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- 🇩🇪 EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- 🇫🇷 Plaquettes SPADE DRILL pour la fonte - Carbure K10
- 🇮🇹 CUSPIDI SPADE DRILL - MD K10




- ▶ High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10		
				TiN	TiCN	TiAlN	
Y Ø9.50 (.374) to Ø11.07 (.436)		9.50	.3740	2.4 (3/32)	S1655095	S1660095	S1665095
	3/8	9.53	.3750		S1605024	S1610024	S1615024
		9.80	.3860		S1655098	S1660098	S1665098
	25/64	9.92	.3906		S1605025	S1610025	S1615025
		10.00	.3937		S1655100	S1660100	S1665100
		10.20	.4016		S1655102	S1660102	S1665102
	13/32	10.32	.4063		S1605026	S1610026	S1615026
		10.50	.4134		S1655105	S1660105	S1665105
	27/64	10.72	.4219		S1605027	S1610027	S1615027
		10.80	.4252		S1655108	S1660108	S1665108
	11.00	.4331	S1655110	S1660110	S1665110		
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	.4375	2.4 (3/32)	S1605028	S1610028	S1615028
		11.50	.4528		S1655115	S1660115	S1665115
	29/64	11.51	.4531		S1605029	S1610029	S1615029
	15/32	11.91	.4688		S1605030	S1610030	S1615030
		12.00	.4724		S1655120	S1660120	S1665120
	31/64	12.30	.4844		S1605031	S1610031	S1615031
		12.50	.4921		S1655125	S1660125	S1665125
	1/2	12.70	.5000		S1605032	S1610032	S1615032
O Ø12.98 (.511) to Ø17.65 (.695)		13.00	.5118	3.2 (1/8)	S1655130	S1660130	S1665130
	33/64	13.10	.5156		S1605033	S1610033	S1615033
	17/32	13.49	.5313		S1605034	S1610034	S1615034
		13.50	.5315		S1655135	S1660135	S1665135
	35/64	13.89	.5469		S1605035	S1610035	S1615035
		14.00	.5512		S1655140	S1660140	S1665140
	9/16	14.29	.5625		S1605036	S1610036	S1615036
		14.50	.5709		S1655145	S1660145	S1665145
	37/64	14.68	.5781		S1605037	S1610037	S1615037
		15.00	.5906		S1655150	S1660150	S1665150
	19/32	15.08	.5938		S1605038	S1610038	S1615038
	39/64	15.48	.6094		S1605039	S1610039	S1615039
		15.50	.6102		S1655155	S1660155	S1665155
	5/8	15.88	.6250		S1605040	S1610040	S1615040
		16.00	.6299		S1655160	S1660160	S1665160

◎ : Excellent ○ : Good

ISO	P											M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC																							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended															◎	◎	◎	◎	◎	◎			
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC																							
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended																							

A316 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG YG-1 CO., LTD.

 SPADE DRILLS

SERIES **0, 1**


SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- 🇩🇪 EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- 🇫🇷 Plaquettes SPADE DRILL pour la fonte - Carbure K10
- 🇮🇹 CUSPIDI SPADE DRILL - MD K10



- ▶ High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.			
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10			
				TiN	TiCN	TiAlN		
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S1605041	S1610041	S1615041	
		16.50	.6496		S1655165	S1660165	S1665165	
	21/32	16.67	.6563		S1605042	S1610042	S1615042	
		17.00	.6693		S1655170	S1660170	S1665170	
	43/64	17.07	.6719		S1605043	S1610043	S1615043	
	11/16	17.46	.6875		S1605044	S1610044	S1615044	
		17.50	.6890		S1655175	S1660175	S1665175	
					S1605045	S1610045	S1615045	
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	S1655180	S1660180	S1665180	
		18.00	.7087		S1605046	S1610046	S1615046	
	23/32	18.26	.7188		S1655185	S1660185	S1665185	
		18.50	.7283		S1605047	S1610047	S1615047	
	47/64	18.65	.7344		S1655190	S1660190	S1665190	
		19.00	.7480		S1605048	S1610048	S1615048	
	3/4	19.05	.7500		S1605049	S1610049	S1615049	
	49/64	19.45	.7656		S1655195	S1660195	S1665195	
		19.50	.7677		S1605050	S1610050	S1615050	
	25/32	19.84	.7813		S1655200	S1660200	S1665200	
		20.00	.7874		S1605051	S1610051	S1615051	
	51/64	20.24	.7969		S1655205	S1660205	S1665205	
		20.50	.8071		S1605052	S1610052	S1615052	
	13/16	20.64	.8125		S1655210	S1660210	S1665210	
		21.00	.8268		S1605054	S1610054	S1615054	
	27/32	21.43	.8438		S1605055	S1610055	S1615055	
	55/64	21.83	.8594		S1655220	S1660220	S1665220	
		22.00	.8661		S1605056	S1610056	S1615056	
	7/8	22.23	.8750		S1605057	S1610057	S1615057	
	57/64	22.62	.8906		S1655230	S1660230	S1665230	
		23.00	.9055		S1605058	S1610058	S1615058	
	29/32	23.02	.9063		S1605059	S1610059	S1615059	
	59/64	23.42	.9219		S1605060	S1610060	S1615060	
	15/16	23.81	.9375		S1655240	S1660240	S1665240	
			24.00		.9449			

◎ : Excellent ○ : Good

ISO	P										M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
Hrc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended															⊙	⊙	⊙	⊙	⊙	⊙		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
Hrc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended																						

 SPADE DRILLS

SERIES 0, 1


SPADE DRILL INSERTS - CARBIDE K20

- 🇩🇪 EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- 🇮🇹 Plaquettes SPADE DRILL - Carbure K20
- 🇮🇹 CUSPIDI SPADE DRILL - MD K20




- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.

- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K20		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S1705041	S1710041	S1715041
		16.50	.6496		S1755165	S1760165	S1765165
	21/32	16.67	.6563		S1705042	S1710042	S1715042
		17.00	.6693		S1755170	S1760170	S1765170
	43/64	17.07	.6719		S1705043	S1710043	S1715043
1 Ø17.53 (.690) to Ø24.38 (.960)	11/16	17.46	.6875	4.0 (5/32)	S1705044	S1710044	S1715044
		17.50	.6890		S1755175	S1760175	S1765175
	45/64	17.86	.7031		S1705045	S1710045	S1715045
		18.00	.7087		S1755180	S1760180	S1765180
	23/32	18.26	.7188		S1705046	S1710046	S1715046
		18.50	.7283		S1755185	S1760185	S1765185
	47/64	18.65	.7344		S1705047	S1710047	S1715047
		19.00	.7480		S1755190	S1760190	S1765190
	3/4	19.05	.7500		S1705048	S1710048	S1715048
	49/64	19.45	.7656		S1705049	S1710049	S1715049
		19.50	.7677		S1755195	S1760195	S1765195
	25/32	19.84	.7813		S1705050	S1710050	S1715050
		20.00	.7874		S1755200	S1760200	S1765200
	51/64	20.24	.7969		S1705051	S1710051	S1715051
		20.50	.8071		S1755205	S1760205	S1765205
	13/16	20.64	.8125		S1705052	S1710052	S1715052
		21.00	.8268		S1755210	S1760210	S1765210
	27/32	21.43	.8438		S1705054	S1710054	S1715054
	55/64	21.83	.8594		S1705055	S1710055	S1715055
		22.00	.8661		S1755220	S1760220	S1765220
	7/8	22.23	.8750		S1705056	S1710056	S1715056
	57/64	22.62	.8906		S1705057	S1710057	S1715057
		23.00	.9055		S1755230	S1760230	S1765230
	29/32	23.02	.9063		S1705058	S1710058	S1715058
	59/64	23.42	.9219		S1705059	S1710059	S1715059
	15/16	23.81	.9375		S1705060	S1710060	S1715060
		24.00	.9449		S1755240	S1760240	S1765240

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○		○		○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○				

A320 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

 SPADE DRILLS

SERIES 2

SPADE DRILL INSERTS - CARBIDE K20

- 🇩🇪 EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- 🇮🇹 Plaquettes SPADE DRILL - Carbure K20
- 🇮🇹 CUSPIDI SPADE DRILL - MD K20



- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.

- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar

Cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K20		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1705062	S1710062	S1715062
	63/64	25.00	.9843		S1755250	S1760250	S1765250
	1	25.40	1.0000		S1705100	S1710100	S1715100
	1-1/64	25.80	1.0156		S1705101	S1710101	S1715101
		26.00	1.0236		S1755260	S1760260	S1765260
	1-1/32	26.19	1.0313		S1705102	S1710102	S1715102
	1-3/64	26.59	1.0469		S1705103	S1710103	S1715103
	1-1/16	26.99	1.0625		S1705104	S1710104	S1715104
		27.00	1.0630		S1755270	S1760270	S1765270
	1-3/32	27.78	1.0938		S1705106	S1710106	S1715106
		28.00	1.1024		S1755280	S1760280	S1765280
	1-7/64	28.18	1.1094		S1705107	S1710107	S1715107
	1-1/8	28.58	1.1250		S1705108	S1710108	S1715108
		29.00	1.1417		S1755290	S1760290	S1765290
	1-5/32	29.37	1.1563		S1705110	S1710110	S1715110
		30.00	1.1811		S1755300	S1760300	S1765300
	1-3/16	30.16	1.1875		S1705112	S1710112	S1715112
	1-7/32	30.96	1.2188		S1705114	S1710114	S1715114
		31.00	1.2205		S1755310	S1760310	S1765310
	1-1/4	31.75	1.2500		S1705116	S1710116	S1715116
		32.00	1.2598		S1755320	S1760320	S1765320
	1-9/32	32.54	1.2813		S1705118	S1710118	S1715118
		33.00	1.2992		S1755330	S1760330	S1765330
	1-5/16	33.34	1.3125		S1705120	S1710120	S1715120
		34.00	1.3386		S1755340	S1760340	S1765340
	1-11/32	34.13	1.3438		S1705122	S1710122	S1715122
	1-3/8	34.93	1.3750		S1705124	S1710124	S1715124
		35.00	1.3780		S1755350	S1760350	S1765350

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○
ISO	N										S						H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	
HRC											15	30	25	34	34			55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○		

 SPADE DRILLS

SERIES 0, 1


SPADE DRILL INSERTS - CARBIDE P40

- 🇩🇪 EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- 🇮🇹 Plaquettes SPADE DRILL - Carbure P40
- 🇮🇹 CUSPIDI SPADE DRILL - MD P40




- For general use in carbon steels and alloy steels.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A380



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE P40		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S1805041	S1810041	S1815041
		16.50	.6496		S1855165	S1860165	S1865165
	21/32	16.67	.6563		S1805042	S1810042	S1815042
		17.00	.6693		S1855170	S1860170	S1865170
	43/64	17.07	.6719		S1805043	S1810043	S1815043
1 Ø17.53 (.690) to Ø24.38 (.960)	11/16	17.46	.6875	4.0 (5/32)	S1805044	S1810044	S1815044
		17.50	.6890		S1855175	S1860175	S1865175
	45/64	17.86	.7031		S1805045	S1810045	S1815045
		18.00	.7087		S1855180	S1860180	S1865180
	23/32	18.26	.7188		S1805046	S1810046	S1815046
		18.50	.7283		S1855185	S1860185	S1865185
	47/64	18.65	.7344		S1805047	S1810047	S1815047
		19.00	.7480		S1855190	S1860190	S1865190
	3/4	19.05	.7500		S1805048	S1810048	S1815048
	49/64	19.45	.7656		S1805049	S1810049	S1815049
		19.50	.7677		S1855195	S1860195	S1865195
	25/32	19.84	.7813		S1805050	S1810050	S1815050
		20.00	.7874		S1855200	S1860200	S1865200
	51/64	20.24	.7969		S1805051	S1810051	S1815051
		20.50	.8071		S1855205	S1860205	S1865205
	13/16	20.64	.8125		S1805052	S1810052	S1815052
		21.00	.8268		S1855210	S1860210	S1865210
	27/32	21.43	.8438		S1805054	S1810054	S1815054
	55/64	21.83	.8594		S1805055	S1810055	S1815055
		22.00	.8661		S1855220	S1860220	S1865220
	7/8	22.23	.8750		S1805056	S1810056	S1815056
	57/64	22.62	.8906		S1805057	S1810057	S1815057
		23.00	.9055		S1855230	S1860230	S1865230
	29/32	23.02	.9063		S1805058	S1810058	S1815058
	59/64	23.42	.9219		S1805059	S1810059	S1815059
	15/16	23.81	.9375		S1805060	S1810060	S1815060
		24.00	.9449		S1855240	S1860240	S1865240

◎ : Excellent ○ : Good

ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○					○				○	○	○	○	○			◎			

A324 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

 SPADE DRILLS

SERIES 2

SPADE DRILL INSERTS - CARBIDE P40

- 🇩🇪 EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- 🇮🇹 Plaquettes SPADE DRILL - Carbure P40
- 🇮🇹 CUSPIDI SPADE DRILL - MD P40



- For general use in carbon steels and alloy steels.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar

Cutting conditions : p.A380



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE P40		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1805062	S1810062	S1815062
	63/64	25.00	.9843		S1855250	S1860250	S1865250
	1	25.40	1.0000		S1805100	S1810100	S1815100
	1-1/64	25.80	1.0156		S1805101	S1810101	S1815101
		26.00	1.0236		S1855260	S1860260	S1865260
	1-1/32	26.19	1.0313		S1805102	S1810102	S1815102
	1-3/64	26.59	1.0469		S1805103	S1810103	S1815103
	1-1/16	26.99	1.0625		S1805104	S1810104	S1815104
		27.00	1.0630		S1855270	S1860270	S1865270
	1-3/32	27.78	1.0938		S1805106	S1810106	S1815106
		28.00	1.1024		S1855280	S1860280	S1865280
	1-7/64	28.18	1.1094		S1805107	S1810107	S1815107
	1-1/8	28.58	1.1250		S1805108	S1810108	S1815108
		29.00	1.1417		S1855290	S1860290	S1865290
	1-5/32	29.37	1.1563		S1805110	S1810110	S1815110
		30.00	1.1811		S1855300	S1860300	S1865300
	1-3/16	30.16	1.1875		S1805112	S1810112	S1815112
	1-7/32	30.96	1.2188		S1805114	S1810114	S1815114
		31.00	1.2205		S1855310	S1860310	S1865310
	1-1/4	31.75	1.2500		S1805116	S1810116	S1815116
		32.00	1.2598		S1855320	S1860320	S1865320
	1-9/32	32.54	1.2813		S1805118	S1810118	S1815118
		33.00	1.2992		S1855330	S1860330	S1865330
	1-5/16	33.34	1.3125		S1805120	S1810120	S1815120
		34.00	1.3386		S1855340	S1860340	S1865340
	1-11/32	34.13	1.3438		S1805122	S1810122	S1815122
	1-3/8	34.93	1.3750		S1805124	S1810124	S1815124
		35.00	1.3780		S1855350	S1860350	S1865350

◎ : Excellent ○ : Good

ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○					○				○	○	○	○	○			◎			

Y/G SPADE DRILLS


SERIES **3**

SPADE DRILL INSERTS - CARBIDE P40


- EINWEG BOHREINSATZ - VOLLHARTMETALL P40**
- Plaquettes SPADE DRILL - Carbure P40**
- CUSPIDI SPADE DRILL - MD P40**



- For general use in carbon steels and alloy steels.
- Set up time can be reduced due to changing inserts easily on the machine.
- Any non-standard size available.
- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A380



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4063	6.4 (1/4)	S1805126	S1810126	S1815126
		36.00	1.4173		S1855360	S1860360	S1865360
	1-7/16	36.51	1.4375		S1805128	S1810128	S1815128
		37.00	1.4567		S1855370	S1860370	S1865370
	1-15/32	37.31	1.4688		S1805130	S1810130	S1815130
		38.00	1.4961		S1855380	S1860380	S1865380
	1-1/2	38.10	1.5000		S1805132	S1810132	S1815132
	1-17/32	38.89	1.5313		S1805134	S1810134	S1815134
		39.00	1.5354		S1855390	S1860390	S1865390
	1-9/16	39.69	1.5625		S1805136	S1810136	S1815136
		40.00	1.5748		S1855400	S1860400	S1865400
	1-19/32	40.48	1.5938		S1805138	S1810138	S1815138
		41.00	1.6142		S1855410	S1860410	S1865410
	1-5/8	41.28	1.6250		S1805140	S1810140	S1815140
		42.00	1.6535		S1855420	S1860420	S1865420
	1-21/32	42.07	1.6563		S1805142	S1810142	S1815142
	1-11/16	42.86	1.6875		S1805144	S1810144	S1815144
		43.00	1.6929		S1855430	S1860430	S1865430
	1-23/32	43.66	1.7188		S1805146	S1810146	S1815146
		44.00	1.7323		S1855440	S1860440	S1865440
	1-3/4	44.45	1.7500		S1805148	S1810148	S1815148
		45.00	1.7717		S1855450	S1860450	S1865450
	1-25/32	45.24	1.7813		S1805150	S1810150	S1815150
		46.00	1.8110		S1855460	S1860460	S1865460
	1-13/16	46.04	1.8125		S1805152	S1810152	S1815152
	1-27/32	46.83	1.8438		S1805154	S1810154	S1815154
		47.00	1.8504		S1855470	S1860470	S1865470
	1-7/8	47.63	1.8750		S1805156	S1810156	S1815156

																				◎ : Excellent ○ : Good									
ISO	P										M					K													
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20									
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21									
HB		125	190	250	300	180	275	300	350	200	325	200	240	180		180	260	160	250	130	230								
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○		○	○	○	○	○									
ISO	N										S										H								
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41								
HRC											15	30	25	38	34			55	60	42	55								
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550								
Recommended	○	○					○				○	○		○	○			◎											

Y/G Special features of SM-Point Spade Drill

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".

This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

Multiple thinning form at the bottom of the large thinning.

- The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.

Radius back face
► Wide chip space

Multiple web thinning with the cutting edge of small web thinning.

- Good self-centering
- Less tool lead off
- Reduction in bell mouching, thrust
- Increased stability

Four-facet point
► Self-centering
► Less thrust force

 SPADE DRILLS

SERIES 1


SM-POINT SPADE DRILL INSERTS - HSS M4

-  SM-POINT EINWEG BOHREINSATZ - HSS M4
-  Plaquettes SPADE DRILL, pointe SM - HSS M4
-  CUSPIDI, SM-POINT - HSS M4




- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelteQ uerschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A375



Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	HSS M4		
					TiN	TiCN	TiAlN
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	SM405045	SM410045	SM415045
		18.00	.7087		SM455180	SM460180	SM465180
	23/32	18.26	.7188		SM405046	SM410046	SM415046
		18.50	.7283		SM455185	SM460185	SM465185
	47/64	18.65	.7344		SM405047	SM410047	SM415047
		19.00	.7480		SM455190	SM460190	SM465190
	3/4	19.05	.7500		SM405048	SM410048	SM415048
	49/64	19.45	.7656		SM405049	SM410049	SM415049
		19.50	.7677		SM455195	SM460195	SM465195
	25/32	19.84	.7812		SM405050	SM410050	SM415050
		20.00	.7874		SM455200	SM460200	SM465200
	51/64	20.24	.7969		SM405051	SM410051	SM415051
		20.50	.8071		SM455205	SM460205	SM465205
	13/16	20.64	.8125		SM405052	SM410052	SM415052
		21.00	.8268		SM455210	SM460210	SM465210
	27/32	21.43	.8438		SM405054	SM410054	SM415054
	55/64	21.83	.8594		SM405055	SM410055	SM415055
		22.00	.8661		SM455220	SM460220	SM465220
	7/8	22.23	.8750		SM405056	SM410056	SM415056
	57/64	22.62	.8906		SM405057	SM410057	SM415057
		23.00	.9055		SM455230	SM460230	SM465230
	29/32	23.02	.9062		SM405058	SM410058	SM415058
	59/64	23.42	.9219		SM405059	SM410059	SM415059
	15/16	23.81	.9375		SM405060	SM410060	SM415060
		24.00	.9449		SM455240	SM460240	SM465240

◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○		○	○								◎	○	◎	○	◎	○		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	◎	◎					◎															

 SPADE DRILLS

SERIES 2


SM-POINT SPADE DRILL INSERTS - HSS M4

-  SM-POINT EINWEG BOHREINSATZ - HSS M4
-  Plaquettes SPADE DRILL, pointe SM - HSS M4
-  CUSPIDI, SM-POINT - HSS M4




- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelteQ uerschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A375



Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	HSS M4		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM405062	SM410062	SM415062
	63/64	25.00	.9843		SM455250	SM460250	SM465250
	1	25.40	1.0000		SM405100	SM410100	SM415100
	1-1/64	25.80	1.0156		SM405101	SM410101	SM415101
		26.00	1.0236		SM455260	SM460260	SM465260
	1-1/32	26.19	1.0312		SM405102	SM410102	SM415102
	1-3/64	26.59	1.0469		SM405103	SM410103	SM415103
	1-1/16	26.99	1.0625		SM405104	SM410104	SM415104
		27.00	1.0630		SM455270	SM460270	SM465270
	1-3/32	27.78	1.0938		SM405106	SM410106	SM415106
		28.00	1.1024		SM455280	SM460280	SM465280
	1-7/64	28.18	1.1094		SM405107	SM410107	SM415107
	1-1/8	28.58	1.1250		SM405108	SM410108	SM415108
		29.00	1.1417		SM455290	SM460290	SM465290
	1-5/32	29.37	1.1562		SM405110	SM410110	SM415110
		30.00	1.1811		SM455300	SM460300	SM465300
	1-3/16	30.16	1.1875		SM405112	SM410112	SM415112
	1-7/32	30.96	1.2188		SM405114	SM410114	SM415114
		31.00	1.2205		SM455310	SM460310	SM465310
	1-1/4	31.75	1.2500		SM405116	SM410116	SM415116
		32.00	1.2598		SM455320	SM460320	SM465320
	1-9/32	32.54	1.2812		SM405118	SM410118	SM415118
		33.00	1.2992		SM455330	SM460330	SM465330
	1-5/16	33.34	1.3125		SM405120	SM410120	SM415120
		34.00	1.3386		SM455340	SM460340	SM465340
	1-11/32	34.13	1.3438		SM405122	SM410122	SM415122
	1-3/8	34.93	1.3750		SM405124	SM410124	SM415124
		35.00	1.3780		SM455350	SM460350	SM465350

◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○		○	○								◎	○	◎	○	◎	○		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	◎	◎					◎															

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

YG SPADE DRILLS

SERIES **3**


SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4




- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Q uerschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A375



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	6.4 (1/4)	SM405126	SM410126	SM415126
		36.00	1.4173		SM455360	SM460360	SM465360
	1-7/16	36.51	1.4375		SM405128	SM410128	SM415128
		37.00	1.4567		SM455370	SM460370	SM465370
	1-15/32	37.31	1.4688		SM405130	SM410130	SM415130
		38.00	1.4961		SM455380	SM460380	SM465380
	1-1/2	38.10	1.5000		SM405132	SM410132	SM415132
	1-17/32	38.89	1.5312		SM405134	SM410134	SM415134
		39.00	1.5354		SM455390	SM460390	SM465390
	1-9/16	39.69	1.5625		SM405136	SM410136	SM415136
		40.00	1.5748		SM455400	SM460400	SM465400
	1-19/32	40.48	1.5938		SM405138	SM410138	SM415138
		41.00	1.6142		SM455410	SM460410	SM465410
	1-5/8	41.28	1.6250		SM405140	SM410140	SM415140
		42.00	1.6535		SM455420	SM460420	SM465420
	1-21/32	42.07	1.6562		SM405142	SM410142	SM415142
	1-11/16	42.86	1.6875		SM405144	SM410144	SM415144
		43.00	1.6929		SM455430	SM460430	SM465430
	1-23/32	43.66	1.7188		SM405146	SM410146	SM415146
		44.00	1.7323		SM455440	SM460440	SM465440
	1-3/4	44.45	1.7500		SM405148	SM410148	SM415148
		45.00	1.7717		SM455450	SM460450	SM465450
	1-25/32	45.24	1.7812		SM405150	SM410150	SM415150
		46.00	1.8110		SM455460	SM460460	SM465460
	1-13/16	46.04	1.8125		SM405152	SM410152	SM415152
	1-27/32	46.83	1.8438		SM405154	SM410154	SM415154
		47.00	1.8504		SM455470	SM460470	SM465470
	1-7/8	47.63	1.8750		SM405156	SM410156	SM415156

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○		○	○								◎	○	◎	○	◎	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎														

A330 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions **YG-1 CO., LTD.**

YG SPADE DRILLS


SERIES **Y, Z, O**

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15


- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI, SM-POINT - HSS T15



- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Q uerschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A376



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)		9.50	.3740	2.4 (3/32)	SM155095	SM160095	SM165095
	3/8	9.53	.3750		SM105024	SM110024	SM115024
		9.80	.3858		SM155098	SM160098	SM165098
	25/64	9.92	.3906		SM105025	SM110025	SM115025
		10.00	.3937		SM155100	SM160100	SM165100
		10.20	.4016		SM155102	SM160102	SM165102
	13/32	10.32	.4062		SM105026	SM110026	SM115026
		10.50	.4134		SM155105	SM160105	SM165105
	27/64	10.72	.4219		SM105027	SM110027	SM115027
		10.80	.4252		SM155108	SM160108	SM165108
		11.00	.4331		SM155110	SM160110	SM165110
	Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11		.4375	2.4 (3/32)	SM105028
		11.50	.4528	SM155115	SM160115		SM165115
29/64		11.51	.4531	SM105029	SM110029		SM115029
15/32		11.91	.4688	SM105030	SM110030		SM115030
		12.00	.4724	SM155120	SM160120		SM165120
31/64		12.30	.4844	SM105031	SM110031		SM115031
		12.50	.4921	SM155125	SM160125		SM165125
1/2		12.70	.5000	SM105032	SM110032		SM115032
		13.00	.5118	SM155130	SM160130		SM165130
33/64		13.10	.5156	SM105033	SM110033		SM115033
17/32		13.49	.5312	SM105034	SM110034		SM115034
		13.50	.5315	SM155135	SM160135		SM165135
O Ø12.98 (.511) to Ø17.65 (.695)	35/64	13.89	.5469	3.2 (1/8)	SM105035	SM110035	SM115035
		14.00	.5512		SM155140	SM160140	SM165140
	9/16	14.29	.5625		SM105036	SM110036	SM115036
		14.50	.5709		SM155145	SM160145	SM165145
	37/64	14.68	.5781		SM105037	SM110037	SM115037
		15.00	.5906		SM155150	SM160150	SM165150
	19/32	15.08	.5938		SM105038	SM110038	SM115038
	39/64	15.48	.6094		SM105039	SM110039	SM115039
		15.50	.6102		SM155155	SM160155	SM165155
	5/8	15.88	.6250		SM105040	SM110040	SM115040
		16.00	.6299		SM155160	SM160160	SM165160

ISO	P											M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎		◎	◎	○	○	○	◎	○	○	○	○	◎	○	◎	○	◎		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○					○				◎	○	○	○	○			○				

CARBIDE

HSS

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES


TECHNICAL DATA

YG SPADE DRILLS


SERIES **0, 1**

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15

- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI DI FORATURA SM-POINT - SUPER HSS T15

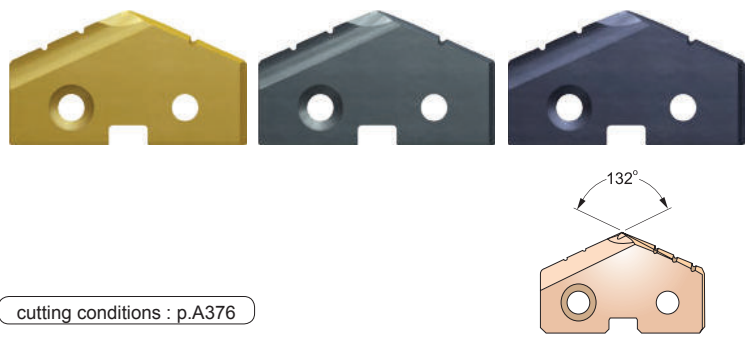

- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Q uerschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A376

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	SUPER HSS T15		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM105041	SM110041	SM115041
		16.50	.6496		SM155165	SM160165	SM165165
	21/32	16.67	.6562		SM105042	SM110042	SM115042
		17.00	.6693		SM155170	SM160170	SM165170
	43/64	17.07	.6719		SM105043	SM110043	SM115043
1 Ø17.53 (.690) to Ø24.38 (.960)		17.46	.6875	4.0 (5/32)	SM105044	SM110044	SM115044
		17.50	.6890		SM155175	SM160175	SM165175
	45/64	17.86	.7031		SM105045	SM110045	SM115045
		18.00	.7087		SM155180	SM160180	SM165180
	23/32	18.26	.7188		SM105046	SM110046	SM115046
		18.50	.7283		SM155185	SM160185	SM165185
	47/64	18.65	.7344		SM105047	SM110047	SM115047
		19.00	.7480		SM155190	SM160190	SM165190
	3/4	19.05	.7500		SM105048	SM110048	SM115048
	49/64	19.45	.7656		SM105049	SM110049	SM115049
		19.50	.7677		SM155195	SM160195	SM165195
	25/32	19.84	.7812		SM105050	SM110050	SM115050
		20.00	.7874		SM155200	SM160200	SM165200
	51/64	20.24	.7969		SM105051	SM110051	SM115051
		20.50	.8071		SM155205	SM160205	SM165205
	13/16	20.64	.8125		SM105052	SM110052	SM115052
		21.00	.8268		SM155210	SM160210	SM165210
	27/32	21.43	.8438		SM105054	SM110054	SM115054
	55/64	21.83	.8594		SM105055	SM110055	SM115055
		22.00	.8661		SM155220	SM160220	SM165220
	7/8	22.23	.8750		SM105056	SM110056	SM115056
	57/64	22.62	.8906		SM105057	SM110057	SM115057
		23.00	.9055		SM155230	SM160230	SM165230
	29/32	23.02	.9062		SM105058	SM110058	SM115058
	59/64	23.42	.9219		SM105059	SM110059	SM115059
	15/16	23.81	.9375		SM105060	SM110060	SM115060
		24.00	.9449		SM155240	SM160240	SM165240

ISO	P														M				K						◎ : Excellent ○ : Good			
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20								
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21								
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230								
Recommended	◎	◎	◎	◎		◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎								
ISO	N										S						H											
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41							
HRC											15	30	25	38	34			55	60	42	55							
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550							
Recommended	○	○					○				◎	○	○	○	○			○										


A332 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions **YG-1 CO., LTD.**

YG SPADE DRILLS


SERIES **2**

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15

- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI DI FORATURA SM-POINT - SUPER HSS T15

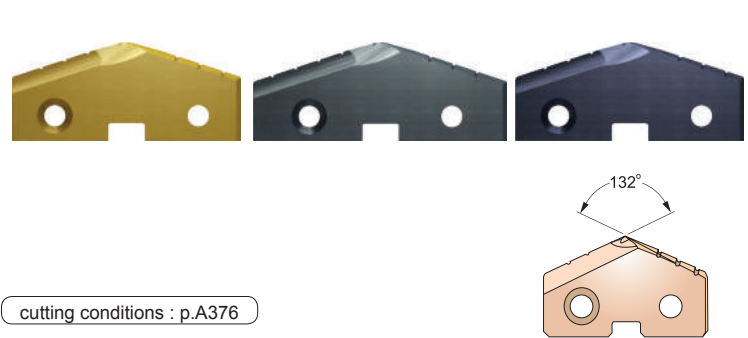

- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Q uerschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A376


Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	SUPER HSS T15		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM105062	SM110062	SM115062
	63/64	25.00	.9843		SM155250	SM160250	SM165250
	1	25.40	1.0000		SM105100	SM110100	SM115100
	1-1/64	25.80	1.0156		SM105101	SM110101	SM115101
		26.00	1.0236		SM155260	SM160260	SM165260
	1-1/32	26.19	1.0312		SM105102	SM110102	SM115102
	1-3/64	26.59	1.0469		SM105103	SM110103	SM115103
	1-1/16	26.99	1.0625		SM105104	SM110104	SM115104
		27.00	1.0630		SM155270	SM160270	SM165270
	1-3/32	27.78	1.0938		SM105106	SM110106	SM115106
		28.00	1.1024		SM155280	SM160280	SM165280
	1-7/64	28.18	1.1094		SM105107	SM110107	SM115107
	1-1/8	28.58	1.1250		SM105108	SM110108	SM115108
		29.00	1.1417		SM155290	SM160290	SM165290
	1-5/32	29.37	1.1562		SM105110	SM110110	SM115110
		30.00	1.1811		SM155300	SM160300	SM165300
	1-3/16	30.16	1.1875		SM105112	SM110112	SM115112
	1-7/32	30.96	1.2188		SM105114	SM110114	SM115114
		31.00	1.2205		SM155310	SM160310	SM165310
	1-1/4	31.75	1.2500		SM105116	SM110116	SM115116
		32.00	1.2598		SM155320	SM160320	SM165320
	1-9/32	32.54	1.2812		SM105118	SM110118	SM115118
		33.00	1.2992		SM155330	SM160330	SM165330
	1-5/16	33.34	1.3125		SM105120	SM110120	SM115120
		34.00	1.3386		SM155340	SM160340	SM165340
	1-11/32	34.13	1.3438		SM105122	SM110122	SM115122
	1-3/8	34.93	1.3750		SM105124	SM110124	SM115124
		35.00	1.3780		SM155350	SM160350	SM165350

																				◎ : Excellent ○ : Good			
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	◎	◎		◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	○	○					○				◎	○	○	○	○			○					

YG-1 CO., LTD. phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions **A333**

SM-POINT SPADE DRILL INSERTS - PREMIUM HSS M48

 **SM-POINT EINWEG BOHREINSATZ - PREMIUM HSS M48**
 Plaquettes SPADE DRILL, pointe SM - HSS Premium M48
 **CUSPIDI, SM-POINT - PREMIUM HSS M48**



Cutting conditions : p.A377

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM505062	SM510062	SM515062
	63/64	25.00	.9843		SM555250	SM560250	SM565250
	1	25.40	1.0000		SM505100	SM510100	SM515100
	1-1/64	25.80	1.0156		SM505101	SM510101	SM515101
		26.00	1.0236		SM555260	SM560260	SM565260
	1-1/32	26.19	1.0312		SM505102	SM510102	SM515102
	1-3/64	26.59	1.0469		SM505103	SM510103	SM515103
	1-1/16	26.99	1.0625		SM505104	SM510104	SM515104
		27.00	1.0630		SM555270	SM560270	SM565270
	1-3/32	27.78	1.0938		SM505106	SM510106	SM515106
		28.00	1.1024		SM555280	SM560280	SM565280
	1-7/64	28.18	1.1094		SM505107	SM510107	SM515107
	1-1/8	28.58	1.1250		SM505108	SM510108	SM515108
		29.00	1.1417		SM555290	SM560290	SM565290
	1-5/32	29.37	1.1562		SM505110	SM510110	SM515110
		30.00	1.1811		SM555300	SM560300	SM565300
	1-3/16	30.16	1.1875		SM505112	SM510112	SM515112
	1-7/32	30.96	1.2188		SM505114	SM510114	SM515114
		31.00	1.2205		SM555310	SM560310	SM565310
	1-1/4	31.75	1.2500		SM505116	SM510116	SM515116
		32.00	1.2598		SM555320	SM560320	SM565320
	1-9/32	32.54	1.2812		SM505118	SM510118	SM515118
		33.00	1.2992		SM555330	SM560330	SM565330
	1-5/16	33.34	1.3125		SM505120	SM510120	SM515120
		34.00	1.3386		SM555340	SM560340	SM565340
	1-11/32	34.13	1.3438		SM505122	SM510122	SM515122
	1-3/8	34.93	1.3750		SM505124	SM510124	SM515124
		35.00	1.3780		SM555350	SM560350	SM565350

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HrC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	◎	○	◎	○	◎	
ISO	N										S				H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HrC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○					○				◎	◎	◎	◎	◎			◎			

 SPADE DRILLS


SERIES **Y, Z, 0**

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10


-  SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
-  Plaquettes SPADE DRILL, pointe SM pour la fonte - Carburé K10
-  CUSPIDI SM-POINT - MD K10



- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.				
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10				
					TiN	TiCN	TiAlN		
Y Ø9.50 (.374) to Ø11.07 (.436)		9.50	.3740	2.4 (3/32)	SM655095	SM660095	SM665095		
	3/8	9.53	.3750		SM605024	SM610024	SM615024		
		9.80	.3858		SM655098	SM660098	SM665098		
	25/64	9.92	.3906		SM605025	SM610025	SM615025		
		10.00	.3937		SM655100	SM660100	SM665100		
		10.20	.4016		SM655102	SM660102	SM665102		
	13/32	10.32	.4062		SM605026	SM610026	SM615026		
		10.50	.4134		SM655105	SM660105	SM665105		
	27/64	10.72	.4219		SM605027	SM610027	SM615027		
		10.80	.4252		SM655108	SM660108	SM665108		
		11.00	.4331		SM655110	SM660110	SM665110		
	Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11		.4375	2.4 (3/32)	SM605028	SM610028	SM615028
		11.50	.4528	SM655115	SM660115		SM665115		
29/64		11.51	.4531	SM605029	SM610029		SM615029		
15/32		11.91	.4688	SM605030	SM610030		SM615030		
		12.00	.4724	SM655120	SM660120		SM665120		
31/64		12.30	.4844	SM605031	SM610031		SM615031		
		12.50	.4921	SM655125	SM660125		SM665125		
1/2		12.70	.5000	SM605032	SM610032		SM615032		
O Ø12.98 (.511) to Ø17.65 (.695)			13.00	.5118	3.2 (1/8)		SM655130	SM660130	SM665130
		33/64	13.10	.5156			SM605033	SM610033	SM615033
		17/32	13.49	.5312			SM605034	SM610034	SM615034
			13.50	.5315			SM655135	SM660135	SM665135
	35/64	13.89	.5469	SM605035		SM610035	SM615035		
		14.00	.5512	SM655140		SM660140	SM665140		
	9/16	14.29	.5625	SM605036		SM610036	SM615036		
		14.50	.5709	SM655145		SM660145	SM665145		
	37/64	14.68	.5781	SM605037		SM610037	SM615037		
		15.00	.5906	SM655150		SM660150	SM665150		
	19/32	15.08	.5938	SM605038		SM610038	SM615038		
	39/64	15.48	.6094	SM605039		SM610039	SM615039		
		15.50	.6102	SM655155		SM660155	SM665155		
	5/8	15.88	.6250	SM605040		SM610040	SM615040		
		16.00	.6299	SM655160		SM660160	SM665160		

◎ : Excellent ○ : Good

ISO	P										M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC																						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended															◎	◎	◎	◎	◎	◎		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC																						
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended																						

A338 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 SPADE DRILLS


SERIES **0, 1**

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

-  SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
-  Plaquettes SPADE DRILL, pointe SM pour la fonte - Carburé K10
-  CUSPIDI SM-POINT - MD K10



- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM605041	SM610041	SM615041
		16.50	.6496		SM655165	SM660165	SM665165
	21/32	16.67	.6562		SM605042	SM610042	SM615042
		17.00	.6693		SM655170	SM660170	SM665170
	43/64	17.07	.6719		SM605043	SM610043	SM615043
	11/16	17.46	.6875		SM605044	SM610044	SM615044
		17.50	.6890		SM655175	SM660175	SM665175
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	SM605045	SM610045	SM615045
		18.00	.7087		SM655180	SM660180	SM665180
	23/32	18.26	.7188		SM605046	SM610046	SM615046
		18.50	.7283		SM655185	SM660185	SM665185
	47/64	18.65	.7344		SM605047	SM610047	SM615047
		19.00	.7480		SM655190	SM660190	SM665190
	3/4	19.05	.7500		SM605048	SM610048	SM615048
	49/64	19.45	.7656		SM605049	SM610049	SM615049
		19.50	.7677		SM655195	SM660195	SM665195
	25/32	19.84	.7812		SM605050	SM610050	SM615050
		20.00	.7874		SM655200	SM660200	SM665200
	51/64	20.24	.7969		SM605051	SM610051	SM615051
		20.50	.8071		SM655205	SM660205	SM665205
	13/16	20.64	.8125		SM605052	SM610052	SM615052
		21.00	.8268		SM655210	SM660210	SM665210
	27/32	21.43	.8438		SM605054	SM610054	SM615054
	55/64	21.83	.8594		SM605055	SM610055	SM615055
		22.00	.8661		SM655220	SM660220	SM665220
	7/8	22.23	.8750		SM605056	SM610056	SM615056
	57/64	22.62	.8906		SM605057	SM610057	SM615057
		23.00	.9055		SM655230	SM660230	SM665230
	29/32	23.02	.9062		SM605058	SM610058	SM615058
	59/64	23.42	.9219		SM605059	SM610059	SM615059
	15/16	23.81	.9375		SM605060	SM610060	SM615060
	24.00	.9449	SM655240	SM660240	SM665240		

◎ : Excellent ○ : Good


ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HrC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	180	130	230	
Recommended															⊙	⊙	⊙	⊙	⊙	⊙	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze/ Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HrC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

 SPADE DRILLS

SERIES 2


SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL, pointe SM pour la fonte - Carbure K10
- CUSPIDI SM-POINT - MD K10



- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	CARBIDE K10		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM605062	SM610062	SM615062
	63/64	25.00	.9843		SM655250	SM660250	SM665250
	1	25.40	1.0000		SM605100	SM610100	SM615100
	1-1/64	25.80	1.0156		SM605101	SM610101	SM615101
		26.00	1.0236		SM655260	SM660260	SM665260
	1-1/32	26.19	1.0312		SM605102	SM610102	SM615102
	1-3/64	26.59	1.0469		SM605103	SM610103	SM615103
	1-1/16	26.99	1.0625		SM605104	SM610104	SM615104
		27.00	1.0630		SM655270	SM660270	SM665270
	1-3/32	27.78	1.0938		SM605106	SM610106	SM615106
		28.00	1.1024		SM655280	SM660280	SM665280
	1-7/64	28.18	1.1094		SM605107	SM610107	SM615107
	1-1/8	28.58	1.1250		SM605108	SM610108	SM615108
		29.00	1.1417		SM655290	SM660290	SM665290
	1-5/32	29.37	1.1562		SM605110	SM610110	SM615110
		30.00	1.1811		SM655300	SM660300	SM665300
	1-3/16	30.16	1.1875		SM605112	SM610112	SM615112
	1-7/32	30.96	1.2188		SM605114	SM610114	SM615114
		31.00	1.2205		SM655310	SM660310	SM665310
	1-1/4	31.75	1.2500		SM605116	SM610116	SM615116
		32.00	1.2598		SM655320	SM660320	SM665320
	1-9/32	32.54	1.2812		SM605118	SM610118	SM615118
		33.00	1.2992		SM655330	SM660330	SM665330
	1-5/16	33.34	1.3125		SM605120	SM610120	SM615120
		34.00	1.3386		SM655340	SM660340	SM665340
	1-11/32	34.13	1.3438		SM605122	SM610122	SM615122
	1-3/8	34.93	1.3750		SM605124	SM610124	SM615124
		35.00	1.3780		SM655350	SM660350	SM665350

◎ : Excellent ○ : Good

ISO	P										M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc																						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended															◎	◎	◎	◎	◎	◎		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended																						

A340 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions


YG-1 CO., LTD.

 SPADE DRILLS

SERIES Y, Z, 0

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20



cutting conditions : p.A378

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	CARBIDE K20		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	SM755095	SM760095	SM765095
		9.53	.3750		SM705024	SM710024	SM715024
		9.80	.3858		SM755098	SM760098	SM765098
		25/64	9.92		SM705025	SM710025	SM715025
		10.00	.3937		SM755100	SM760100	SM765100
	13/32	10.20	.4016		SM755102	SM760102	SM765102
		10.32	.4062		SM705026	SM710026	SM715026
		10.50	.4134		SM755105	SM760105	SM765105
		27/64	10.72		SM705027	SM710027	SM715027
		10.80	.4252		SM755108	SM760108	SM765108
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.00	.4331	2.4 (3/32)	SM755110	SM760110	SM765110
		11.11	.4375		SM705028	SM710028	SM715028
		11.50	.4528		SM755115	SM760115	SM765115
		29/64	11.51		SM705029	SM710029	SM715029
		15/32	11.91		SM705030	SM710030	SM715030
	31/64	12.00	.4724		SM755120	SM760120	SM765120
		12.30	.4844		SM705031	SM710031	SM715031
		12.50	.4921		SM755125	SM760125	SM765125
		1/2	12.70		SM705032	SM710032	SM715032
		13.00	.5118		SM755130	SM760130	SM765130
0 Ø12.98 (.511) to Ø17.65 (.695)	33/64	13.10	.5156	3.2 (1/8)	SM705033	SM710033	SM715033
		17/32	13.49		SM705034	SM710034	SM715034
		13.50	.5315		SM755135	SM760135	SM765135
		35/64	13.89		SM705035	SM710035	SM715035
		14.00	.5512		SM755140	SM760140	SM765140
	9/16	14.29	.5625		SM705036	SM710036	SM715036
		14.50	.5709		SM755145	SM760145	SM765145
		37/64	14.68		SM705037	SM710037	SM715037
		15.00	.5906		SM755150	SM760150	SM765150
		19/32	15.08		SM705038	SM710038	SM715038
	39/64	15.48	.6094		SM705039	SM710039	SM715039
		15.50	.6102		SM755155	SM760155	SM765155
		5/8	15.88		SM705040	SM710040	SM715040
		16.00	.6299		SM755160	SM760160	SM765160

◎ : Excellent ○ : Good


ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○		○	○	○	○	○	◎	◎	◎	◎	○	○	○	○	○	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○			

 SPADE DRILLS


SERIES 0, 1

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20



- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM705041	SM710041	SM715041
		16.50	.6496		SM755165	SM760165	SM765165
	21/32	16.67	.6562		SM705042	SM710042	SM715042
		17.00	.6693		SM755170	SM760170	SM765170
	43/64	17.07	.6719		SM705043	SM710043	SM715043
	11/16	17.46	.6875		SM705044	SM710044	SM715044
		17.50	.6890		SM755175	SM760175	SM765175
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	SM705045	SM710045	SM715045
		18.00	.7087		SM755180	SM760180	SM765180
	23/32	18.26	.7188		SM705046	SM710046	SM715046
		18.50	.7283		SM755185	SM760185	SM765185
	47/64	18.65	.7344		SM705047	SM710047	SM715047
		19.00	.7480		SM755190	SM760190	SM765190
	3/4	19.05	.7500		SM705048	SM710048	SM715048
	49/64	19.45	.7656		SM705049	SM710049	SM715049
		19.50	.7677		SM755195	SM760195	SM765195
	25/32	19.84	.7812		SM705050	SM710050	SM715050
		20.00	.7874		SM755200	SM760200	SM765200
	51/64	20.24	.7969		SM705051	SM710051	SM715051
		20.50	.8071		SM755205	SM760205	SM765205
	13/16	20.64	.8125		SM705052	SM710052	SM715052
		21.00	.8268		SM755210	SM760210	SM765210
	27/32	21.43	.8438		SM705054	SM710054	SM715054
	55/64	21.83	.8594		SM705055	SM710055	SM715055
		22.00	.8661		SM755220	SM760220	SM765220
	7/8	22.23	.8750		SM705056	SM710056	SM715056
	57/64	22.62	.8906		SM705057	SM710057	SM715057
		23.00	.9055		SM755230	SM760230	SM765230
	29/32	23.02	.9062		SM705058	SM710058	SM715058
	59/64	23.42	.9219		SM705059	SM710059	SM715059
	15/16	23.81	.9375		SM705060	SM710060	SM715060
		24.00	.9449		SM755240	SM760240	SM765240

◎ : Excellent ○ : Good

ISO	P											M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		20			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○	○	○	○		○	○	○	○	○	◎	◎	◎		○	○	○	○	○	○			
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○					

A342 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions


YG YG-1 CO., LTD.

 SPADE DRILLS


SERIES 2

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20



- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM705062	SM710062	SM715062
	63/64	25.00	.9843		SM755250	SM760250	SM765250
	1	25.40	1.0000		SM705100	SM710100	SM715100
	1-1/64	25.80	1.0156		SM705101	SM710101	SM715101
		26.00	1.0236		SM755260	SM760260	SM765260
	1-1/32	26.19	1.0312		SM705102	SM710102	SM715102
	1-3/64	26.59	1.0469		SM705103	SM710103	SM715103
	1-1/16	26.99	1.0625		SM705104	SM710104	SM715104
		27.00	1.0630		SM755270	SM760270	SM765270
	1-3/32	27.78	1.0938		SM705106	SM710106	SM715106
		28.00	1.1024		SM755280	SM760280	SM765280
	1-7/64	28.18	1.1094		SM705107	SM710107	SM715107
	1-1/8	28.58	1.1250		SM705108	SM710108	SM715108
		29.00	1.1417		SM755290	SM760290	SM765290
	1-5/32	29.37	1.1562		SM705110	SM710110	SM715110
		30.00	1.1811		SM755300	SM760300	SM765300
	1-3/16	30.16	1.1875		SM705112	SM710112	SM715112
	1-7/32	30.96	1.2188		SM705114	SM710114	SM715114
		31.00	1.2205		SM755310	SM760310	SM765310
	1-1/4	31.75	1.2500		SM705116	SM710116	SM715116
		32.00	1.2598		SM755320	SM760320	SM765320
	1-9/32	32.54	1.2812		SM705118	SM710118	SM715118
		33.00	1.2992		SM755330	SM760330	SM765330
	1-5/16	33.34	1.3125		SM705120	SM710120	SM715120
		34.00	1.3386		SM755340	SM760340	SM765340
	1-11/32	34.13	1.3438		SM705122	SM710122	SM715122
	1-3/8	34.93	1.3750		SM705124	SM710124	SM715124
		35.00	1.3780		SM755350	SM760350	SM765350

◎ : Excellent ○ : Good

ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○		○		○	○	○	○	○	◎	◎	◎		○	○	○	○	○	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○			

YG SPADE DRILLS


SERIES 3

SM-POINT SPADE DRILL INSERTS - CARBIDE K20


- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20



- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	6.4 (1/4)	SM705126	SM710126	SM715126
		36.00	1.4173		SM755360	SM760360	SM765360
	1-7/16	36.51	1.4375		SM705128	SM710128	SM715128
		37.00	1.4567		SM755370	SM760370	SM765370
	1-15/32	37.31	1.4688		SM705130	SM710130	SM715130
		38.00	1.4961		SM755380	SM760380	SM765380
	1-1/2	38.10	1.5000		SM705132	SM710132	SM715132
	1-17/32	38.89	1.5312		SM705134	SM710134	SM715134
		39.00	1.5354		SM755390	SM760390	SM765390
	1-9/16	39.69	1.5625		SM705136	SM710136	SM715136
		40.00	1.5748		SM755400	SM760400	SM765400
	1-19/32	40.48	1.5938		SM705138	SM710138	SM715138
		41.00	1.6142		SM755410	SM760410	SM765410
	1-5/8	41.28	1.6250		SM705140	SM710140	SM715140
		42.00	1.6535		SM755420	SM760420	SM765420
	1-21/32	42.07	1.6562		SM705142	SM710142	SM715142
	1-11/16	42.86	1.6875		SM705144	SM710144	SM715144
		43.00	1.6929		SM755430	SM760430	SM765430
	1-23/32	43.66	1.7188		SM705146	SM710146	SM715146
		44.00	1.7323		SM755440	SM760440	SM765440
	1-3/4	44.45	1.7500		SM705148	SM710148	SM715148
		45.00	1.7717		SM755450	SM760450	SM765450
	1-25/32	45.24	1.7812		SM705150	SM710150	SM715150
		46.00	1.8110		SM755460	SM760460	SM765460
	1-13/16	46.04	1.8125		SM705152	SM710152	SM715152
	1-27/32	46.83	1.8438		SM705154	SM710154	SM715154
		47.00	1.8504		SM755470	SM760470	SM765470
	1-7/8	47.63	1.8750		SM705156	SM710156	SM715156

ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○		○		○	○	○	○	○	○	○	⊗	⊗	⊗	○	○	○	○	○	○			
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	⊗	⊗					⊗				⊗	⊗	⊗	⊗	⊗			○					

A344 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions YG-1 CO., LTD.

YG SPADE DRILLS


SERIES Y, Z, O

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40



- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A380



Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)		9.50	.3740	2.4 (3/32)	SM855095	SM860095	SM865095
	3/8	9.53	.3750		SM805024	SM810024	SM815024
		9.80	.3858		SM855098	SM860098	SM865098
	25/64	9.92	.3906		SM805025	SM810025	SM815025
		10.00	.3937		SM855100	SM860100	SM865100
		10.20	.4016		SM855102	SM860102	SM865102
	13/32	10.32	.4062		SM805026	SM810026	SM815026
		10.50	.4134		SM855105	SM860105	SM865105
	27/64	10.72	.4219		SM805027	SM810027	SM815027
		10.80	.4252		SM855108	SM860108	SM865108
Z Ø11.11(.437) to Ø12.95(.510)		11.00	.4331	2.4 (3/32)	SM855110	SM860110	SM865110
	7/16	11.11	.4375		SM805028	SM810028	SM815028
		11.50	.4528		SM855115	SM860115	SM865115
	29/64	11.51	.4531		SM805029	SM810029	SM815029
	15/32	11.91	.4688		SM805030	SM810030	SM815030
		12.00	.4724		SM855120	SM860120	SM865120
	31/64	12.30	.4844		SM805031	SM810031	SM815031
		12.50	.4921		SM855125	SM860125	SM865125
	1/2	12.70	.5000		SM805032	SM810032	SM815032
	O Ø12.98 (.511) to Ø17.65 (.695)		13.00		.5118	3.2 (1/8)	SM855130
33/64		13.10	.5156	SM805033	SM810033		SM815033
17/32		13.49	.5312	SM805034	SM810034		SM815034
		13.50	.5315	SM855135	SM860135		SM865135
35/64		13.89	.5469	SM805035	SM810035		SM815035
		14.00	.5512	SM855140	SM860140		SM865140
9/16		14.29	.5625	SM805036	SM810036		SM815036
		14.50	.5709	SM855145	SM860145		SM865145
37/64		14.68	.5781	SM805037	SM810037		SM815037
		15.00	.5906	SM855150	SM860150		SM865150
19/32		15.08	.5938	SM805038	SM810038		SM815038
39/64		15.48	.6094	SM805039	SM810039		SM815039
		15.50	.6102	SM855155	SM860155		SM865155
5/8		15.88	.6250	SM805040	SM810040		SM815040
		16.00	.6299	SM855160	SM860160		SM865160

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC																				
HB	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	20
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
ISO	N										S						H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC																				
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended	⊙	⊙									⊙	⊙	⊙	⊙	⊙			⊙		


YG-1 CO., LTD. phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions A345

 SPADE DRILLS


SERIES 0, 1

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40



- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A380

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.			
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40			
					TiN	TiCN	TiAlN	
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM805041	SM810041	SM815041	
		16.50	.6496		SM855165	SM860165	SM865165	
	21/32	16.67	.6562		SM805042	SM810042	SM815042	
		17.00	.6693		SM855170	SM860170	SM865170	
	43/64	17.07	.6719		SM805043	SM810043	SM815043	
	11/16	17.46	.6875		SM805044	SM810044	SM815044	
		17.50	.6890		SM855175	SM860175	SM865175	
						SM805045	SM810045	SM815045
1 Ø17.53 (.690) to Ø24.38 (.960)		18.00	.7087	4.0 (5/32)	SM855180	SM860180	SM865180	
	23/32	18.26	.7188		SM805046	SM810046	SM815046	
		18.50	.7283		SM855185	SM860185	SM865185	
	47/64	18.65	.7344		SM805047	SM810047	SM815047	
		19.00	.7480		SM855190	SM860190	SM865190	
	3/4	19.05	.7500		SM805048	SM810048	SM815048	
	49/64	19.45	.7656		SM805049	SM810049	SM815049	
		19.50	.7677		SM855195	SM860195	SM865195	
	25/32	19.84	.7812		SM805050	SM810050	SM815050	
		20.00	.7874		SM855200	SM860200	SM865200	
	51/64	20.24	.7969		SM805051	SM810051	SM815051	
		20.50	.8071		SM855205	SM860205	SM865205	
	13/16	20.64	.8125		SM805052	SM810052	SM815052	
		21.00	.8268		SM855210	SM860210	SM865210	
	27/32	21.43	.8438		SM805054	SM810054	SM815054	
	55/64	21.83	.8594		SM805055	SM810055	SM815055	
		22.00	.8661		SM855220	SM860220	SM865220	
	7/8	22.23	.8750		SM805056	SM810056	SM815056	
	57/64	22.62	.8906		SM805057	SM810057	SM815057	
		23.00	.9055		SM855230	SM860230	SM865230	
	29/32	23.02	.9062		SM805058	SM810058	SM815058	
	59/64	23.42	.9219		SM805059	SM810059	SM815059	
	15/16	23.81	.9375		SM805060	SM810060	SM815060	
			24.00		.9449	SM855240	SM860240	SM865240

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○						○			○	○	○	○	○			◎			

A346 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions


YG-1 CO., LTD.

 SPADE DRILLS


SERIES 2

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40



- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.
- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A380

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM805062	SM810062	SM815062
	63/64	25.00	.9843		SM855250	SM860250	SM865250
	1	25.40	1.0000		SM805100	SM810100	SM815100
	1-1/64	25.80	1.0156		SM805101	SM810101	SM815101
		26.00	1.0236		SM855260	SM860260	SM865260
	1-1/32	26.19	1.0312		SM805102	SM810102	SM815102
	1-3/64	26.59	1.0469		SM805103	SM810103	SM815103
	1-1/16	26.99	1.0625		SM805104	SM810104	SM815104
		27.00	1.0630		SM855270	SM860270	SM865270
	1-3/32	27.78	1.0938		SM805106	SM810106	SM815106
		28.00	1.1024		SM855280	SM860280	SM865280
	1-7/64	28.18	1.1094		SM805107	SM810107	SM815107
	1-1/8	28.58	1.1250		SM805108	SM810108	SM815108
		29.00	1.1417		SM855290	SM860290	SM865290
	1-5/32	29.37	1.1562		SM805110	SM810110	SM815110
		30.00	1.1811		SM855300	SM860300	SM865300
	1-3/16	30.16	1.1875		SM805112	SM810112	SM815112
	1-7/32	30.96	1.2188		SM805114	SM810114	SM815114
		31.00	1.2205		SM855310	SM860310	SM865310
	1-1/4	31.75	1.2500		SM805116	SM810116	SM815116
		32.00	1.2598		SM855320	SM860320	SM865320
	1-9/32	32.54	1.2812		SM805118	SM810118	SM815118
		33.00	1.2992		SM855330	SM860330	SM865330
	1-5/16	33.34	1.3125		SM805120	SM810120	SM815120
		34.00	1.3386		SM855340	SM860340	SM865340
	1-11/32	34.13	1.3438		SM805122	SM810122	SM815122
	1-3/8	34.93	1.3750		SM805124	SM810124	SM815124
		35.00	1.3780		SM855350	SM860350	SM865350

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		20	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○					○				○	○	○	○	○			◎			

YG SPADE DRILLS

SERIES 3


SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40




- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnideingeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A380



Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	CARBIDE P40		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	6.4 (1/4)	SM805126	SM810126	SM815126
		36.00	1.4173		SM855360	SM860360	SM865360
	1-7/16	36.51	1.4375		SM805128	SM810128	SM815128
		37.00	1.4567		SM855370	SM860370	SM865370
	1-15/32	37.31	1.4688		SM805130	SM810130	SM815130
		38.00	1.4961		SM855380	SM860380	SM865380
	1-1/2	38.10	1.5000		SM805132	SM810132	SM815132
	1-17/32	38.89	1.5312		SM805134	SM810134	SM815134
		39.00	1.5354		SM855390	SM860390	SM865390
	1-9/16	39.69	1.5625		SM805136	SM810136	SM815136
		40.00	1.5748		SM855400	SM860400	SM865400
	1-19/32	40.48	1.5938		SM805138	SM810138	SM815138
		41.00	1.6142		SM855410	SM860410	SM865410
	1-5/8	41.28	1.6250		SM805140	SM810140	SM815140
		42.00	1.6535		SM855420	SM860420	SM865420
	1-21/32	42.07	1.6562		SM805142	SM810142	SM815142
	1-11/16	42.86	1.6875		SM805144	SM810144	SM815144
		43.00	1.6929		SM855430	SM860430	SM865430
	1-23/32	43.66	1.7188		SM805146	SM810146	SM815146
		44.00	1.7323		SM855440	SM860440	SM865440
	1-3/4	44.45	1.7500		SM805148	SM810148	SM815148
		45.00	1.7717		SM855450	SM860450	SM865450
	1-25/32	45.24	1.7812		SM805150	SM810150	SM815150
		46.00	1.8110		SM855460	SM860460	SM865460
	1-13/16	46.04	1.8125		SM805152	SM810152	SM815152
	1-27/32	46.83	1.8438		SM805154	SM810154	SM815154
		47.00	1.8504		SM855470	SM860470	SM865470
	1-7/8	47.63	1.8750		SM805156	SM810156	SM815156

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130
Recommended	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○
ISO	N										S						H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC											15	30	25	38	34			55	60	42
HB		60	100	75	90	130	110	90	100		200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended	○	○					○				○	○	○	○	○			◎		

A348 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions


YG YG-1 CO., LTD.

YG SPADE DRILLS


SERIES Y, Z, O

SPADE DRILL INSERTS - SUPER COBALT T15 FLAT BOTTOM

- SPADE DRILL BOHRER-EINSÄTZE - SUPER COBALT T15 (FLACH-NUT)
- Plaquettes SPADE DRILL à fond plat - Super Cobalt T15
- INSERTI SPADE DRILL - SUPER HSS T15 FONDO PIATTO



cutting conditions : p.A379



Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	SUPER HSS T15		
					TiN	Hardlick	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	S2155095	S2170095	S2165095
		9.53	.3750		S2105024	S2120024	S2115024
	25/64	9.80	.3858		S2155098	S2170098	S2165098
		9.92	.3906		S2105025	S2120025	S2115025
	13/32	10.00	.3937		S2155100	S2170100	S2165100
		10.20	.4016		S2155102	S2170102	S2165102
	27/64	10.32	.4062		S2105026	S2120026	S2115026
		10.50	.4134		S2155105	S2170105	S2165105
	1/2	10.72	.4219		S2105027	S2120027	S2115027
		10.80	.4252		S2155108	S2170108	S2165108
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.00	.4331	2.4 (3/32)	S2155110	S2170110	S2165110
		11.11	.4375		S2105028	S2120028	S2115028
	29/64	11.50	.4528		S2155115	S2170115	S2165115
		11.51	.4531		S2105029	S2120029	S2115029
	15/32	11.91	.4688		S2105030	S2120030	S2115030
		12.00	.4724		S2155120	S2170120	S2165120
	31/64	12.30	.4844		S2105031	S2120031	S2115031
		12.50	.4921		S2155125	S2170125	S2165125
	1/2	12.70	.5000		S2105032	S2120032	S2115032
		13.00	.5118		S2155130	S2170130	S2165130
O Ø12.98 (.511) to Ø17.65 (.695)	33/64	13.10	.5156	3.2 (1/8)	S2105033	S2120033	S2115033
		13.49	.5312		S2105034	S2120034	S2115034
	17/32	13.50	.5315		S2155135	S2170135	S2165135
		13.89	.5469		S2105035	S2120035	S2115035
	35/64	14.00	.5512		S2155140	S2170140	S2165140
		14.29	.5625		S2105036	S2120036	S2115036
	9/16	14.50	.5709		S2155145	S2170145	S2165145
		14.68	.5781		S2105037	S2120037	S2115037
	37/64	15.00	.5906		S2155150	S2170150	S2165150
		15.08	.5938		S2105038	S2120038	S2115038
	19/32	15.48	.6094		S2105039	S2120039	S2115039
		15.50	.6102		S2155155	S2170155	S2165155
	5/8	15.88	.6250		S2105040	S2120040	S2115040
		16.00	.6299		S2155160	S2170160	S2165160

◎ : Excellent ○ : Good

ISO	P										M			K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎		◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○						○			◎	○	○	○	○			○				

YG YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

A349

SPADE DRILLS

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40



- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnideingeometrie

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES


TECHNICAL
DATA



Z**SDSMT SERIES

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

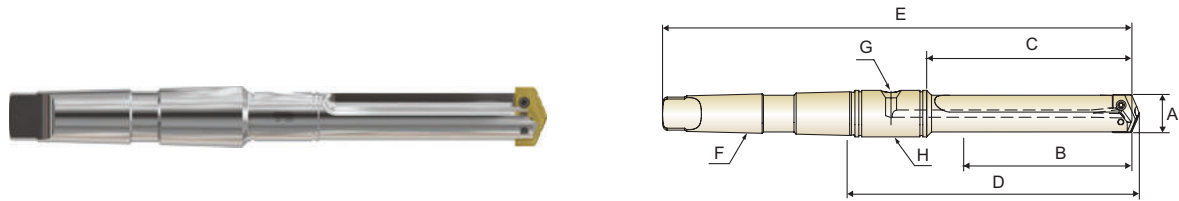

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0SDSMT02I	3/8 ~ 27/64	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
Z	ZZ0SDSMT02I	7/16 ~ 1/2	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
0	Z00SDSMT02I	33/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
0.5	Z05SDSMT02I	39/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
1	Z10SDSMT03I	45/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z10SDSMT04I	45/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
1.5	Z15SDSMT03I	55/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z15SDSMT04I	55/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
2	Z20SDSMT03I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z20SDSMT04I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	PR110100
2.5	Z25SDSMT03I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z25SDSMT04I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/4	PR110116
3	Z30SDSMT04I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	11-5/8	16-1/16	#4	1/4	PR110116
	Z30SDSMT05I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	11-5/8	17-5/16	#5	1/4	PR110148
4	Z40SDSMT04I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	12-5/8	17-1/16	#4	1/4	PR110116
	Z40SDSMT05I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	12-5/8	18-5/16	#5	1/4	PR110148
5~6	Z50SDSMT05I	2-1/2 ~ 3-1/2	10-3/4	12-1/2	15-5/16	20-15/16	#5	1/2	PR110216
7~8	Z70SDSMT05I	3-17/32 ~ 4-1/2	10-3/4	12-7/8	15-11/16	21-5/16	#5	1/2	PR110216


► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)



Z**SDHMT SERIES

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

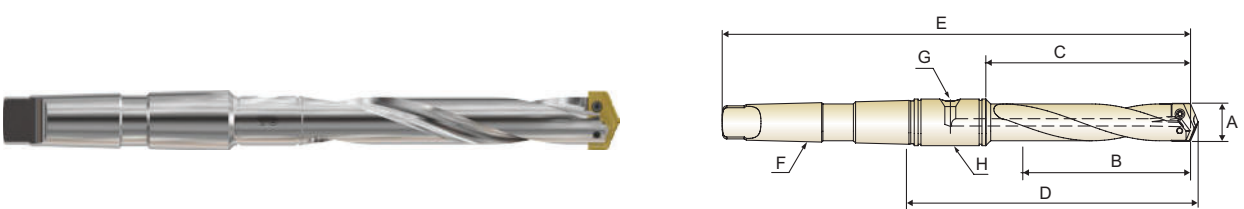

STANDARD LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0SDHMT02I	3/8 ~ 27/64	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
Z	ZZ0SDHMT02I	7/16 ~ 1/2	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
0	Z00SDHMT02I	33/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
0.5	Z05SDHMT02I	39/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
1	Z10SDHMT03I	45/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z10SDHMT04I	45/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
1.5	Z15SDHMT03I	55/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z15SDHMT04I	55/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
2	Z20SDHMT03I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z20SDHMT04I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	PR110100
2.5	Z25SDHMT03I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z25SDHMT04I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/4	PR110116

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS


COUNTER
BORES

TECHNICAL
DATA



TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

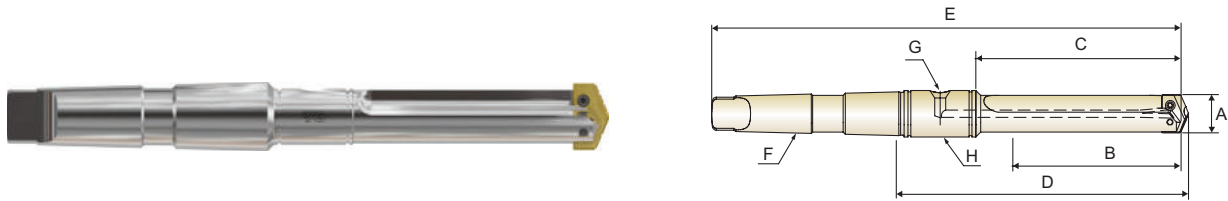

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXSMT02I	3/8 ~ 27/64	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
Z	ZZ0EXSMT02I	7/16 ~ 1/2	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
0	Z00EXSMT02I	33/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
0.5	Z05EXSMT02I	39/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
1	Z10EXSMT03I	45/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
1.5	Z15EXSMT03I	55/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
2	Z20EXSMT04I	31/32 ~ 1-3/8	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	PR110100
2.5	Z25EXSMT04I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	PR110116
3	Z30EXSMT04I	1-13/32 ~ 1-7/8	13-3/4	15	17-1/8	21-9/16	#4	1/4	PR110116
4	Z40EXSMT05I	1-29/32 ~ 2-9/16	16-5/8	18	20-1/8	25-13/16	#5	1/4	PR110148
5~6	Z50EXSMT05I	2-1/2 ~ 3-1/2	18-1/4	20	22-13/16	28-7/16	#5	1/2	PR110216
7~8	Z70EXSMT05I	3-17/32 ~ 4-1/2	21-7/8	24	26-13/16	32-7/16	#5	1/2	PR110216

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

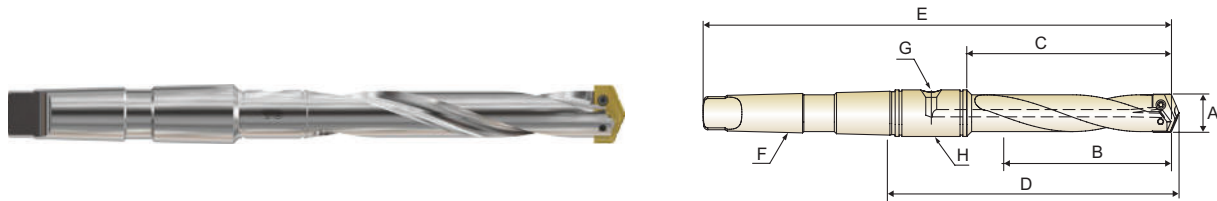

EXTENDED LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXHMT02I	3/8 ~ 27/64	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
Z	ZZ0EXHMT02I	7/16 ~ 1/2	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
0	Z00EXHMT02I	33/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
0.5	Z05EXHMT02I	39/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
1	Z10EXHMT03I	45/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
1.5	Z15EXHMT03I	55/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
2	Z20EXHMT04I	31/32 ~ 1-3/8	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	PR110100
2.5	Z25EXHMT04I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	PR110116

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)



TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM



LONG LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
0	Z00LGHMT02I	33/64 ~ 11/16	7	7-13/16	9-17/64	12-3/32	#2	1/16	PR110048
0.5	Z05LGHMT02I	39/64 ~ 11/16	7	7-13/16	9-17/64	12-3/32	#2	1/16	PR110048

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS


COUNTER
BORES

TECHNICAL
DATA



TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

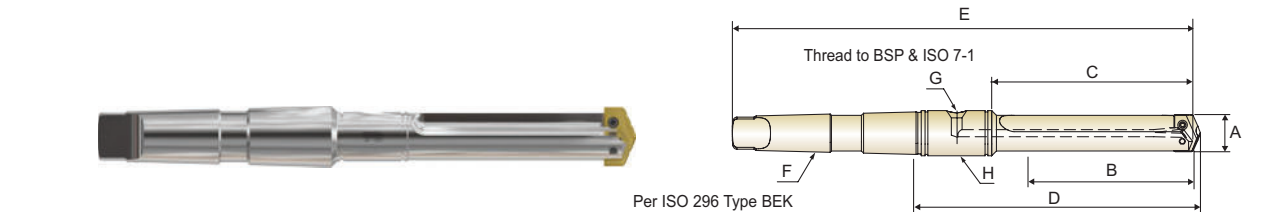

SHORT LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0STSMT02M	9.5 ~ 11.0	31.8	51.5	88.0	160.3	#2	1/16	PR120190
Z	ZZ0STSMT02M	11.5 ~ 12.5	31.8	51.5	88.0	160.3	#2	1/16	PR120190
0	Z00STSMT02M	13.0 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
0.5	Z05STSMT02M	15.5 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
1	Z10STSMT03M	18.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
1.5	Z15STSMT03M	22.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
2	Z20STSMT04M	25.0 ~ 35.0	85.7	114.3	160.4	273.8	#4	1/8	PR120254
2.5	Z25STSMT04M	30.0 ~ 35.0	85.7	114.3	167.6	281.0	#4	1/4	PR120317
3	Z30STSMT04M	36.0 ~ 47.0	120.6	152.4	206.4	319.1	#4	1/4	PR120317
4	Z40STSMT05M	48.0 ~ 65.0	130.1	165.1	219.1	363.5	#5	1/4	PR120444
5~6	Z50STSMT05M	64.0 ~ 88.0	171.5	215.9	287.3	430.2	#5	1/2	PR120571
7~8	Z70STSMT05M	90.0 ~ 114.0	171.5	225.4	296.8	439.7	#5	1/2	PR120571

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)



INTERMEDIATE LENGTH - Helical Flute (Metric)


Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
1	Z10ITHMT03M	18.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
1.5	Z15ITHMT03M	22.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
2	Z20ITHMT04M	25.0 ~ 35.0	136.5	165.1	211.2	324.6	#4	1/8	PR120254
2.5	Z25ITHMT04M	30.0 ~ 35.0	136.5	165.1	218.4	331.8	#4	1/4	PR120317
3	Z30ITHMT04M	36.0 ~ 47.0	165.1	196.9	250.9	363.6	#4	1/4	PR120317

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)



TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

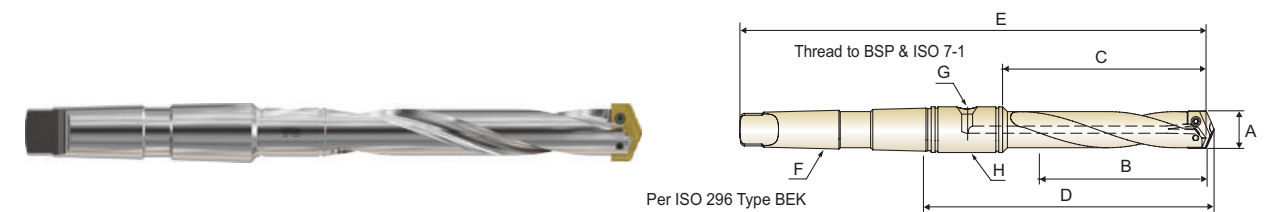

STANDARD LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0SDHMT02M	9.5 ~ 11.0	60.3	80.2	116.7	188.9	#2	1/16	PR120190
Z	ZZ0SDHMT02M	11.5 ~ 12.5	60.3	80.2	116.7	188.9	#2	1/16	PR120190
0	Z00SDHMT02M	13.0 ~ 17.5	63.5	84.1	121.0	192.9	#2	1/16	PR120190
0.5	Z05SDHMT02M	15.5 ~ 17.5	63.5	84.1	121.0	192.9	#2	1/16	PR120190
1	Z10SDHMT03M	18.0 ~ 24.0	171.5	200.0	244.1	334.2	#3	1/8	PR120254
1.5	Z15SDHMT03M	22.0 ~ 24.0	171.5	200.0	244.1	334.2	#3	1/8	PR120254
2	Z20SDHMT04M	25.0 ~ 35.0	187.3	215.9	262.0	375.4	#4	1/8	PR120254
2.5	Z25SDHMT04M	30.0 ~ 35.0	187.3	215.9	269.2	382.6	#4	1/4	PR120317
3	Z30SDHMT04M	36.0 ~ 47.0	209.5	241.3	295.3	408.0	#4	1/4	PR120317
4	Z40SDHMT05M	48.0 ~ 65.0	231.8	266.7	320.7	465.1	#5	1/4	PR120444
5~6	Z50SDHMT05M	64.0 ~ 88.0	273.1	317.5	388.9	531.8	#5	1/2	PR120571
7~8	Z70SDHMT05M	90.0 ~ 114.0	273.1	327.0	398.5	541.3	#5	1/2	PR120571

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA




Z**EXHMT SERIES

Z**EXSMT SERIES

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

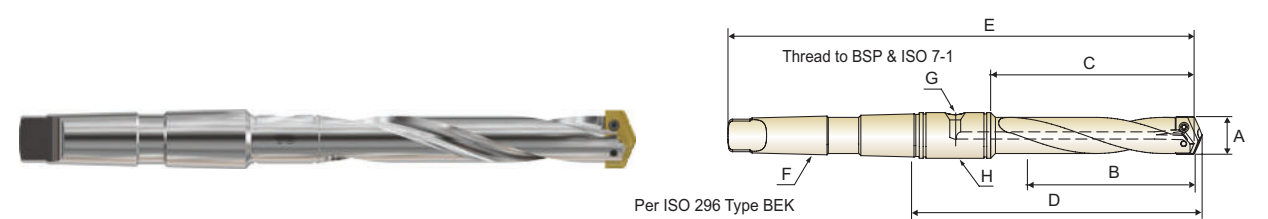

EXTENDED LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXHMT02M	9.5 ~ 11.0	111.1	130.9	167.4	239.7	#2	1/16	PR120190
Z	ZZ0EXHMT02M	11.5 ~ 12.5	111.1	130.9	167.4	239.7	#2	1/16	PR120190
0	Z00EXHMT02M	13.0 ~ 17.5	114.3	135.0	171.8	243.7	#2	1/16	PR120190
0.5	Z05EXHMT02M	15.5 ~ 17.5	114.3	135.0	171.8	243.7	#2	1/16	PR120190
1	Z10EXHMT03M	18.0 ~ 24.0	273.1	301.6	345.7	435.8	#3	1/8	PR120254
1.5	Z15EXHMT03M	22.0 ~ 24.0	273.1	301.6	345.7	435.8	#3	1/8	PR120254
2	Z20EXHMT04M	25.0 ~ 35.0	289.0	317.5	363.6	477.0	#4	1/8	PR120254
2.5	Z25EXHMT04M	30.0 ~ 35.0	289.0	317.5	370.8	484.2	#4	1/4	PR120317

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

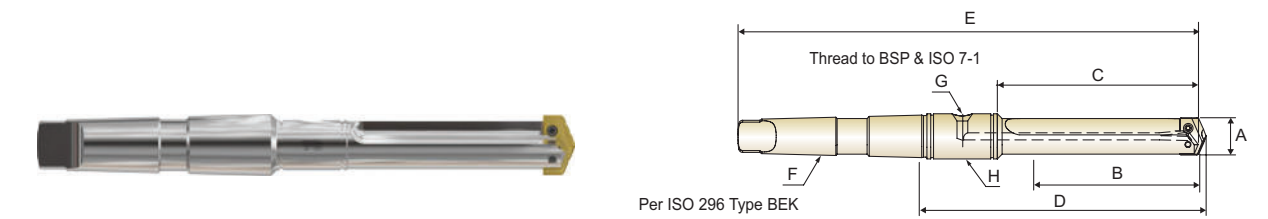

EXTENDED LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
3	Z30EXSMT04M	36.0 ~ 47.0	349.3	381.0	435.0	547.7	#4	1/4	PR120317
4	Z40EXSMT05M	48.0 ~ 65.0	422.3	457.2	511.2	655.6	#5	1/4	PR120444
5~6	Z50EXSMT05M	64.0 ~ 88.0	463.6	508.0	579.4	722.3	#5	1/2	PR120571
7~8	Z70EXSMT05M	90.0 ~ 114.0	555.6	609.6	681.1	823.9	#5	1/2	PR120571


► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)



Z**LGHMT SERIES

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

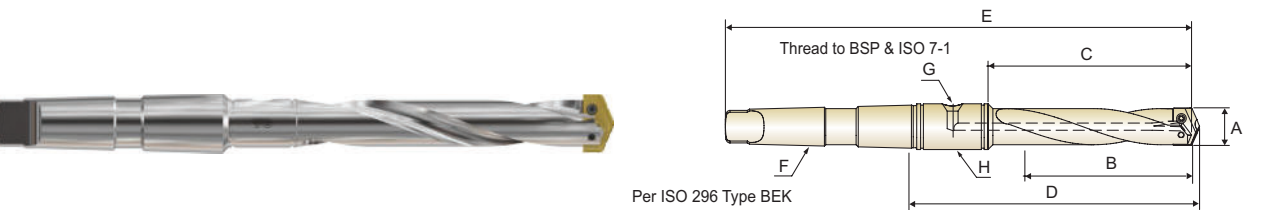

LONG LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
0	Z00LGHMT02M	13.0 ~ 17.5	177.8	198.5	235.3	307.2	#2	1/16	PR120190
0.5	Z05LGHMT02M	15.5 ~ 17.5	177.8	198.5	235.3	307.2	#2	1/16	PR120190

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA



Z**SBSF SERIES


Z**STSF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

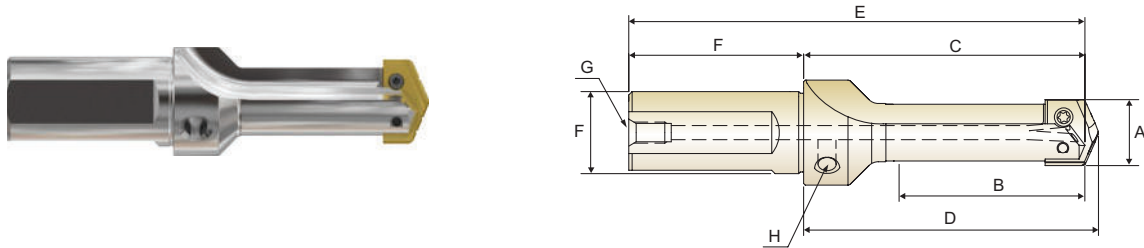

STUB LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap	
		A	B	C	D	E	Dia.	Length	Rear	Side
Y	ZY0SBSF063I	3/8 ~ 27/64	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	1/8
Z	ZZ0SBSF063I	7/16 ~ 1/2	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	1/8
0	Z00SBSF075I	33/64 ~ 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	1/8
0.5	Z05SBSF075I	39/64 ~ 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	1/8
1	Z10SBSF100I	45/64 ~ 15/16	1-7/8	2-63/64	3-1/8	5-17/64	1	2-9/32	1/8	1/8
1.5	Z15SBSF100I	55/64 ~ 15/16	2-1/4	3-31/64	3-5/8	5-49/64	1	2-9/32	1/8	1/8
2	Z20SBSF125I	31/32 ~ 1-3/8	2-1/4	3-31/64	3-5/8	5-49/64	1-1/4	2-9/32	1/4	1/8
2.5	Z25SBSF125I	1-3/16 ~ 1-3/8	3-5/8	4-55/64	5	7-9/64	1-1/4	2-9/32	1/4	1/8
3	Z30SBSF150I	1-13/32 ~ 1-7/8	3	4-59/64	5-7/64	7-39/64	1-1/2	2-11/16	1/4	1/4

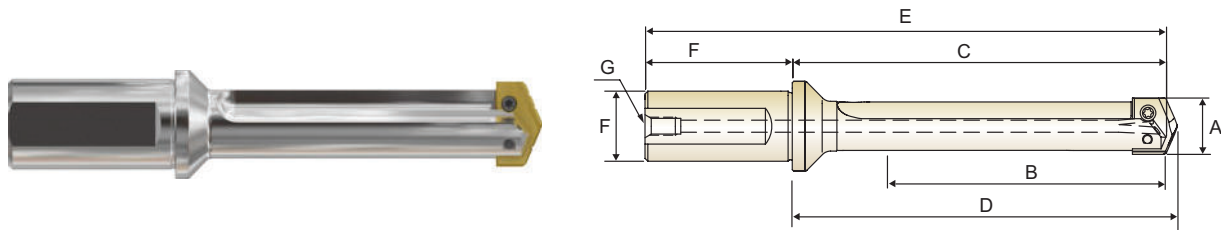

SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	G
Y	ZY0STSF075I	3/8 ~ 27/64	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8
Z	ZZ0STSF075I	7/16 ~ 1/2	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8
0	Z00STSF075I	33/64 ~ 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8
0.5	Z05STSF075I	39/64 ~ 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8
1	Z10STSF100I	45/64 ~ 15/16	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8
1.5	Z15STSF100I	55/64 ~ 15/16	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8
2	Z20STSF125I	31/32 ~ 1-3/8	3-3/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4
2.5	Z25STSF125I	1-3/16 ~ 1-3/8	3-3/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4
3	Z30STSF150I	1-13/32 ~ 1-7/8	4-3/4	6-13/16	7	9-1/2	1-1/2	2-11/16	1/4
4	Z40STSF150I	1-29/32 ~ 2-9/16	5-1/8	7-1/16	7-1/4	9-3/4	1-1/2	2-11/16	1/4



Z**ITSF SERIES


Z**ITHF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

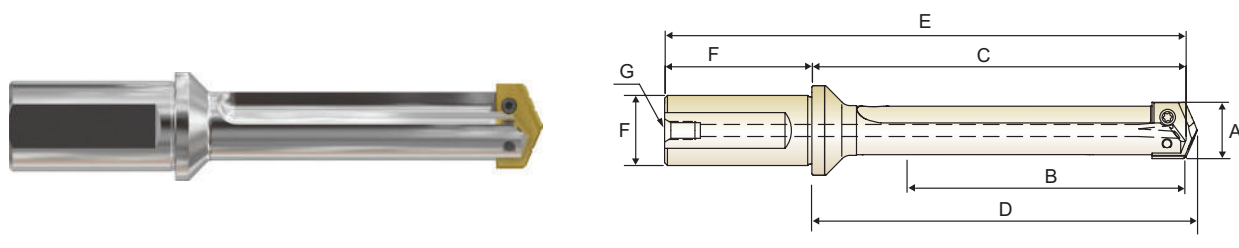

INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	G
1	Z10ITSF100I	45/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
1.5	Z15ITSF100I	55/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
2	Z20ITSF125I	31/32 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
2.5	Z25ITSF125I	1-3/16 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
3	Z30ITSF150I	1-13/32 ~ 1-7/8	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4

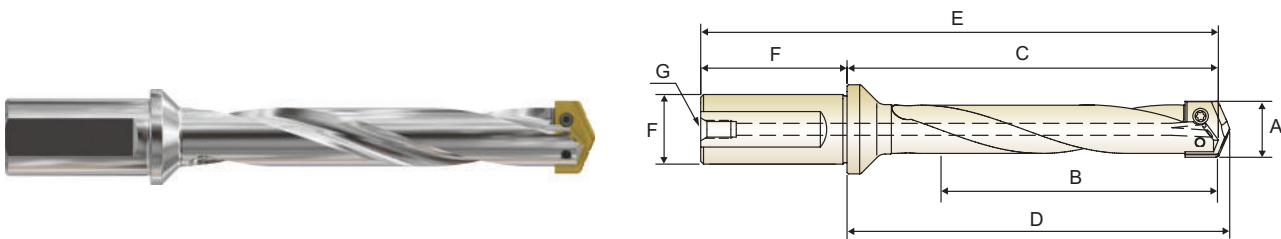

INTERMEDIATE LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	G
1	Z10ITHF100I	45/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
1.5	Z15ITHF100I	55/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
2	Z20ITHF125I	31/32 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
2.5	Z25ITHF125I	1-3/16 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
3	Z30ITHF150I	1-13/32 ~ 1-7/8	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA



Z**SDSF SERIES


Z**SDHF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

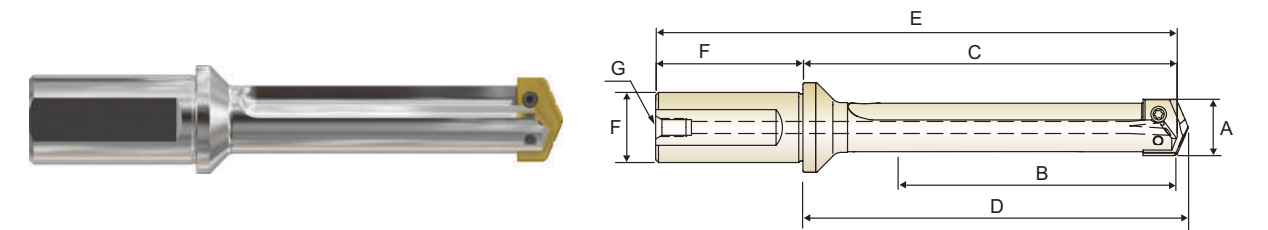

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
							F		
Y	ZY0SDSF075I	3/8 ~ 27/64	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
Z	ZZ0SDSF075I	7/16 ~ 1/2	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
0	Z00SDSF075I	33/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
0.5	Z05SDSF075I	39/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
1	Z10SDSF100I	45/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
1.5	Z15SDSF100I	55/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
2	Z20SDSF125I	31/32 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
2.5	Z25SDSF125I	1-3/16 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
3	Z30SDSF150I	1-13/32 ~ 1-7/8	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4
4	Z40SDSF150I	1-29/32 ~ 2-9/16	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4

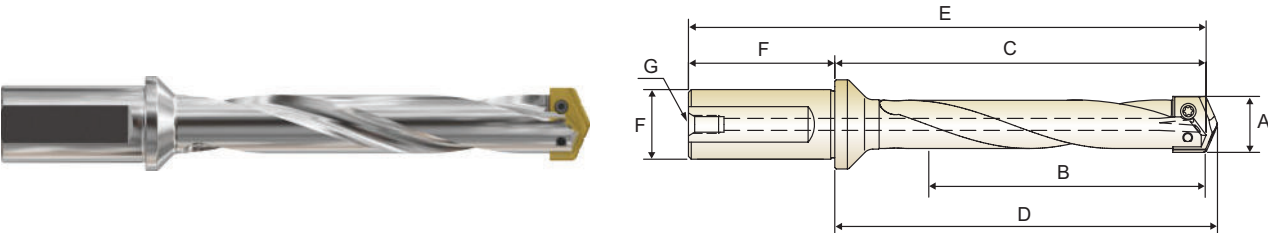

STANDARD LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		
Y	ZY0SDHF075I	3/8 ~ 27/64	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
Z	ZZ0SDHF075I	7/16 ~ 1/2	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
0	Z00SDHF075I	33/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
0.5	Z05SDHF075I	39/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
1	Z10SDHF100I	45/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
1.5	Z15SDHF100I	55/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
2	Z20SDHF125I	31/32 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
2.5	Z25SDHF125I	1-3/16 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
3	Z30SDHF150I	1-13/32 ~ 1-7/8	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4
4	Z40SDHF150I	1-29/32 ~ 2-9/16	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4



Z**EXSF SERIES


Z**EXHF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

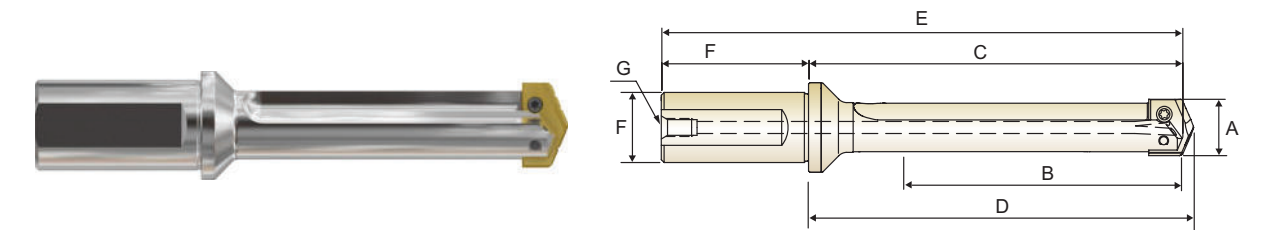

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
							F		
Y	ZY0EXSF075I	3/8 ~ 27/64	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
Z	ZZ0EXSF075I	7/16 ~ 1/2	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
0	Z00EXSF075I	33/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
0.5	Z05EXSF075I	39/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
1	Z10EXSF100I	45/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
1.5	Z15EXSF100I	55/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
2	Z20EXSF125I	31/32 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4
2.5	Z25EXSF125I	1-3/16 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4

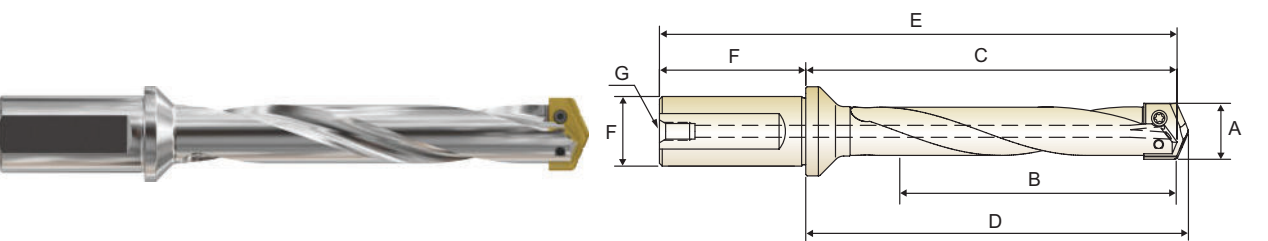

EXTENDED LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
		F							
Y	ZY0EXHF075I	3/8 ~ 27/64	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
Z	ZZ0EXHF075I	7/16 ~ 1/2	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
0	Z00EXHF075I	33/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
0.5	Z05EXHF075I	39/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
1	Z10EXHF100I	45/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
1.5	Z15EXHF100I	55/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
2	Z20EXHF125I	31/32 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4
2.5	Z25EXHF125I	1-3/16 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA



Z**SBSF SERIES


Z**STSF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

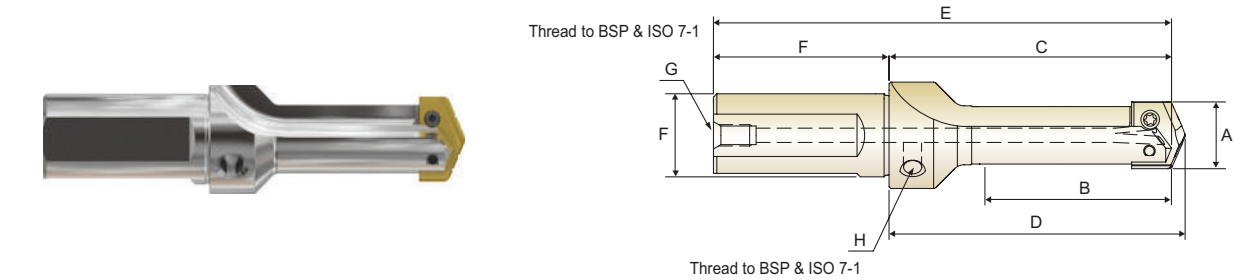

STUB LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap	
							Dia.	Length	Rear	Side
		A	B	C	D	E	F		G	H
Y	ZY0SBSF016M	9.5 ~ 11.0	19.1	47.6	50.0	95.6	16.0	48.0	1/16	1/8
Z	ZZ0SBSF016M	11.5 ~ 12.5	19.1	47.6	50.0	95.6	16.0	48.0	1/16	1/8
0	Z00SBSF020M	13.0 ~ 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8	1/8
0.5	Z05SBSF020M	15.5 ~ 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8	1/8
1	Z10SBSF025M	18.0 ~ 24.0	47.6	75.8	79.4	131.8	25.0	56.0	1/8	1/8
1.5	Z15SBSF025M	22.0 ~ 24.0	57.2	88.5	92.1	144.5	25.0	56.0	1/8	1/8
2	Z20SBSF032M	25.0 ~ 35.0	57.2	88.5	92.1	148.5	32.0	60.0	1/4	1/8
2.5	Z25SBSF032M	30.0 ~ 35.0	92.1	123.4	127.0	183.4	32.0	60.0	1/4	1/8
3	Z30SBSF040M	36.0 ~ 47.0	76.2	125.0	129.8	195.0	40.0	70.0	1/4	1/4

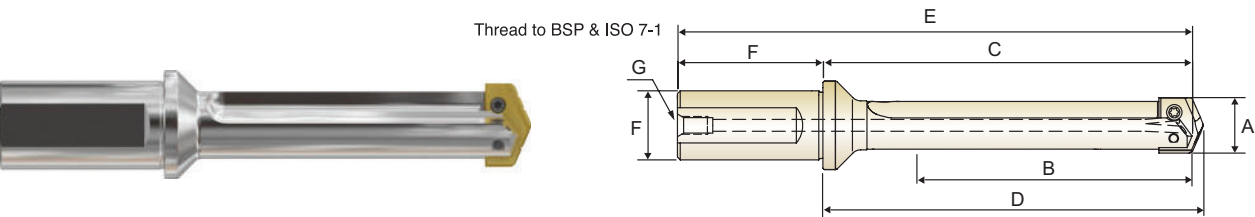

SHORT LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
Y	ZY0STSF020M	9.5 ~ 11.0	31.8	61.1	63.5	111.1	20.0	50.0	1/8
Z	ZZ0STSF020M	11.5 ~ 12.5	31.8	61.1	63.5	111.1	20.0	50.0	1/8
0	Z00STSF020M	13.0 ~ 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8
0.5	Z05STSF020M	15.5 ~ 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8
1	Z10STSF025M	18.0 ~ 24.0	66.7	107.2	110.7	163.2	25.0	56.0	1/8
1.5	Z15STSF025M	22.0 ~ 24.0	66.7	107.2	110.7	163.2	25.0	56.0	1/8
2	Z20STSF032M	25.0 ~ 35.0	85.7	128.6	132.2	188.6	32.0	60.0	1/4
2.5	Z25STSF032M	30.0 ~ 35.0	85.7	128.6	132.2	188.6	32.0	60.0	1/4
3	Z30STSF040M	36.0 ~ 47.0	120.7	173.0	177.8	243.0	40.0	70.0	1/4
4	Z40STSF040M	48.0 ~ 65.0	130.2	179.4	184.0	249.4	40.0	70.0	1/4



Z**ITHF SERIES


Z**SDHF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

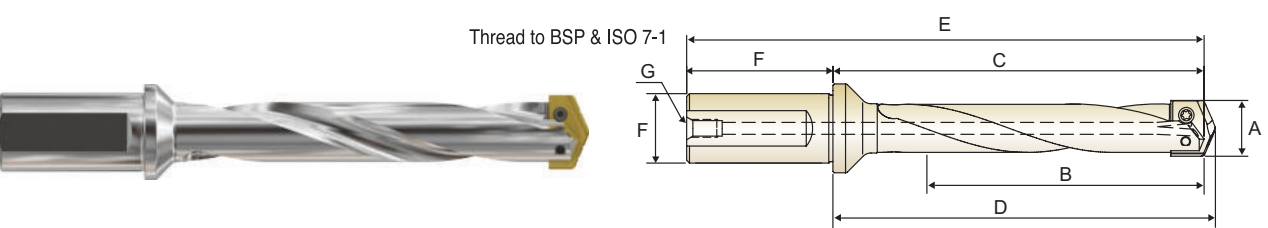

INTERMEDIATE LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
1	Z10ITHF025M	18.0 ~ 24.0	117.5	154.8	158.4	210.8	25.0	56.0	1/8
1.5	Z15ITHF025M	22.0 ~ 24.0	117.5	154.8	158.4	210.8	25.0	56.0	1/8
2	Z20ITHF032M	25.0 ~ 35.0	136.5	179.4	183.0	239.4	32.0	60.0	1/4
2.5	Z25ITHF032M	30.0 ~ 35.0	136.5	179.4	183.0	239.4	32.0	60.0	1/4
3	Z30ITHF040M	36.0 ~ 47.0	165.1	217.5	222.3	287.5	40.0	70.0	1/4

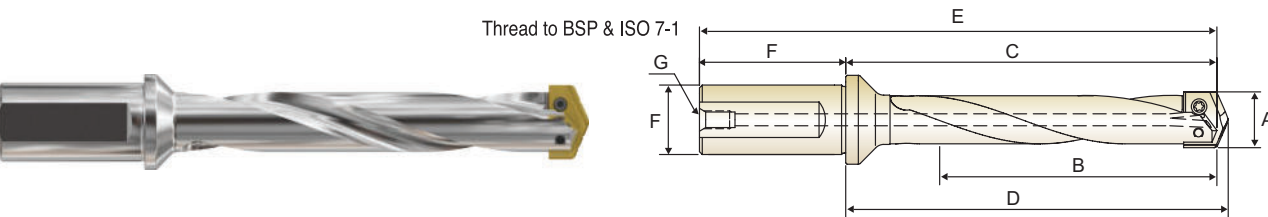

STANDARD LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
Y	ZY0SDHF020M	9.5 ~ 11.0	60.3	89.7	92.1	139.7	20.0	50.0	1/8
Z	ZZ0SDHF020M	11.5 ~ 12.5	60.3	89.7	92.1	139.7	20.0	50.0	1/8
0	Z00SDHF020M	13.0 ~ 17.5	63.5	92.1	94.9	142.1	20.0	50.0	1/8
0.5	Z05SDHF020M	15.5 ~ 17.5	63.5	92.1	94.9	142.1	20.0	50.0	1/8
1	Z10SDHF025M	18.0 ~ 24.0	168.3	205.6	209.2	261.6	25.0	56.0	1/8
1.5	Z15SDHF025M	22.0 ~ 24.0	168.3	205.6	209.2	261.6	25.0	56.0	1/8
2	Z20SDHF032M	25.0 ~ 35.0	187.3	230.2	233.8	290.2	32.0	60.0	1/4
2.5	Z25SDHF032M	30.0 ~ 35.0	187.3	230.2	233.8	290.2	32.0	60.0	1/4
3	Z30SDHF040M	36.0 ~ 47.0	209.6	261.9	266.7	331.9	40.0	70.0	1/4
4	Z40SDHF040M	48.0 ~ 65.0	231.8	281.0	285.8	351.0	40.0	70.0	1/4

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA



Z**EXHF SERIES


Z**EXSF SERIES

FLANGED STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE


Porte-plaquette à colerette queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

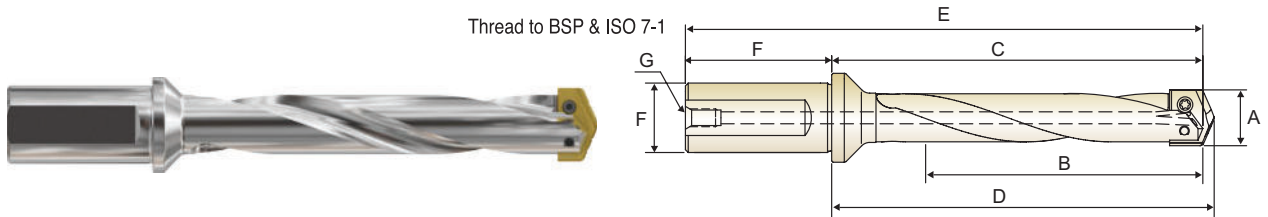

EXTENDED LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
Y	ZY0EXHF020M	9.5 ~ 11.0	111.1	140.5	142.9	190.5	20.0	50.0	1/8
Z	ZZ0EXHF020M	11.5 ~ 12.5	111.1	140.5	142.9	190.5	20.0	50.0	1/8
0	Z00EXHF020M	13.0 ~ 17.5	114.3	142.9	145.7	192.9	20.0	50.0	1/8
0.5	Z05EXHF020M	15.5 ~ 17.5	114.3	142.9	145.7	192.9	20.0	50.0	1/8
1	Z10EXHF025M	18.0 ~ 24.0	269.9	307.2	310.8	363.2	25.0	56.0	1/8
1.5	Z15EXHF025M	22.0 ~ 24.0	269.9	307.2	310.8	363.2	25.0	56.0	1/8
2	Z20EXHF032M	25.0 ~ 35.0	288.9	331.8	335.4	391.8	32.0	60.0	1/4
2.5	Z25EXHF032M	30.0 ~ 35.0	288.9	331.8	335.4	391.8	32.0	60.0	1/4

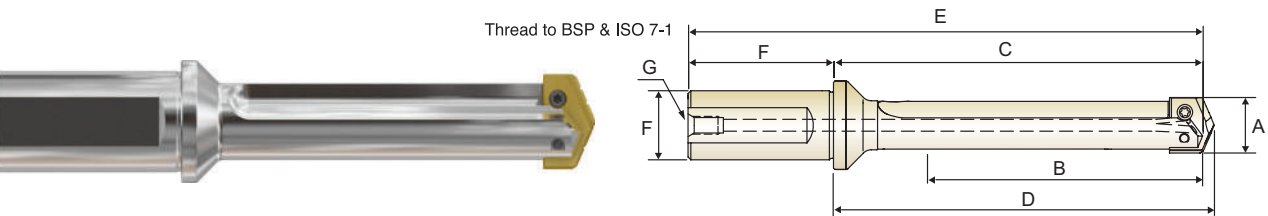

EXTENDED LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
3	Z30EXSF040M	36.0 ~ 47.0	349.3	401.6	406.4	471.6	40.0	70.0	1/4
4	Z40EXSF040M	48.0 ~ 65.0	422.3	471.5	476.3	541.5	40.0	70.0	1/4




Z**STSS SERIES

STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT


Porte-plaquette à queue cylindrique

PUNTE ATTACCO CILINDRICO FLANGIATO

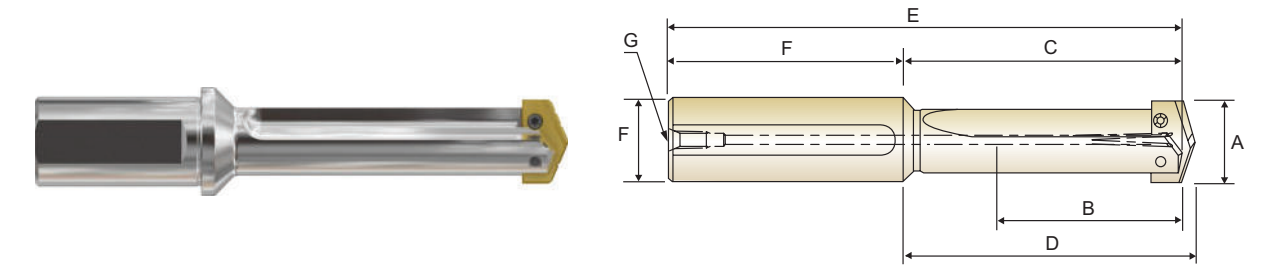

SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
Y	ZY0STSS075I	3/8 ~ 27/64	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8
Z	ZZ0STSS075I	7/16 ~ 1/2	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8
0	Z00STSS075I	33/64 ~ 11/16	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8
0.5	Z05STSS075I	39/64 ~ 11/16	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8

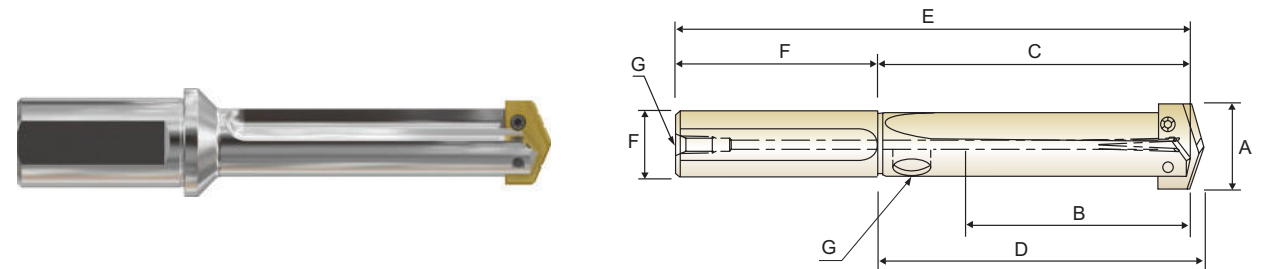

SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	
1	* Z10STSS075I	45/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8
	Z10STSS100I	45/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8
1.5	* Z15STSS075I	55/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8
	Z15STSS100I	55/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8
2	Z20STSS100I	31/32 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8
	Z20STSS125I	31/32 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8
2.5	* Z25STSS100I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8
	Z25STSS125I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8
3	Z30STSS125I	1-13/32 ~ 1-7/8	4-3/4	6	6-3/16	10	1-1/4	4	1/4
	Z30STSS150I	1-13/32 ~ 1-7/8	4-3/4	6	6-3/16	10	1-1/2	4	1/4
4	Z40STSS150I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	6-11/16	10-1/2	1-1/2	4	1/4
	Z40STSS175I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	6-11/16	10-1/2	1-3/4	4	1/4
5	Z50STSS200I	2-1/2 ~ 3-1/2	6-3/4	8-1/2	8-3/4	12-1/2	2	4	1/2

► * Flanged type

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES


TECHNICAL
DATA



Z**ITSS SERIES

STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

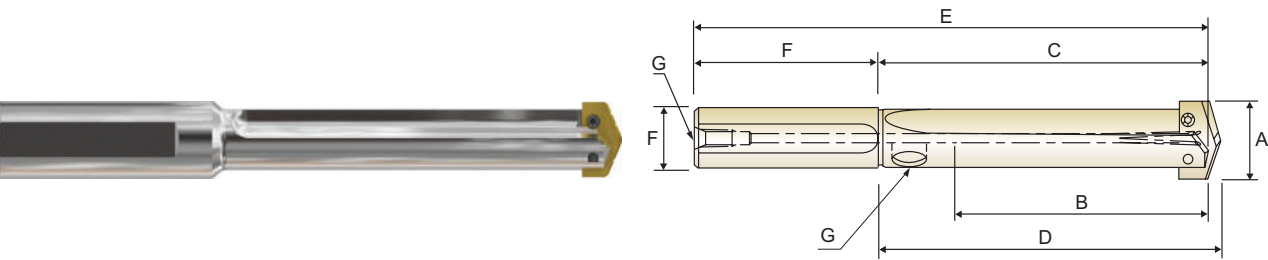

INTERMEDIATE LENGTH - Straight Flute (Inch)


Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10ITSS100I	45/64 ~ 15/16	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8
1.5	Z15ITSS100I	55/64 ~ 15/16	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8
2	Z20ITSS125I	31/32 ~ 1-3/8	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8
2.5	Z25ITSS125I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8
3	Z30ITSS150I	1-13/32 ~ 1-7/8	6-1/2	7-3/4	7-15/16	11-3/4	1-1/2	4	1/4



Z**SDSS SERIES


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

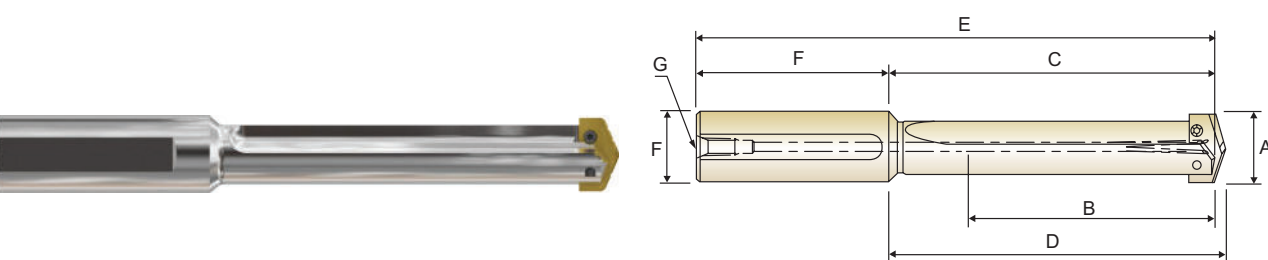

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0SDSS075I	3/8 ~ 27/64	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8
Z	ZZ0SDSS075I	7/16 ~ 1/2	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8
0	Z00SDSS075I	33/64 ~ 11/16	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8
0.5	Z05SDSS075I	39/64 ~ 11/16	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8

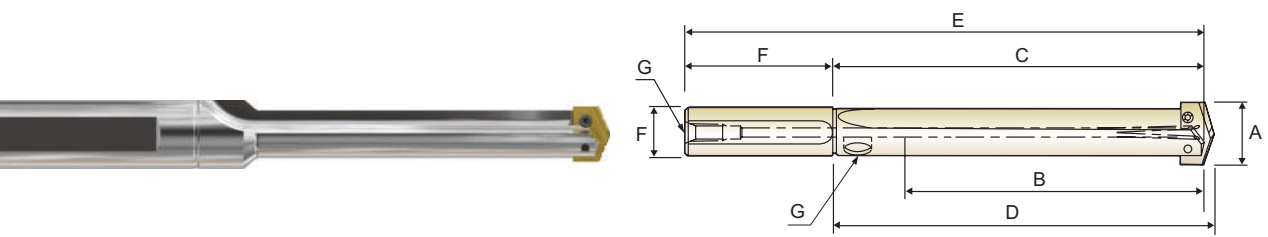

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	* Z10SDSS075I	45/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8
	Z10SDSS100I	45/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8
1.5	* Z15SDSS075I	55/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8
	Z15SDSS100I	55/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8
2	Z20SDSS100I	31/32 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8
	Z20SDSS125I	31/32 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8
2.5	* Z25SDSS100I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8
	Z25SDSS125I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8
3	Z30SDSS125I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	9-11/16	13-1/2	1-1/4	4	1/4
	Z30SDSS150I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	9-11/16	13-1/2	1-1/2	4	1/4
4	Z40SDSS150I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	10-11/16	14-1/2	1-1/2	4	1/4
	Z40SDSS175I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	10-11/16	14-1/2	1-3/4	4	1/4
5~6	Z50SDSS200I	2-1/2 ~ 3-1/2	10-3/4	12-1/2	12-3/4	16-1/2	2	4	1/2
7~8	Z70SDSS300I	3-17/32 ~ 4-1/2	10-3/4	12-7/8	13-1/8	17-7/8	3	5	1/2

► * Flanged type

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES


TECHNICAL
DATA



Z**EXSS SERIES


STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT
Porte-plaquette à queue cylindrique
PUNTE ATTACCO CILINDRICO FLANGIATO

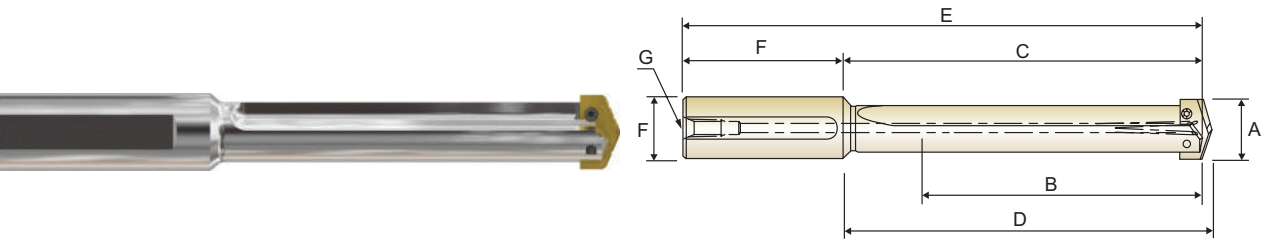

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	G
Y	ZY0EXSS075I	3/8 ~ 27/64	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8
Z	ZZ0EXSS075I	7/16 ~ 1/2	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8
0	Z00EXSS075I	33/64 ~ 11/16	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8
0.5	Z05EXSS075I	39/64 ~ 11/16	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8

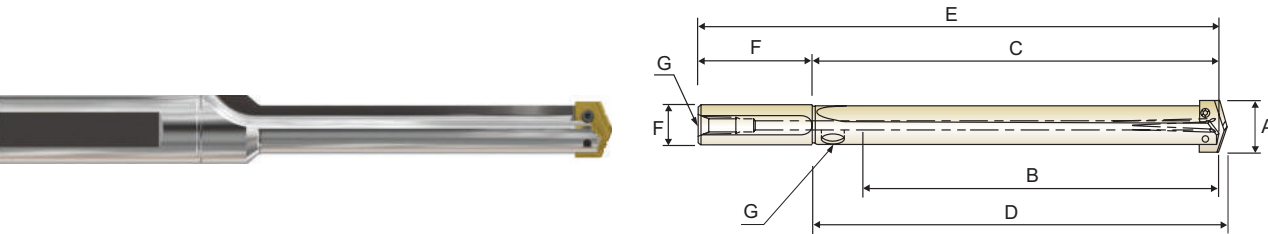

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	G
1	Z10EXSS100I	45/64 ~ 15/16	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8
1.5	Z15EXSS100I	55/64 ~ 15/16	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8
2	Z20EXSS125I	31/32 ~ 1-3/8	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8
2.5	Z25EXSS125I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8
3	Z30EXSS125I	1-13/32 ~ 1-7/8	13-3/4	15	15-3/16	19	1-1/4	4	1/4
4	Z40EXSS150I	1-29/32 ~ 2-9/16	16-5/8	18	18-3/16	22	1-1/2	4	1/4
5~6	Z50EXSS200I	2-1/2 ~ 3-1/2	18-1/4	20	20-1/4	24	2	4	1/2
7~8	Z70EXSS300I	3-17/32 ~ 4-1/2	21-7/8	24	24-1/4	29	3	5	1/2



Z**LGSS SERIES

STRAIGHT SHANK HOLDERS

HALTER MIT ZYLINDERSCHAFT
Porte-plaquette à queue cylindrique
PUNTE ATTACCO CILINDRICO FLANGIATO



LONG LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
		A	B	C	D	E	Dia.	Length	G
0	Z00LGSS075I	33/64 ~ 11/16	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8
0.5	Z05LGSS075I	39/64 ~ 11/16	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

CARBIDE

HSS

SPADE DRILLS

RECOMMENDED CUTTING CONDITIONS

EMPFOHLENE SCHNEIDKONDITIONEN

HOLDER ACCESSORIES

ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES

O-Ring Replacements

D

E

B

C

Inch

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap
	A	B	C	D	E
PR110048	3/4	1-3/4	7/8	5/16-NC	1/8
PR110100	1	2-1/8	1-1/8	5/16-NC	1/8
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	1/4
PR110148	1-3/4	3	1-3/8	3/8-NC	1/4
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	1/2

Metric

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap
	A	B	C	D	E
PR120190	19.05	44.45	22.23	M8 × 1.25	1/8
PR120254	25.40	53.97	28.57	M8 × 1.25	1/8
PR120317	31.75	63.50	34.92	M10 × 1.5	1/4
PR120444	44.45	76.20	34.92	M10 × 1.5	1/4
PR120571	57.15	95.27	44.45	M12 × 1.75	1/2

Thread to BSP & ISO 7-1

TORX SCREWS

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210		33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310	J0500080	39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610		31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710	J0520150	1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810	J0530200	1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910	J0550250	2-1/2 ~ 4-1/2	64.0 mm ~ 114.0 mm

** Note : Replacement screws sold in packages(10 screws per package)

A374

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

CARBIDE

HSS

SPADE DRILLS

RECOMMENDED CUTTING CONDITIONS

EMPFOHLENE SCHNEIDKONDITIONEN

SPADE DRILL HSS M4

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.3	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79

The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

A375

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.



SPADE DRILL CARBIDE P40

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed				
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46
	2		76	82	96	0.15	0.22	0.29	0.36	0.40
	3		66	70	84	0.15	0.22	0.28	0.36	0.40
	4		66	70	84	0.15	0.22	0.28	0.36	0.40
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42
	7		66	73	81	0.15	0.21	0.28	0.37	0.41
	8		62	70	78	0.12	0.20	0.27	0.33	0.40
	9		53	58	64	0.10	0.18	0.23	0.30	0.38
	10	High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28	0.31
	11		37	46	50	0.09	0.18	0.22	0.28	0.31
M	12	Stainless steel	38	43	47	0.10	0.18	0.20	0.24	0.30
	13		38	43	47	0.10	0.18	0.20	0.24	0.30
	14		43	49	55	0.12	0.20	0.23	0.27	0.35
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
	20		66	81	93	0.13	0.15	0.28	0.33	0.37
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53
	22		244	290	291	0.22	0.33	0.40	0.45	0.48
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30
	32		38	44	46	0.15	0.17	0.20	0.21	0.25
	33		38	44	46	0.15	0.17	0.20	0.21	0.25
	34		38	44	46	0.15	0.17	0.20	0.21	0.25
	35		38	44	46	0.15	0.17	0.20	0.21	0.25
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30

- The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.