


DH510, DH515, DH520, DHM10, DHM15, DHM20, DHM25, DHM30 SERIES

with COOLANT HOLES

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc		Parameter	Drill Diameter (mm)							
			10xD 20xD	25xD 30xD		3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0
P	1	Non-alloy steel	120	100	RPM(10xD-20xD)	12730	9550	7640	6370	4770	3820	3180	2730
					RPM(25xD-30xD)	10610	7960	6370	5310	3980	3180	2650	2270
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
	2		100	80	RPM(10xD-20xD)	10610	7960	6370	5310	3980	3180	2650	2270
					RPM(25xD-30xD)	8490	6370	5090	4240	3180	2550	2120	1820
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
	3		80	65	RPM(10xD-20xD)	8490	6370	5090	4240	3180	2550	2120	1820
					RPM(25xD-30xD)	6900	5170	4140	3450	2590	2070	1720	1480
					FEED	0.06-0.10	0.08-0.12	0.10-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.18-0.24	0.20-0.26
	6	Low alloy steel	100	100	RPM(10xD-20xD)	10610	7960	6370	5310	3980	3180	2650	2270
					RPM(25xD-30xD)	10610	7960	6370	5310	3980	3180	2650	2270
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
	7		70	60	RPM(10xD-20xD)	7430	5570	4460	3710	2790	2230	1860	1590
					RPM(25xD-30xD)	6370	4770	3820	3180	2390	1910	1590	1360
					FEED	0.06-0.10	0.08-0.12	0.10-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.18-0.24	0.20-0.26
	8	High alloyed steel, and tool steel	55	50	RPM(10xD-20xD)	5840	4380	3500	2920	2190	1750	1460	1250
					RPM(25xD-30xD)	5310	3980	3180	2650	1990	1590	1330	1140
					FEED	0.06-0.10	0.08-0.12	0.10-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.18-0.24	0.20-0.26
	10		60	50	RPM(10xD-20xD)	6370	4770	3820	3180	2390	1910	1590	1360
					RPM(25xD-30xD)	5310	3980	3180	2650	1990	1590	1330	1140
					FEED	0.05-0.09	0.07-0.11	0.08-0.14	0.10-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.18-0.24
	11		50	45	RPM(10xD-20xD)	5310	3980	3180	2650	1990	1590	1330	1140
					RPM(25xD-30xD)	4770	3580	2860	2390	1790	1430	1190	1020
					FEED	0.04-0.08	0.06-0.10	0.07-0.13	0.08-0.14	0.10-0.16	0.12-0.18	0.13-0.19	0.15-0.21
K	15	Grey cast iron	90	75	RPM(10xD-20xD)	9550	7160	5730	4770	3580	2860	2390	2050
					RPM(25xD-30xD)	7960	5970	4770	3980	2980	2390	1990	1710
					FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
	16		70	60	RPM(10xD-20xD)	7430	5570	4460	3710	2790	2230	1860	1590
					RPM(25xD-30xD)	6370	4770	3820	3180	2390	1910	1590	1360
					FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
	17	Nodular cast iron	100	80	RPM(10xD-20xD)	10610	7960	6370	5310	3980	3180	2650	2270
					RPM(25xD-30xD)	8490	6370	5090	4240	3180	2550	2120	1820
					FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
	18		70	60	RPM(10xD-20xD)	7430	5570	4460	3710	2790	2230	1860	1590
					RPM(25xD-30xD)	6370	4770	3820	3180	2390	1910	1590	1360
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
	19	Malleable cast iron	80	65	RPM(10xD-20xD)	8490	6370	5090	4240	3180	2550	2120	1820
					RPM(25xD-30xD)	6900	5170	4140	3450	2590	2070	1720	1480
					FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
	20		70	55	RPM(10xD-20xD)	7430	5570	4460	3710	2790	2230	1860	1590
					RPM(25xD-30xD)	5840	4380	3500	2920	2190	1750	1460	1250
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31

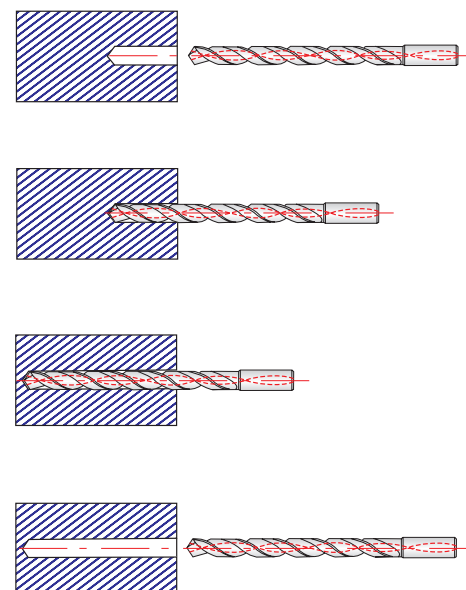

1. Guide Drilling should be done as Diameter +0.01~+0.1mm between 3xD and 5xD depth.
2. For Main Drilling, proceed with low RPM at Guide Drilling segment.
(RPM 300, FEED 400mm/min)
3. Just before the end of Guide Drilling segment, reduce feed to zero and increase the RPM according to Recommended Cutting Condition chart (See above).
4. After then, proceed main drilling by increasing feed without step drilling.
5. When coming out from Guide Drilling start point after drilling, RPM should be reduced as 300 and feed should be 1000 mm/min.
6. When coming out from Guide Drilling segment to the outside, the feed should be decreased as 50%.

SOLID CARBIDE

DREAM DRILLS for HIGH HARDENED STEELS

- For High Hardened Steels (HRc50 to HRc70)


DREAM DRILLS for HIGH HARDENED STEELS

Low Helix

The low Helix angle maximizes tools' rigidity and stability with less deflection

Special Thinning (R+U Thinning)

Unique drill point geometry with special thinning to minimize cutting workload, axial thrust loading and heat generation.

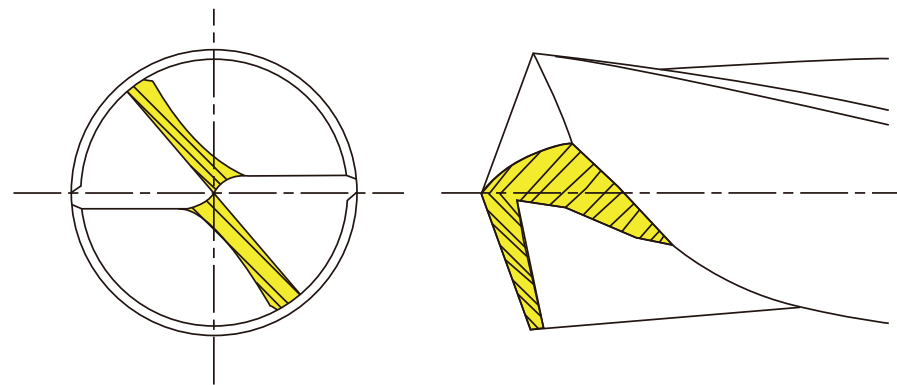


Coating

TiAlN nano coating combines high hardness with high thermal stability against oxidation, allows machining the upper level of hardened steels HRc 50-70.

Polished Flutes

Polished flutes improve coating addition, with better chip control and evacuation.

Point Shape


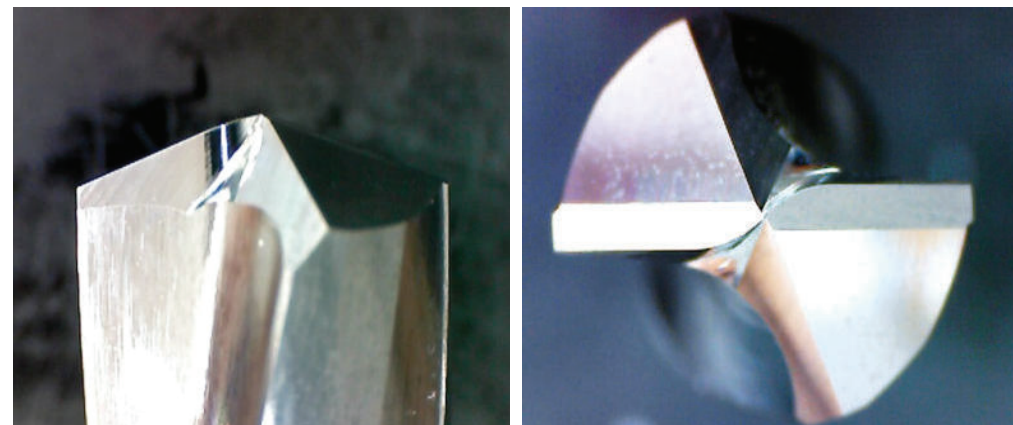


CASE STUDY

- Low Helix Angle to maximize tools' rigidity.
- Special Point Thinning to improve chip evacuation.
- Excellent Coating and Surface Treatment for improved surface and better chip evacuation.


► SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS (HRc50-70)

CUTTING CONDITION	
Tool	DH500100
Size(mm)	Ø10 × Ø10 × 63 × 111
Work Material	• DIN: X155CrV-Mo12-1 • WR: 1.2379 • JIS: SKD11(HRc60)
RPM	380 rev./min.
Feed	0.04 mm/rev.
Drilling Depth	25 mm
Coolant	Wet Cut

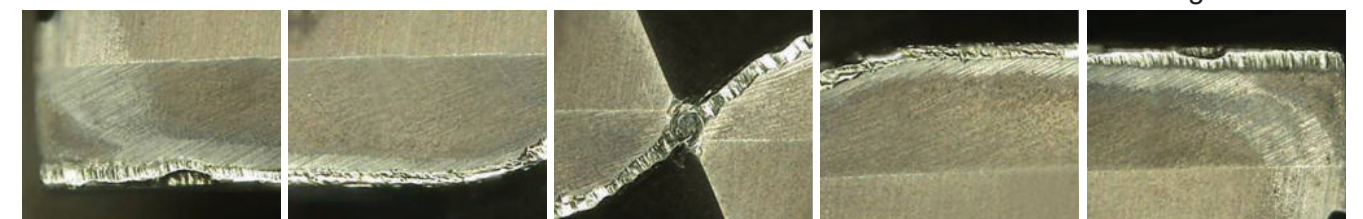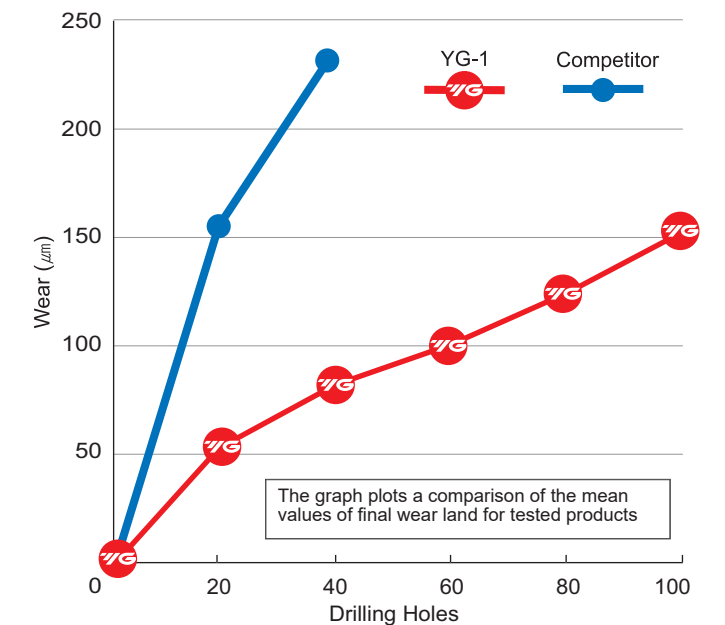

After Drilling 100 Holes


Competitor A

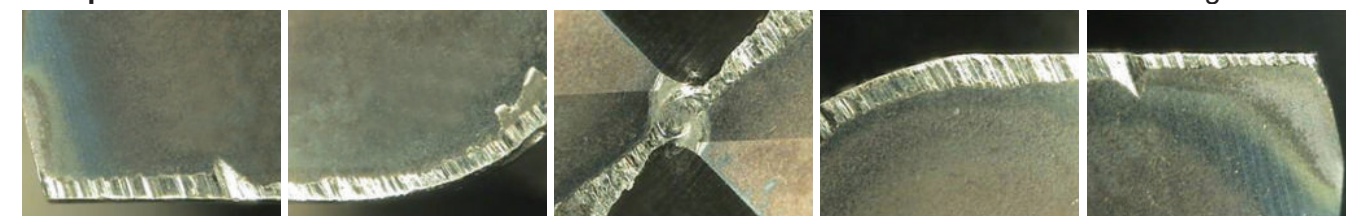

After Drilling 40 Holes

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS HIGH HARDENED STEELS without COOLANT HOLES (3XD) SERIES
DH500

- ▶ Drilling for High Hardened Steels; Quenched Steels, Tempered Steels (under HRc70)
- ▶ Special geometry design for Hardened Steels
- ▶ Minimum of cutting load through special thinning
- ▶ Performing good chip removal and powerful drilling

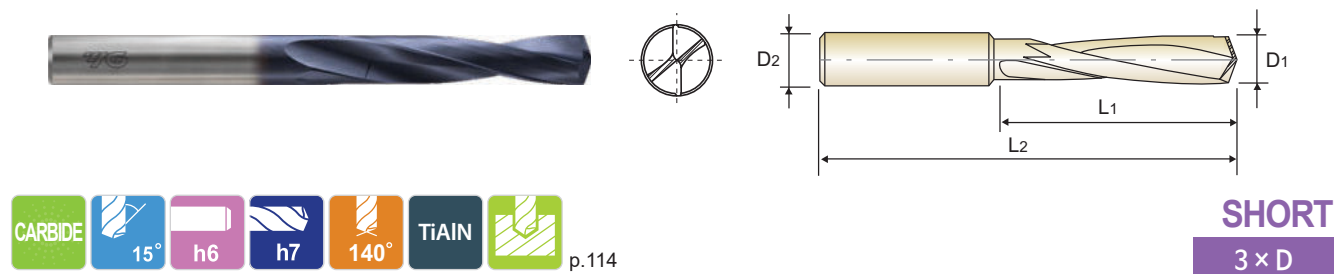

Unit : mm					SHORT 3 × D				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH500026	2.6	3	14	44	DH500070	7.0	8	45	85
DH500030	3.0	3	16	46	DH500075	7.5	8	45	85
DH500033	3.3	4	18	48	DH500080	8.0	8	50	98
DH500034	3.4	4	20	50	DH500085	8.5	10	50	98
DH500035	3.5	4	20	50	DH500086	8.6	10	57	105
DH500040	4.0	4	22	52	DH500088	8.8	10	57	105
DH500042	4.2	6	25	65	DH500090	9.0	10	57	105
DH500043	4.3	6	28	68	DH500095	9.5	10	57	105
DH500044	4.4	6	28	68	DH500100	10.0	10	63	111
DH500045	4.5	6	28	68	DH500102	10.2	12	63	111
DH500050	5.0	6	32	72	DH500103	10.3	12	63	111
DH500051	5.1	6	32	72	DH500105	10.5	12	63	111
DH500052	5.2	6	32	72	DH500108	10.8	12	71	119
DH500055	5.5	6	35	75	DH500110	11.0	12	71	119
DH500060	6.0	6	35	75	DH500115	11.5	12	71	119
DH500065	6.5	8	40	80	DH500120	12.0	12	71	119
DH500068	6.8	8	45	85	DH500140	14.0	14	77	125
DH500069	6.9	8	45	85					

Recommended cutting conditions

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)								
					2.5	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0
H	38	Hardened steel	20	RPM	2550	2120	1590	1270	1060	800	640	530	450
	FEED			0.01-0.03	0.01-0.03	0.01-0.04	0.01-0.04	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.06	0.01-0.06	
	15		RPM	1910	1590	1190	950	800	600	480	400	340	
			FEED	0.01-0.03	0.01-0.03	0.01-0.04	0.01-0.04	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.06	0.01-0.06	
	39.1		12	RPM	1530	1270	950	760	640	480	380	320	270
	39.3			FEED	0.01-0.03	0.01-0.03	0.01-0.04	0.01-0.04	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.06	0.01-0.06

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	P											M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended																						
ISO	N										S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze/Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled CastIron	Hardened CastIron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	40	41
HRC											15	30	25	38	34			55	60	70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended																		◎	◎	◎		

HIGH QUALITY PRODUCTS and ON TIME DELIVERY
for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TÜRKIYE
CZECH REPUBLIC	GERMANY	NORWAY	SWEDEN	UNITED KINGDOM	DENMARK
HUNGARY	POLAND	SERBIA	SWITZERLAND	AUSTRIA	GREECE
ALBANIA	BOSNIA AND HERZEGOVINA	UKRAINE	UZBEKISTAN	BULGARIA	
ESTONIA					

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SOUTH KOREA	VIETNAM
CHINA	ISRAEL	PAKISTAN	TAIWAN	
HONG KONG	JAPAN	PHILIPPINES	THAILAND	
INDIA	SAUDI ARABIA	SINGAPORE	UNITED ARAB EMIRATES	

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

YG-1 CO., LTD.

HEAD OFFICE
13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea
Phone: +82-32-526-0909
www.yg1.solutions
E-mail: yg1@yg1.solutions

YG-1 CO., LTD.

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

www.yg1.solutions

E-mail: yg1@yg1.solutions

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets



YG1YEDD2408010