



Leading Through Innovation



HSS PM60

ONLY ONE COATED PM60 END MILLS

Only One, beschichtete Pulvermetall PM60 Schaftfräser

- Perfect Solution of Carbide Chipping under Vibrations
- Perfekte Lösung bei Zerspanung unter Vibrationen

GYG74 GYF96	GYG52	GYG76 GYG02	GYF95	GYF94	GYF98	GYG03
----------------	-------	----------------	-------	-------	-------	-------

[illegible]

CARBIDE

HSS

ONLY ONE

COATED PM60

END MILLS

PLAIN SHANK

GYG77

SERIES

FLAT SHANK

GYF97

SERIES

PM60, 2 FLUTE BALL NOSE SHORT LENGTH

PM60, 2 SCHNEIDEN, STIRNRADIUS KURZ

REVÊTUE YG-ALCRN - PM60, 2 DENTS, SÉRIE COURTE, HÉMISPHERIQUE

RIVESTITA PM60, 2 TAGLIENTE SERIE CORTA SEMISFERICA

CARBIDE

HSS

ONLY ONE

COATED PM60

END MILLS

PLAIN SHANK

GYG72

SERIES

FLAT SHANK

GYF99


SERIES

PM60, 2 FLUTE SHORT LENGTH

PM60, 2 SCHNEIDEN, KURZ, ZENTRUMSCHNITT

REVÊTUE YG-ALCRN - PM60, 2 DENTS, SÉRIE COURTE (COUPE AU CENTRE)

RIVESTITA PM60, 2 TAGLIENTI SERIE CORTA (TAGLIENTE AL CENTRO)

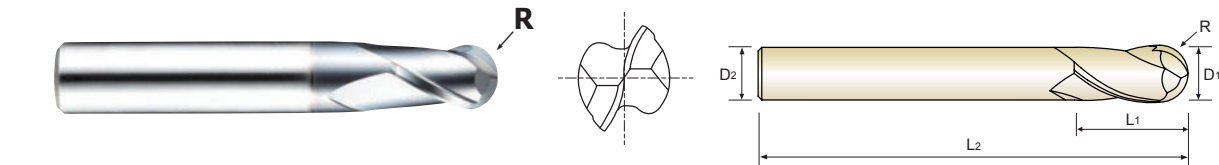

PM60

2

30°

±0.02

PLAIN

FLAT

Y Coating

p.C644


Unit : mm

EDP No.		Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R(±0.02)	D1	D2	L1	L2
GYG77010	GYF97010	R0.5	1.0	6	2.5	47
GYG77020	GYF97020	R1.0	2.0	6	4	48
GYG77030	GYF97030	R1.5	3.0	6	5	49
-	GYF97040	R2.0	4.0	6	7	51
-	GYF97050	R2.5	5.0	6	8	52
GYG77060	GYF97060	R3.0	6.0	6	8	52
-	GYF97070	R3.5	7.0	8	10	60
GYG77080	GYF97080	R4.0	8.0	8	11	61
GYG77090	GYF97090	R4.5	9.0	10	11	61
-	GYF97100	R5.0	10.0	10	13	63
GYG77120	GYF97120	R6.0	12.0	12	16	73
-	GYF97140	R7.0	14.0	12	16	73
GYG77160	GYF97160	R8.0	16.0	16	19	79
-	GYF97200	R10.0	20.0	20	22	88

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h6

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend						○	○	○												○

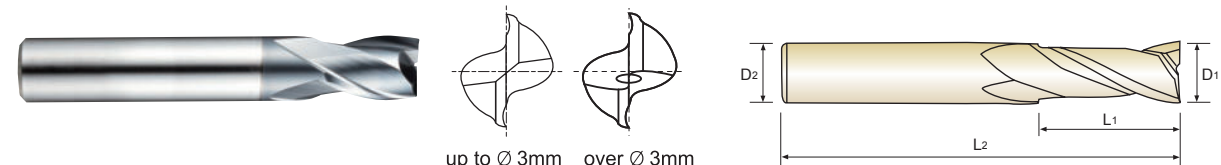

PM60

2

30°

PLAIN

FLAT

Y Coating

p.C645

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
-	GYF99010	1.0	6	2.5	47
-	GYF99020	2.0	6	4	48
GYG72030	GYF99030	3.0	6	5	49
GYG72040	GYF99040	4.0	6	7	51
GYG72050	GYF99050	5.0	6	8	52
GYG72060	GYF99060	6.0	6	8	52
GYG72070	GYF99070	7.0	8	10	60
GYG72080	GYF99080	8.0	8	11	61
GYG72090	GYF99090	9.0	10	11	61
GYG72100	GYF99100	10.0	10	13	63
GYG72120	GYF99120	12.0	12	16	73
-	GYF99140	14.0	12	16	73
GYG72160	GYF99160	16.0	16	19	79
GYG72180	GYF99180	18.0	16	19	79
GYG72200	GYF99200	20.0	20	22	88
GYG72220	GYF99220	22.0	20	22	88
GYG72250	-	25.0	25	26	102

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h6

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend						○	○	○												○

CARBIDE

HSS

ONLY ONE

COATED PM60

END MILLS

FLAT SHANK

GYF95


SERIES

PM60, MULTI FLUTE MULTIPLE HELIX SHORT LENGTH CORNER RADIUS ROUGHING - FINE (Center Cut)

PM60, MEHRSCHEIDEN, MIT UNGLEICHEM DRALL, KURZ, ECKENRADIUS, FEINKORDEL-SCHUPPFÄRÄSER, ZENTRUMSCHNITT

REVÊTUE YG-ALCRN - PM60, MULTI-DENTS, HÉLICE MULTIPLE, SÉRIE COURTE, RAYONNÉE, RAVAGEUSE, PAS FINS (COUPE AU CENTRE)

RIVESTITA PM60, MULTI TAGLIENTE ELICA VARIABILE SERIE CORTA TORICA PER SGROSSATURA - BOMBATO FINE (TAGLIENTE AL CENTRO)

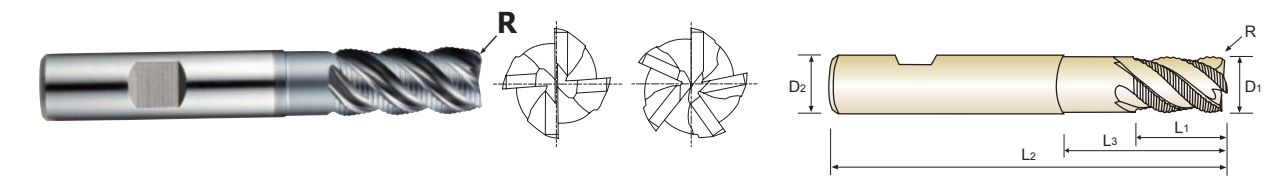

PM 60

4-5

44°/44.5° / 45°

HR

FLAT

Y Coating

p.C650

EDP No.	Corner Radius	Mill Diameter	Shank iameter	Length of Cut	Length Below Shank	Overall ength	No. of Flute
	R	D1(js12)	D2(h6)	L1	L3	L2	
GYF95060	R0.5	6.0	6	13	-	57	4
GYF95070	R0.5	7.0	10	16	-	66	4
GYF95080	R0.5	8.0	10	19	-	69	4
GYF95090	R0.5	9.0	10	19	-	69	4
GYF95100	R0.5	10.0	10	22	31	72	4
GYF95120	R0.5	12.0	12	26	37	83	4
GYF95140	R1.0	14.0	12	26	-	83	5
GYF95160	R1.0	16.0	16	32	44	92	5
GYF95180	R1.0	18.0	16	32	-	92	5
GYF95200	R1.0	20.0	20	38	54	104	5
GYF95250	R1.0	25.0	25	45	63	121	5

Tolerances according to DIN 7160 & 7161

Tolerance range in µm			
Nominal-Diameter in mm			
	over 6 to 10	over 10 to 18	over 18 to 30
js12	±75	±90	±105
h6	0 - 9	0 - 11	0 - 13

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32		10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S					H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○												○	

CARBIDE

HSS

ONLY ONE

COATED PM60

END MILLS

FLAT SHANK

GYF94


SERIES

PM60, MULTI FLUTE SHORT LENGTH ROUGHING - FINE (Center Cut)

PM60, MEHRSCHEIDEN, KURZ, FEINKORDEL-SCHUPPFÄRÄSER, ZENTRUMSCHNITT

REVÊTUE YG-ALCRN - PM60, MULTI-DENTS, SÉRIE COURTE, RAVAGEUSE, PAS FINS (COUPE AU CENTRE)

RIVESTITA PM60, MULTI TAGLIENTE SERIE CORTA PER SGROSSATURA - BOMBATO FINE (TAGLIENTE AL CENTRO)

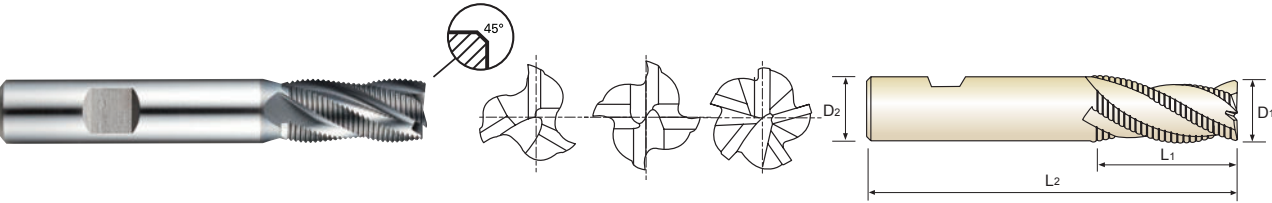

PM 60

3-5

30°

HR

FLAT

C x 45°

Y Coating

p.C651

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer
	D1(js12)	D2(h6)	L1	L2		
GYF94060	6.0	6	13	57	3	0.18
GYF94070	7.0	10	16	66	3	0.18
GYF94080	8.0	10	19	69	3	0.18
GYF94090	9.0	10	19	69	3	0.18
GYF94100	10.0	10	22	72	4	0.18
GYF94120	12.0	12	26	83	4	0.18
GYF94140	14.0	12	26	83	4	0.25
GYF94160	16.0	16	32	92	4	0.25
GYF94180	18.0	16	32	92	4	0.25
GYF94200	20.0	20	38	104	4	0.25
GYF94250	25.0	25	45	121	5	0.36

Tolerances according to DIN 7160 & 7161

Tolerance range in µm			
Nominal-Diameter in mm			
	over 6 to 10	over 10 to 18	over 18 to 30
js12	±75	±90	±105
h6	0 - 9	0 - 11	0 - 13


Enforced Cutting Edge

ISO	P											M				K										
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20						
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230						
Recommend	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	○	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙				
ISO	N										S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
HRc											15	30	25	38	34			55	60	42	55					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend						○	○	○												○						



PM60, MULTI FLUTE SHORT LENGTH ROUGHING - COARSE (Center Cut)

 PM60, MEHRSCHEIDEN, KURZ, SCHRUPPFÄSER, ZENTRUMSCHNITT
 REVÊTUE YG-ALCRN - PM60, MULTI-DENTS, SÉRIE COURTE, RAVAGEUSE, PAS GROSSIERS (COUPE AU CENTRE)
 **RIVESTITA PM60, MULTI TAGLIENTE SERIE CORTA PER SGROSSATURA - BOMBATO GROSSO (TAGLIENTE AL CENTRO)**

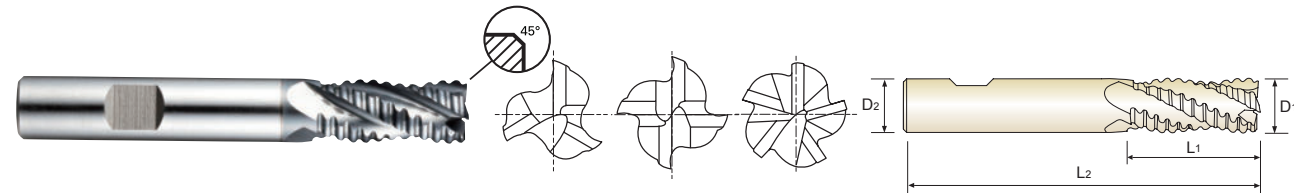


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer
	D1(js12)	D2(h6)	L1	L2		
GYG03060	6.0	6	13	57	3	0.25
GYG03070	7.0	10	16	66	3	0.25
GYG03080	8.0	10	19	69	3	0.25
GYG03090	9.0	10	19	69	3	0.36
GYG03100	10.0	10	22	72	4	0.36
GYG03120	12.0	12	26	83	4	0.56
GYG03140	14.0	12	26	83	4	0.6
GYG03160	16.0	16	32	92	4	0.6
GYG03180	18.0	16	32	92	4	0.6
GYG03200	20.0	20	38	104	4	0.6
GYG03250	25.0	25	45	121	5	0.6

Tolerances according to DIN 7160 & 7161

Tolerance range in μm			
Nominal-Diameter in mm			
	over 6 to 10	over 10 to 18	over 18 to 30
js12	± 75	± 90	± 105
h6	0 - 9	0 - 11	0 - 13

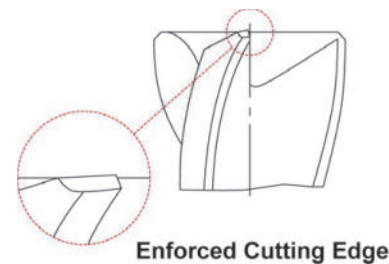

Enforced Cutting Edge

◎ : Excellent ○ : Good

[illegible]

C643




ONLY ONE COATED PM60 END MILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

GYG77 , GYF97 SERIES **2 FLUTE BALL NOSE**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1	Non-alloy steel	0.5D	0.2D	Vc	83	90	100	101	104	104	103	102	90
					fz	0.023	0.036	0.054	0.079	0.109	0.115	0.141	0.156	0.162
	RPM		8807	7162	5305	4019	3310	2759	2049	1623	1146			
	FEED		405	516	573	635	722	634	578	506	371			
	2		0.5D	0.2D	Vc	66	70	79	78	79	81	78	75	70
					fz	0.020	0.032	0.046	0.067	0.095	0.097	0.123	0.140	0.140
	RPM		7003	5570	4191	3104	2515	2149	1552	1194	891			
	FEED		280	357	386	416	478	417	382	334	250			
	3-4		0.5D	0.2D	Vc	44	45	52	54	53	54	54	52	44
					fz	0.016	0.026	0.039	0.056	0.082	0.083	0.1	0.11	0.125
	RPM		4669	3581	2759	2149	1687	1432	1074	828	560			
	FEED		149	186	215	241	277	238	215	182	140			
	5		0.5D	0.2D	Vc	23	24	27	27	26	26	27	27	24
					fz	0.014	0.023	0.035	0.047	0.073	0.071	0.090	0.099	0.100
	RPM		2440	1910	1432	1074	828	690	537	430	306			
	FEED		68	88	100	101	121	98	97	85	61			
	6		0.5D	0.2D	Vc	66	70	79	78	79	81	78	75	70
					fz	0.020	0.032	0.046	0.067	0.095	0.097	0.123	0.140	0.140
	RPM		7003	5570	4191	3104	2515	2149	1552	1194	891			
	FEED		280	357	386	416	478	417	382	334	250			
	7		0.5D	0.2D	Vc	44	45	52	54	53	54	54	52	44
					fz	0.016	0.026	0.039	0.056	0.082	0.083	0.1	0.11	0.125
	RPM		4669	3581	2759	2149	1687	1432	1074	828	560			
	FEED		149	186	215	241	277	238	215	182	140			
8-9	0.5D	0.2D	Vc	23	24	27	27	26	26	27	27	24		
			fz	0.014	0.023	0.035	0.047	0.073	0.071	0.090	0.099	0.100		
RPM	2440	1910	1432	1074	828	690	537	430	306					
FEED	68	88	100	101	121	98	97	85	61					
10	0.5D	0.2D	Vc	66	70	79	78	79	81	78	75	70		
			fz	0.020	0.032	0.046	0.067	0.095	0.097	0.123	0.140	0.140		
RPM	7003	5570	4191	3104	2515	2149	1552	1194	891					
FEED	280	357	386	416	478	417	382	334	250					
11.1	0.5D	0.2D	Vc	23	24	27	27	26	26	27	27	24		
			fz	0.014	0.023	0.035	0.047	0.073	0.071	0.090	0.099	0.100		
RPM	2440	1910	1432	1074	828	690	537	430	306					
FEED	68	88	100	101	121	98	97	85	61					
11.2	0.3D	0.2D	Vc	16	17	19	19	18	18	19	19	16		
			fz	0.013	0.024	0.035	0.047	0.075	0.071	0.088	0.1	0.095		
RPM	1698	1353	1008	756	573	477	378	302	204					
FEED	44	65	71	71	86	68	67	60	39					
M	14.1	Stainless steel	0.5D	0.2D	Vc	25	27	30	30	28	29	30	30	26
					fz	0.013	0.023	0.036	0.049	0.072	0.075	0.093	0.099	0.098
					RPM	2653	2149	1592	1194	891	769	597	477	331
					FEED	69	99	115	117	128	115	111	95	65
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.5D	0.2D	Vc	66	70	79	78	79	81	78	75	70
					fz	0.02	0.032	0.046	0.067	0.095	0.097	0.123	0.14	0.14
					RPM	7003	5570	4191	3104	2515	2149	1552	1194	891
					FEED	280	357	386	416	478	417	382	334	250
H	40	Chilled Cast Iron	0.3D	0.2D	Vc	16	17	19	19	18	18	19	19	16
					fz	0.013	0.024	0.035	0.047	0.075	0.071	0.088	0.1	0.095
					RPM	1698	1353	1008	756	573	477	378	302	204
					FEED	44	65	71	71	86	68	67	60	39




ONLY ONE COATED PM60 END MILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min

GYG72 , GYF99 SERIES **2 FLUTE - SLOTTING**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)													
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	25.0
P	1	Non-alloy steel	1.0D	0.5D	Vc	53	57	65	74	79	78	79	81	84	81	78	72	70	71
					fz	0.008	0.016	0.027	0.033	0.038	0.053	0.071	0.076	0.083	0.099	0.105	0.116	0.109	0.107
					RPM	8435	6048	5173	4711	4191	3104	2515	2149	1910	1611	1379	1146	1013	904
					FEED	135	194	279	311	319	329	357	327	317	319	290	266	221	186
	2		1.0D	0.5D	Vc	44	46	54	61	66	66	68	66	66	69	64	59	59	60
					fz	0.008	0.016	0.024	0.031	0.036	0.055	0.074	0.083	0.083	0.085	0.103	0.106	0.106	0.111
					RPM	7003	4881	4297	3883	3501	2626	2165	1751	1501	1373	1132	939	854	764
					FEED	112	156	206	241	252	289	320	291	249	233	233	199	181	171
	3-4		1.0D	0.5D	Vc	37	38	48	49	52	54	55	52	53	54	54	53	50	46
					fz	0.008	0.017	0.025	0.035	0.042	0.056	0.079	0.091	0.098	0.1	0.107	0.104	0.111	
					RPM	5889	4032	3820	3119	2759	2149	1751	1379	1205	1074	955	844	723	586
					FEED	94	137	191	218	232	241	277	251	236	215	191	181	150	139
5	1.0D	0.5D	Vc	24	26	30	32	33	35	34	34	33	34	34	33	33	34		
			fz	0.011	0.017	0.023	0.029	0.037	0.051	0.069	0.079	0.086	0.09	0.1	0.104	0.099	0.107		
			RPM	3820	2759	2387	2037	1751	1393	1082	902	750	676	601	525	477	433		
			FEED	84	94	110	118	130	142	149	142	129	122	120	109	95	91		
6	1.0D	0.5D	Vc	44	46	54	61	66	66	68	66	66	69	64	59	59	60		
			fz	0.008	0.016	0.024	0.031	0.036	0.055	0.074	0.083	0.083	0.085	0.103	0.106	0.106	0.111		
			RPM	7003	4881	4297	3883	3501	2626	2165	1751	1501	1373	1132	939	854	764		
			FEED	112	156	206	241	252	289	320	291	249	233	233	199	181	171		
7	1.0D	0.5D	Vc	37	38	48	49	52	54	55	52	53	54	54	53	50	46		
			fz	0.008	0.017	0.025	0.035	0.042	0.056	0.079	0.091	0.098	0.1	0.107	0.104	0.111			
			RPM	5889	4032	3820	3119	2759	2149	1751	1379	1205	1074	955	844	723	586		
			FEED	94	137	191	218	232	241	277	251	236	215	191	181	150	139		
8	1.0D	0.5D	Vc	24	26	30	32	33	35	34	34	33	34	34	33	33	34		
			fz	0.011	0.017	0.023	0.029	0.037	0.051	0.069	0.079	0.086	0.09	0.1	0.104	0.099	0.107		
			RPM	3820	2759	2387	2037	1751	1393	1082	902	750	676	601	525	477	433		
			FEED	84	94	110	118	130	142	149	142	129	122	120	109	95	91		
9	1.0D	0.3D	Vc	15	20	24	25	26	27	26	26	27	27	27	26	24	24		
			fz	0.01	0.017	0.023	0.028	0.036	0.047	0.071	0.071	0.079	0.09	0.094	0.099	0.086	0.1		
			RPM	2387	2122	1910	1592	1379	1074	828	690	591	537	477	430	376	306		
			FEED	48	72	88	89	99	101	118	98	93	97	90	85	65	61		
10	1.0D	0.5D	Vc	44	46	54	61	66	66	68	66	66	69	64	59	59	60		
			fz	0.008	0.016	0.024	0.031	0.036	0.055	0.074	0.083	0.083	0.085	0.103	0.106	0.106	0.111		
			RPM	7003	4881	4297	3883	3501	2626	2165	1751	1501	1373	1132	939	854	764		
			FEED	112	156	206	241	252	289	320	291	249	233	233	199	181	171		
11.1	1.0D	0.5D	Vc	24	26	30	32	33	35	34	34	33	34	34	33	33	34		
			fz	0.011	0.017	0.023	0.029	0.037	0.051	0.069	0.079	0.086	0.09	0.1	0.104	0.099	0.107		
			RPM	3820	2759	2387	2037	1751	1393	1082	902	750	676	601	525	477	433		
			FEED	84	94	110	118	130	142	149	142	129	122	120	109	95	91		
11.2	1.0D	0.3D	Vc	11	14	17	18	18	19	19	18	18	19	19	19	19	16		
			fz	0.01	0.018	0.024	0.029	0.036	0.047	0.072	0.071	0.077	0.088	0.096	0.1	0.083	0.09		
			RPM	1751	1485	1353	1146	955	756	605	477	409	378	336	302	275	204		
			FEED	35	53	65	66	69	71	87	68	63	67	65	60	46	39		
M	14.1	Stainless steel	1.0D	0.5D	Vc	17	22	27	28	29	30	29	29	29	29	30	29	26	
					fz	0.01	0.018	0.024	0.028	0.036	0.047	0.071	0.071	0.08	0.091	0.094	0.101	0.083	0.09
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	0.5D	Vc	44	46	54	61	66	66	68	66	69	64	59	59	60	
					fz	0.008	0.016	0.024	0.031	0.036	0.055	0.074	0.083	0.083	0.085	0.103	0.106	0.106	0.111
H	40	Chilled Cast Iron	1.0D	0.3D	Vc	11	14	17	18	18	19	19	18	18	19	19	19	17	
					fz	0.01	0.018	0.024	0.029	0.036	0.047	0.072	0.071	0.077	0.088	0.096	0.1	0.083	0.09
					RPM	1751	1485	1353	1146	955	756	605	477	409	378	336	302	275	204
					FEED	35	53	65	66	69	71	87	68	63	67	65	60	46	39



CARBIDE

HSS

ONLY ONE

COATED PM60


END MILLS

RECOMMENDED CUTTING CONDITIONS

EMPFOHLENE SCHNEIDPARAMETER

GYG01 SERIES		3 FLUTE - SLOTTING				Diameter (Ø)																	
ISO	VDI 3323	Material Description	Ae	Ap	Parameter	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	25.0				
P	1	Non-alloy steel	1.0D	0.5D	Vc	49	52	65	72	76	78	79	81	84	81	78	72	70	71				
					fz	0.004	0.007	0.011	0.014	0.023	0.031	0.04	0.051	0.052	0.06	0.07	0.08	0.091	0.107				
					RPM	7799	5517	5173	4584	4032	3104	2515	2149	1910	1611	1379	1146	1013	904				
					FEED	94	116	171	193	278	289	302	329	298	290	275	276	290					
	2	Non-alloy steel	1.0D	0.5D	Vc	41	44	54	60	63	66	68	66	71	69	61	60	61	60				
					fz	0.003	0.007	0.011	0.013	0.023	0.032	0.039	0.053	0.055	0.06	0.072	0.081	0.089	0.11				
					RPM	6525	4669	4297	3820	3342	2626	2165	1751	1614	1373	1079	955	883	764				
					FEED	59	98	142	149	231	252	253	278	266	247	233	232	236	252				
	3-4	Non-alloy steel	1.0D	0.5D	Vc	36	38	45	49	52	54	53	54	53	54	54	53	50	46				
					fz	0.003	0.005	0.009	0.012	0.021	0.028	0.038	0.047	0.053	0.056	0.063	0.067	0.083	0.107				
					RPM	5730	4032	3581	3119	2759	2149	1687	1432	1205	1074	955	844	723	586				
					FEED	52	60	97	112	174	180	192	202	192	180	180	170	180	188				
	5	Non-alloy steel	1.0D	0.5D	Vc	23	25	29	32	33	35	34	34	35	34	34	33	33	34				
					fz	0.004	0.007	0.009	0.012	0.021	0.029	0.044	0.052	0.055	0.06	0.064	0.069	0.08	0.093				
					RPM	3661	2653	2308	2037	1751	1393	1082	902	796	676	601	525	477	433				
					FEED	44	56	62	73	110	121	143	141	131	122	115	109	115	121				
	6	Low alloy steel	1.0D	0.5D	Vc	41	44	54	60	63	66	68	66	71	69	61	60	61	60				
					fz	0.003	0.007	0.011	0.013	0.023	0.032	0.039	0.053	0.055	0.06	0.072	0.081	0.089	0.11				
					RPM	6525	4669	4297	3820	3342	2626	2165	1751	1614	1373	1079	955	883	764				
					FEED	59	98	142	149	231	252	253	278	266	247	233	232	236	252				
	7	Low alloy steel	1.0D	0.5D	Vc	36	38	45	49	52	54	53	54	53	54	54	53	50	46				
					fz	0.003	0.005	0.009	0.012	0.021	0.028	0.038	0.047	0.053	0.056	0.063	0.067	0.083	0.107				
					RPM	5730	4032	3581	3119	2759	2149	1687	1432	1205	1074	955	844	723	586				
					FEED	52	60	97	112	174	180	192	202	192	180	180	170	180	188				
	8	Low alloy steel	1.0D	0.5D	Vc	23	25	29	32	33	35	34	34	35	34	34	33	33	34				
					fz	0.004	0.007	0.009	0.012	0.021	0.029	0.044	0.052	0.055	0.06	0.064	0.069	0.08	0.093				
					RPM	3661	2653	2308	2037	1751	1393	1082	902	796	676	601	525	477	433				
					FEED	44	56	62	73	110	121	143	141	131	122	115	109	115	121				
	9	Low alloy steel	1.0D	0.3D	Vc	14	20	23	25	25	27	26	26	27	27	27	26	24					
					fz	0.005	0.008	0.012	0.014	0.023	0.031	0.045	0.052	0.056	0.063	0.066	0.074	0.088	0.111				
					RPM	2228	2122	1830	1592	1326	1074	828	690	591	537	477	430	376	306				
					FEED	33	51	66	67	92	100	112	108	99	102	95	95	99	102				
	10	High alloyed steel, and tool steel	1.0D	0.5D	Vc	41	44	54	60	63	66	68	66	71	69	61	60	61	60				
					fz	0.003	0.007	0.011	0.013	0.023	0.032	0.039	0.053	0.055	0.06	0.072	0.081	0.089	0.11				
					RPM	6525	4669	4297	3820	3342	2626	2165	1751	1614	1373	1079	955	883	764				
					FEED	59	98	142	149	231	252	253	278	266	247	233	232	236	252				
	11.1	High alloyed steel, and tool steel	1.0D	0.5D	Vc	23	25	29	32	33	35	34	34	35	34	34	33	33	34				
					fz	0.004	0.007	0.009	0.012	0.021	0.029	0.044	0.052	0.055	0.06	0.064	0.069	0.08	0.093				
					RPM	3661	2653	2308	2037	1751	1393	1082	902	796	676	601	525	477	433				
					FEED	44	56	62	73	110	121	143	141	131	122	115	109	115	121				
	11.2	High alloyed steel, and tool steel	1.0D	0.3D	Vc	10	14	16	17	17	19	18	18	19	19	19	19	16					
					fz	0.005	0.009	0.012	0.014	0.024	0.031	0.044	0.051	0.056	0.063	0.064	0.072	0.086	0.111				
					RPM	1592	1485	1273	1082	902	756	573	477	409	378	336	302	275	204				
					FEED	24	40	46	45	65	70	76	73	69	71	65	65	71	68				
M	14.1	Stainless steel	1.0D	0.5D	Vc	41	44	54	60	63	66	68	66	71	69	61	60	61	60				
					fz	0.003	0.007	0.011	0.013	0.023	0.032	0.039	0.053	0.055	0.06	0.072	0.081	0.089	0.11				
					RPM	6525	4669	4297	3820	3342	2626	2165	1751	1614	1373	1079	955	883	764				
					FEED	59	98	142	149	231	252	253	278	266	247	233	232	236	252				
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	0.5D	Vc	41	44	54	60	63	66	68	66	71	69	61	60	61	60				
					fz	0.003	0.007	0.011	0.013	0.023	0.032	0.039	0.053	0.055	0.06	0.072	0.081	0.089	0.11				
					RPM	6525	4669	4297	3820	3342	2626	2165	1751	1614	1373	1079	955	883	764				
					FEED	59	98	142	149	231	252	253	278	266	247	233	232	236	252				
H	40	Chilled Cast Iron	1.0D	0.3D	Vc	10	14	16	17	17	19	18	18	19	19	19	19	16					
					fz	0.005	0.009	0.012	0.014	0.024	0.031	0.044	0.051	0.056	0.063	0.064	0.072	0.086	0.111				
					RPM	1592	1485	1273	1082	902	756	573	477	409	378	336	302	275	204				
					FEED	24	40	46	45	65	70	76	73	69	71	65	65	71	68				

CBN END MILLS	GYF95 SERIES MULTI FLUTE ROUGHING - SIDE CUTTING														Vc = m/min. fz = mm/tooth RPM = rev/min. FEED = mm/min.	
i-Xmill END MILLS	ISO	VDI 3323	Material Description	Ae	Ap	Parameter	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0	
i-SMART MODULAR END MILLS	P	1	Non-alloy steel	0.5D	1.5D	Vc	76	87	86	87	89	87	85	87	90	
fz						0.02	0.03	0.055	0.065	0.059	0.069	0.079	0.088	0.105		
RPM						4032	3462	2737	2308	2024	1731	1503	1385	1146		
FEED						323	415	602	600	597	597	594	609	602		
Vc						60	69	68	65	66	69	72	68	68		
fz		0.021		0.03	0.053	0.069	0.063	0.069	0.074	0.087	0.106					
RPM		3183		2745	2165	1724	1501	1373	1273	1082	866					
FEED		267		329	459	476	473	474	471	471	459					
Vc		43		51	47	49	48	48	50	48	47					
fz		0.018		0.028	0.046	0.063	0.061	0.069	0.075	0.086	0.107					
RPM		2281		2029	1496	1300	1091	955	884	764	598					
FEED		164		227	275	328	333	329	332	328	320					
Vc		43		51	47	49	48	48	50	48	47					
fz		0.018		0.028	0.046	0.063	0.061	0.069	0.075	0.086	0.107					
RPM		2281		2029	1496	1300	1091	955	884	764	598					
FEED		164	227	275	328	266	264	265	263	256						
Vc		35	38	40	40	40	40	40	40	41						
fz		0.02	0.03	0.045	0.061	0.057	0.066	0.073	0.081	0.1						
RPM		1857	1512	1273	1061	909	796	707	637	522						
FEED		149	181	229	259	259	263	258	258	261						
JET-POWER END MILLS		6	0.5D	1.5D	Vc	60	69	68	65	66	69	72	68	68		
fz					0.021	0.03	0.053	0.069	0.063	0.069	0.074	0.087	0.106			
RPM					3183	2745	2165	1724	1501	1373	1273	1082	866			
FEED	267				329	459	476	473	474	471	471	459				
Vc	43				51	47	49	48	48	50	48	47				
fz	0.018		0.028	0.046	0.063	0.061	0.069	0.075	0.086	0.107						
RPM	2281		2029	1496	1300	1091	955	884	764	598						
FEED	164		227	275	328	333	329	332	328	320						
Vc	35		38	40	40	40	40	40	40	41						
fz	0.02		0.03	0.045	0.061	0.057	0.066	0.073	0.081	0.1						
RPM	1857		1512	1273	1061	909	796	707	637	522						
FEED	149		181	229	259	259	263	258	258	261						
V7 PLUS END MILLS	7	0.5D	1.5D	Vc	60	69	68	65	66	69	72	68	68			
fz				0.021	0.03	0.053	0.069	0.063	0.069	0.074	0.087	0.106				
RPM				3183	2745	2165	1724	1501	1373	1273	1082	866				
ALU-POWER HPC END MILLS	8-9	0.5D	1.5D	Vc	43	51	47	49	48	48	50	48	47			
fz				0.018	0.028	0.046	0.063	0.061	0.069	0.075	0.086	0.107				
RPM				2281	2029	1496	1300	1091	955	884	764	598				
ALU-POWER END MILLS	10	0.5D	1.5D	FEED	164	227	275	328	333	329	332	328	320			
Vc				35	38	40	40	40	40	40	40	41				
fz				0.02	0.03	0.045	0.061	0.057	0.066	0.073	0.081	0.1				
D-POWER GRAPHITE END MILLS	11.1	0.5D	1.5D	RPM	1857	1512	1273	1061	909	796	707	637	522			
FEED				149	181	229	259	259	263	258	258	261				
Vc				60	69	68	65	66	69	72	68	68				
CRX S END MILLS	11.2	0.5D	1.5D	fz	0.021	0.03	0.053	0.069	0.063	0.069	0.074	0.087	0.106			
RPM				3183	2745	2165	1724	1501	1373	1273	1082	866				
FEED				267	329	459	476	473	474	471	471	459				
K-2 END MILLS	11.2	0.3D	1.5D	Vc	35	38	40	40	40	40	40	40	41			
fz				0.02	0.03	0.045	0.061	0.057	0.066	0.073	0.081	0.1				
RPM				1857	1512	1273	1061	909	796	707	637	522				
ONLY ONE COATED PM60 END MILLS	M	14.1	Stainless steel	0.5D	1.5D	FEED	149	181	229	259	259	263	258	258	261	
Vc						25	27	28	28	28	28	28	28	28		
fz						0.02	0.029	0.044	0.06	0.056	0.065	0.072	0.08	0.1		
TANK POWER END MILLS	K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.5D	1.5D	FEED	106	125	157	178	178	181	178	178	178	
Vc						39	43	43	43	44	43	45	44	44		
fz						0.019	0.03	0.045	0.064	0.059	0.069	0.075	0.084	0.104		
GENERAL HSS END MILLS	H	40	Chilled Cast Iron	0.3D	1.5D	RPM	2069	1711	1369	1141	1000	855	796	700	560	
FEED						157	205	246	292	295	295	298	294	291		
Vc						60	69	68	65	66	69	72	68	68		
MILLING CUTTERS	H	40	Chilled Cast Iron	0.3D	1.5D	fz	0.021	0.03	0.053	0.069	0.063	0.069	0.074	0.087	0.106	
RPM						3183	2745	2165	1724	1501	1373	1273	1082	866		
FEED						267	329	459	476	473	474	471	471	459		
	H	40	Chilled Cast Iron	0.3D	1.5D	Vc	25	27	28	28	28	28	28	28	28	
fz						0.02	0.029	0.044	0.06	0.056	0.065	0.072	0.08	0.1		
RPM						1326	1074	891	743	637	557	495	446	357		
	H	40	Chilled Cast Iron	0.3D	1.5D	FEED	106	125	157	178	178	181	178	178	178	
Vc						39	43	43	43	44	43	45	44	44		
fz						0.019	0.03	0.045	0.064	0.059	0.069	0.075	0.084	0.104		



GYF94, GYF98, GYG03					SERIES MULTI FLUTE ROUGHING - SIDE CUTTING										Vc = m/min. fz = mm/tooth RPM = rev/min. FEED = mm/min.				CBN END MILLS
ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)											i-Xmill END MILLS		
						6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0					
P	1	Non-alloy steel	0.5D	1.5D	Vc	63	72	72	72	74	72	71	72	75			i-SMART MODULAR END MILLS		
					fz	0.027	0.041	0.055	0.065	0.074	0.087	0.099	0.111	0.105					
	RPM		3342	2865	2292	1910	1682	1432	1256	1146	955			X1-EH END MILLS					
	FEED		271	352	504	497	498	498	497	509	501								
	Vc		50	57	57	54	55	57	61	57	57			X5070 END MILLS					
	fz		0.027	0.04	0.053	0.069	0.078	0.087	0.092	0.109	0.106								
	RPM		2653	2268	1814	1432	1251	1134	1079	907	726			4G MILL END MILLS					
	FEED		215	272	385	395	390	395	397	396	385								
	Vc		36	42	40	41	40	40	41	40	39			X-POWER PRO END MILLS					
	fz		0.024	0.038	0.047	0.064	0.076	0.087	0.094	0.107	0.106								
	RPM		1910	1671	1273	1088	909	796	725	637	497			TitaNox- POWER END MILLS					
	FEED		138	191	239	278	276	277	273	272	263								
	5	Low alloy steel	0.5D	1.5D	Vc	29	32	34	34	33	33	33	33	34			JET-POWER END MILLS		
	fz				0.027	0.04	0.044	0.06	0.071	0.081	0.091	0.101	0.1						
	RPM		1538	1273	1082	902	750	657	584	525	433			V7 PLUS END MILLS					
	FEED		125	153	190	216	213	213	212	212	216								
	Vc		50	57	57	54	55	57	61	57	57			ALU-POWER HPC END MILLS					
	fz		0.027	0.04	0.053	0.069	0.078	0.087	0.092	0.109	0.106								
	RPM		2653	2268	1814	1432	1251	1134	1079	907	726			ALU-POWER END MILLS					
	FEED		215	272	385	395	390	395	397	396	385								
	6		High alloyed steel, and tool steel	0.5D	1.5D	Vc	36	42	40	41	40	40	41	40	39			D-POWER GRAPHITE END MILLS	
	fz					0.024	0.038	0.047	0.064	0.076	0.087	0.094	0.107	0.106					
	RPM			1910	1671	1273	1088	909	796	725	637	497			CRX S END MILLS				
	FEED			138	191	239	278	276	277	273	272	263							
Vc	29	32		34	34	33	33	33	33	34			K-2 END MILLS						
fz	0.027	0.04		0.044	0.06	0.071	0.081	0.091	0.101	0.1									
RPM	1538	1273		1082	902	750	657	584	525	433			ONLY ONE COATED PM60 END MILLS						
FEED	125	153		190	216	213	213	212	212	216									
8-9	Chilled Cast Iron	0.5D		1.5D	Vc	21	22	24	23	23	23	23	23	24			TANK POWER END MILLS		
fz					0.028	0.04	0.045	0.06	0.071	0.082	0.091	0.101	0.1						
RPM		1114		875	764	610	523	458	407	366	306			GENERAL HSS					
FEED		94		105	138	146	149	150	148	148	153								
M		14.1	Stainless steel	0.5D	1.5D	Vc	33	36	36	36	37	36	37	37					
						fz	0.025	0.039	0.045	0.064	0.074	0.085	0.093	0.106	0.102				
K		15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.5D	1.5D	RPM	1751	1432	1146	955	841	716	654	573	471				
						FEED	131	168	206	244	249	244	243	243	240				
H		40		0.3D	1.5D	Vc	50	57	57	54	55	57	61	57	57				
						fz	0.027	0.04	0.053	0.069	0.078	0.087	0.092	0.109	0.106				
						RPM	2653	2268	1814	1432	1251	1134	1079	907	726				
						FEED	215	272	385	395	390	395	397	396	385				
					Vc	21	22	24	23	23	23	23	23	24					
					fz	0.028	0.04	0.045	0.06	0.071	0.082	0.091	0.101	0.1					
					RPM	1114	875	764	610	523	458	407	366	306					
					FEED	94	105	138	146	149	150	148	148	153					



Global Cutting Tool Leader **YG-1**



MILLING