


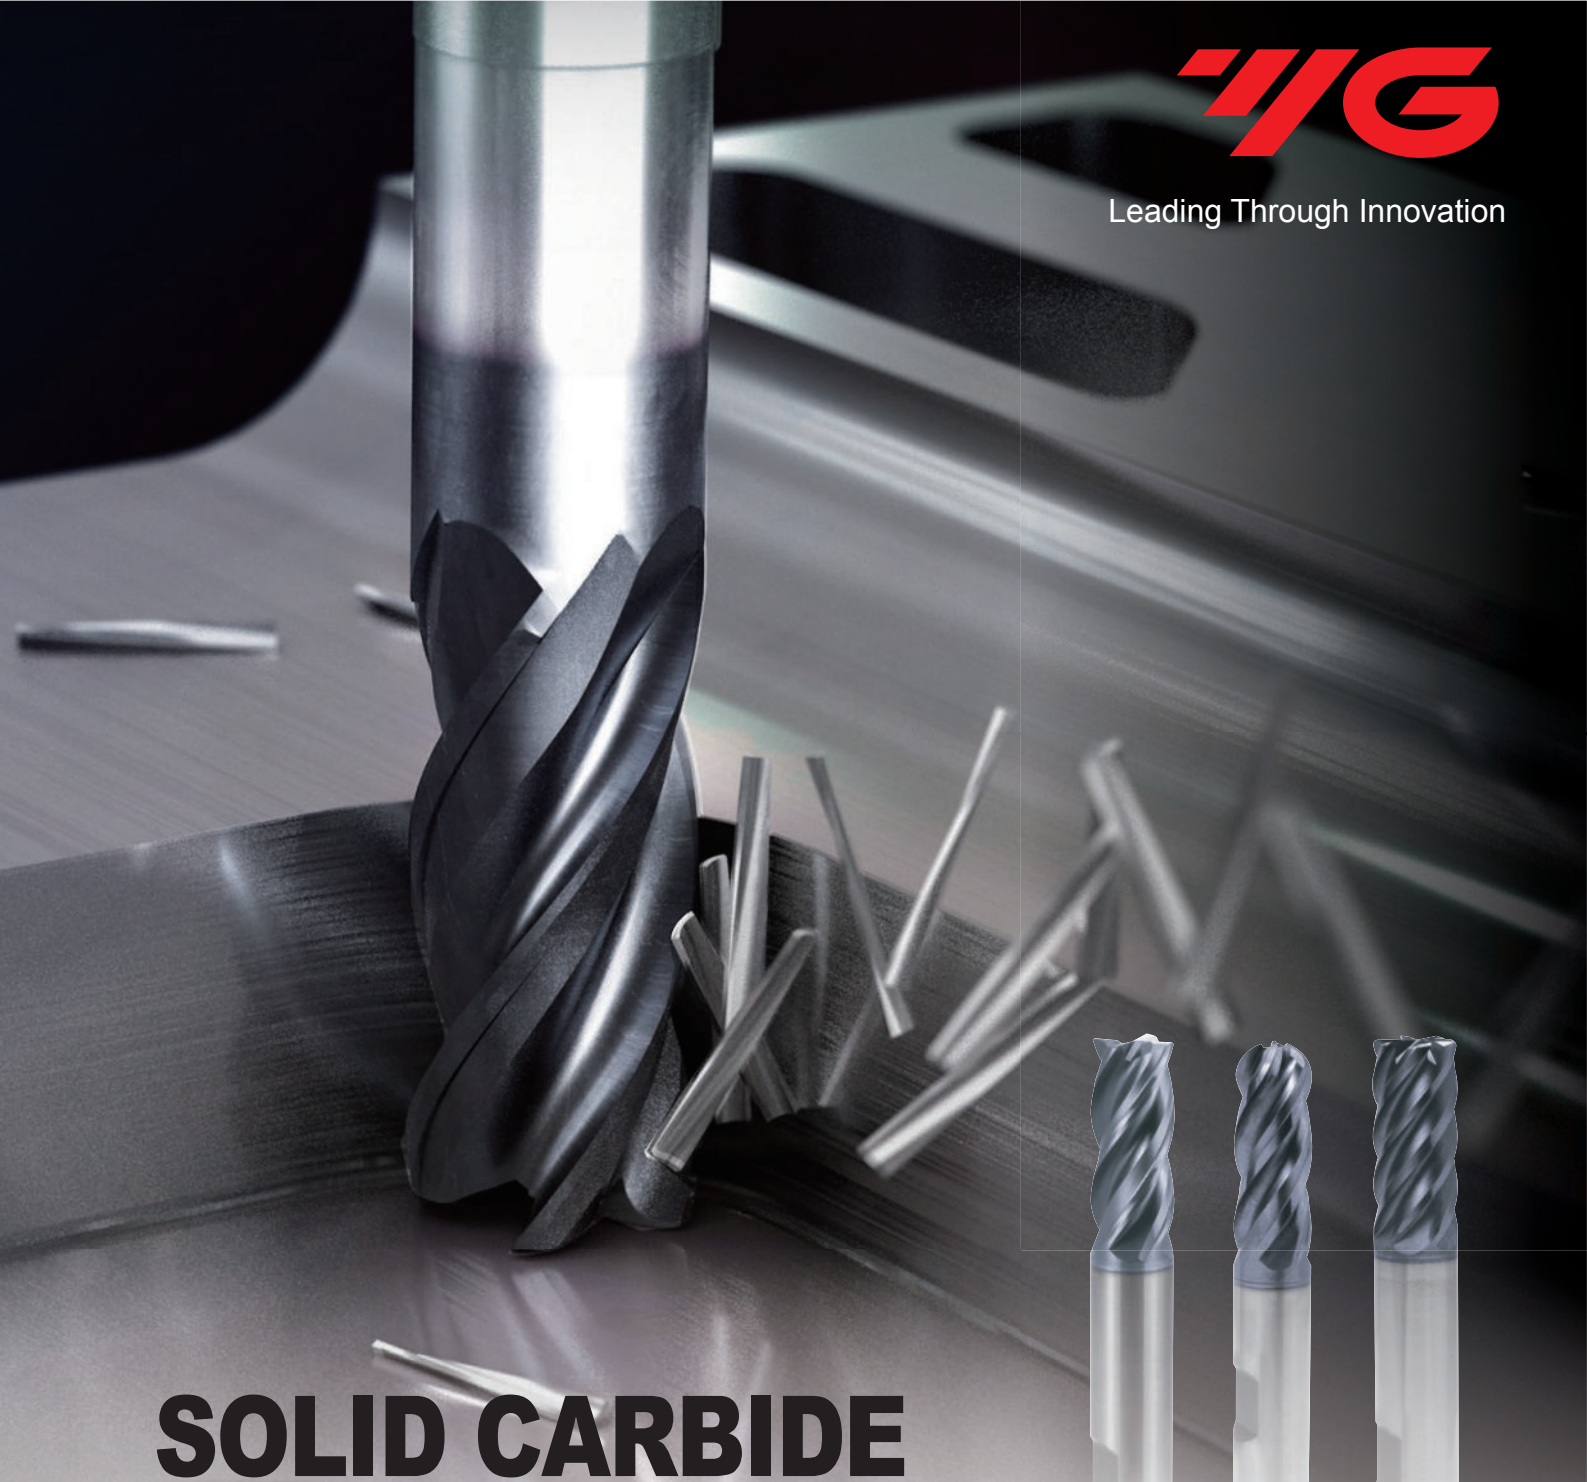

Leading Through Innovation

A large, detailed image of a solid carbide end mill in the foreground, with several other end mills of various sizes and designs blurred in the background. The end mills are shown in a dark, industrial setting.

SOLID CARBIDE

V7 PLUS END MILLS

V7 Plus VHM - Schaftfräser

- High Performance Carbide End Mills for Steels, Cast Iron and Stainless Steels
- Hochleistungs-VHM-Schaftfräser für Stähle, Gusseisen und rostfreie Stähle

CARBIDE

HSS

V7 PLUS

END MILLS

PLAIN SHANK

GMG55 SERIES

FLAT SHANK

GMG56 SERIES

CARBIDE, 4 FLUTE BALL NOSE LONG LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN STIRNRADIUS

CARBURE, 4 DENTS, HÉMISPHERIQUE

MD, 4 TAGLIENTI SEMISFERICA

►Special flute geometry and multiple helix eliminate vibrations

►Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

►Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen

►Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRC

CARBIDE

4

35°/37°

±0.02

PLAIN

FLAT

Y Coating

p.C482

EDP No.		Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
-	GMG56030	R1.5	3.0	6	8	57
GMG55040	GMG56040	R2.0	4.0	6	11	57
GMG55050	GMG56050	R2.5	5.0	6	13	57
GMG55060	GMG56060	R3.0	6.0	6	13	57
GMG55080	GMG56080	R4.0	8.0	8	19	63
GMG55100	GMG56100	R5.0	10.0	10	22	72
GMG55120	GMG56120	R6.0	12.0	12	26	83
GMG55160	GMG56160	R8.0	16.0	16	32	92
GMG55200	GMG56200	R10.0	20.0	20	38	104
-	GMG56250	R12.5	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend											○	○	○	○	○	○	○			

C464

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

CARBIDE

HSS

V7 PLUS

END MILLS

PLAIN SHANK

GMF54 SERIES

FLAT SHANK

GMF55 SERIES

CARBIDE, 4 FLUTE CORNER RADIUS SHORT LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS KURZ

CARBURE, 4 DENTS, SÉRIE COURTE, RAYONNÉE

MD, 4 TAGLIENTI SERIE CORTA TORICA

►Special flute geometry and multiple helix eliminate vibrations

►Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

►Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen

►Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRC

CARBIDE

4

35°/37°

PLAIN

FLAT

Y Coating

p.C483

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF54030	GMF55030	R0.3	3.0	6	7	54
GMF54901	GMF55901	R0.5	3.0	6	7	54
GMF54040	GMF55040	R0.3	4.0	6	8	54
GMF54902	GMF55902	R0.5	4.0	6	8	54
GMF54050	GMF55050	R0.3	5.0	6	10	54
GMF54903	GMF55903	R0.5	5.0	6	10	54
GMF54060	GMF55060	R0.3	6.0	6	10	54
GMF54904	GMF55904	R0.5	6.0	6	10	54
GMF54905	GMF55905	R1.0	6.0	6	10	54
-	GMF55080	R0.5	8.0	8	12	58
GMF54906	GMF55906	R1.0	8.0	8	12	58
GMF54100	GMF55100	R0.5	10.0	10	14	66
GMF54907	GMF55907	R1.0	10.0	10	14	66
GMF54120	GMF55120	R0.5	12.0	12	16	73
GMF54908	GMF55908	R1.0	12.0	12	16	73
GMF54909	GMF55909	R2.0	12.0	12	16	73
GMF54140	GMF55140	R0.5	14.0	14	18	75
GMF54160	GMF55160	R1.0	16.0	16	22	82
GMF54912	GMF55912	R2.0	16.0	16	22	82
GMF54913	GMF55913	R3.0	16.0	16	22	82
GMF54180	GMF55180	R1.0	18.0	18	24	84
GMF54200	GMF55200	R1.0	20.0	20	26	92
GMF54916	GMF55916	R2.0	20.0	20	26	92
GMF54917	GMF55917	R3.0	20.0	20	26	92

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend											○	○	○	○	○	○	○			

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

C465




PLAIN SHANK **GMF58** SERIES
FLAT SHANK **GMF59** SERIES

CARBIDE, 4 FLUTE CORNER RADIUS LONG LENGTH

● **VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS LANG**
● **CARBURE, 4 DENTS, SÉRIE LONGUE, RAYONNÉE**
● **MD, 4 TAGLIENTI SERIE LUNGA TORICA**

- ▶Special flute geometry and multiple helix eliminate vibrations
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drill verhindern Vibrationen
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRC

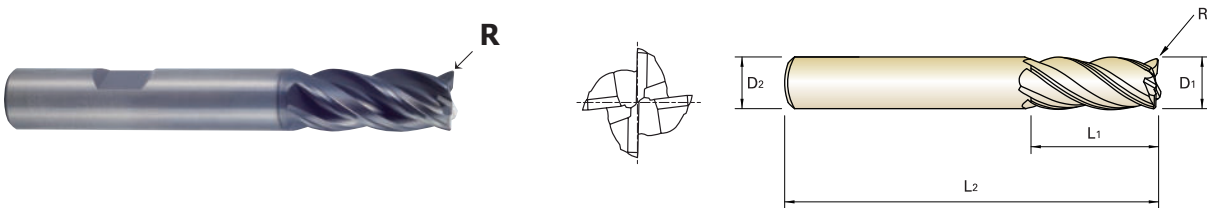

CARBIDE435°/37°PLAINFLATY Coatingp.C483

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF58030	GMF59030	R0.3	3.0	6	8	57
GMF58901	GMF59901	R0.5	3.0	6	8	57
GMF58040	GMF59040	R0.3	4.0	6	11	57
GMF58902	GMF59902	R0.5	4.0	6	11	57
GMF58050	GMF59050	R0.3	5.0	6	13	57
GMF58903	GMF59903	R0.5	5.0	6	13	57
GMF58060	GMF59060	R0.3	6.0	6	13	57
GMF58904	GMF59904	R0.5	6.0	6	13	57
GMF58905	GMF59905	R1.0	6.0	6	13	57
GMF58080	GMF59080	R0.5	8.0	8	19	63
GMF58906	GMF59906	R1.0	8.0	8	19	63
GMF58100	GMF59100	R0.5	10.0	10	22	72
GMF58907	GMF59907	R1.0	10.0	10	22	72
GMF58120	GMF59120	R0.5	12.0	12	26	83
GMF58908	-	R1.0	12.0	12	26	83
GMF58909	GMF59909	R2.0	12.0	12	26	83
GMF58140	GMF59140	R0.5	14.0	14	26	83
GMF58160	GMF59160	R1.0	16.0	16	32	92
GMF58912	GMF59912	R2.0	16.0	16	32	92
GMF58913	GMF59913	R3.0	16.0	16	32	92
GMF58180	GMF59180	R1.0	18.0	18	32	92
GMF58200	GMF59200	R1.0	20.0	20	38	104
GMF58916	GMF59916	R2.0	20.0	20	38	104
GMF58917	GMF59917	R3.0	20.0	20	38	104
GMF58250	GMF59250	R1.0	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34	36	37	55	60	42	41
HB											200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				




PLAIN SHANK **GMF62** SERIES
FLAT SHANK **GMF63** SERIES

CARBIDE, 4 FLUTE CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS mit ABGESETZTEM HALS**
● **CARBURE, 4 DENTS, DÉTALONNÉE, RAYONNÉE**
● **MD, 4 TAGLIENTI CON SCARICO ESTESO TORICA**

- ▶Special flute geometry and multiple helix eliminate vibrations
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drill verhindern Vibrationen
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRC

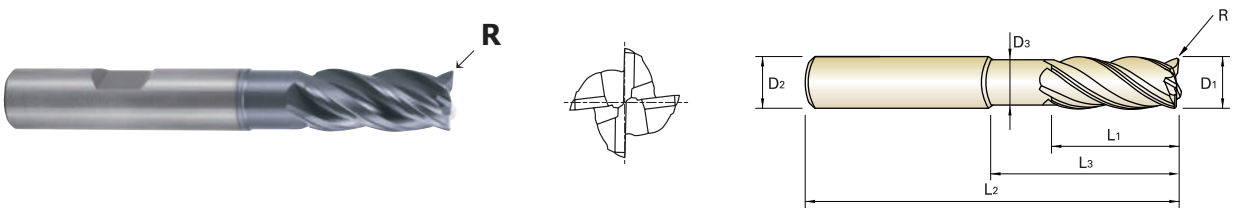

CARBIDE435°/37°PLAINFLATY Coatingp.C483

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62030	GMF63030	R0.3	3.0	6	7	12	54	2.7
-	GMF63901	R0.5	3.0	6	7	12	54	2.7
GMF62902	GMF63902	R0.3	3.0	6	7	17	57	2.7
GMF62903	GMF63903	R0.5	3.0	6	7	17	57	2.7
GMF62040	GMF63040	R0.3	4.0	6	8	15	57	3.7
GMF62904	GMF63904	R0.5	4.0	6	8	15	57	3.7
GMF62905	GMF63905	R0.3	4.0	6	8	22	63	3.7
GMF62906	GMF63906	R0.5	4.0	6	8	22	63	3.7
GMF62050	GMF63050	R0.3	5.0	6	10	17	57	4.7
GMF62907	GMF63907	R0.5	5.0	6	10	17	57	4.7
GMF62908	GMF63908	R0.3	5.0	6	10	27	67	4.7
GMF62909	GMF63909	R0.5	5.0	6	10	27	67	4.7
GMF62060	GMF63060	R0.3	6.0	6	10	15	57	5.5
GMF62910	GMF63910	R0.5	6.0	6	10	15	57	5.5
GMF62911	GMF63911	R1.0	6.0	6	10	15	57	5.5
GMF62912	GMF63912	R0.3	6.0	6	10	20	62	5.5
GMF62913	GMF63913	R0.5	6.0	6	10	20	62	5.5
GMF62914	GMF63914	R1.0	6.0	6	10	20	62	5.5
GMF62915	GMF63915	R0.3	6.0	6	10	32	74	5.5
-	GMF63916	R0.5	6.0	6	10	32	74	5.5
GMF62917	GMF63917	R1.0	6.0	6	10	32	74	5.5
GMF62080	GMF63080	R0.5	8.0	8	12	20	63	7.5
GMF62918	-	R1.0	8.0	8	12	20	63	7.5
GMF62919	GMF63919	R0.5	8.0	8	12	30	73	7.5

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N									S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

CARBIDE

HSS

V7 PLUS

END MILLS

PLAIN SHANK

GMF52 SERIES

FLAT SHANK

GMF53 SERIES

CARBIDE, 4 FLUTE SHORT LENGTH

 **VOLLHARTMETALL, 4 SCHNEIDEN KURZ**

 **CARBURE, 4 DENTS, SÉRIE COURTE**

 **MD, 4 TAGLIENTI SERIE CORTA**

►Special flute geometry and multiple helix eliminate vibrations

►Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

►Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen

►Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

CARBIDE

4

35°/37°

PLAIN

FLAT

C x 45°

Y Coating



p.C483

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF52030	GMF53030	3.0	6	7	54	0.10
GMF52040	GMF53040	4.0	6	8	54	0.15
GMF52050	GMF53050	5.0	6	10	54	0.15
GMF52060	-	6.0	6	10	54	0.20
GMF52080	GMF53080	8.0	8	12	58	0.20
GMF52100	GMF53100	10.0	10	14	66	0.30
GMF52120	GMF53120	12.0	12	16	73	0.35
GMF52140	GMF53140	14.0	14	18	75	0.40
GMF52160	GMF53160	16.0	16	22	82	0.40
-	GMF53180	18.0	18	24	84	0.50
GMF52200	GMF53200	20.0	20	26	92	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

ISO	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	240	200	240	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

C470

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

CARBIDE

HSS

V7 PLUS

END MILLS

PLAIN SHANK

GMF56 SERIES

FLAT SHANK

GMF57 SERIES

CARBIDE, 4 FLUTE LONG LENGTH

 **VOLLHARTMETALL, 4 SCHNEIDEN LANG**

 **CARBURE, 4 DENTS, SÉRIE LONGUE**

 **MD, 4 TAGLIENTI SERIE LUNGA**

►Special flute geometry and multiple helix eliminate vibrations

►Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

►Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen

►Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

CARBIDE

4

35°/37°

PLAIN

FLAT

C x 45°

Y Coating



p.C483

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF56030	GMF57030	3.0	6	8	57	0.10
GMF56040	GMF57040	4.0	6	11	57	0.15
GMF56050	GMF57050	5.0	6	13	57	0.15
GMF56060	GMF57060	6.0	6	13	57	0.20
GMF56080	GMF57080	8.0	8	19	63	0.20
GMF56100	GMF57100	10.0	10	22	72	0.30
GMF56120	GMF57120	12.0	12	26	83	0.35
GMF56140	GMF57140	14.0	14	26	83	0.40
GMF56160	GMF57160	16.0	16	32	92	0.40
GMF56180	GMF57180	18.0	18	32	92	0.50
GMF56200	GMF57200	20.0	20	38	104	0.50
GMF56250	GMF57250	25.0	25	38	104	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

ISO	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	240	200	240	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

C471




PLAIN SHANK **GMG16** SERIES
FLAT SHANK **GMG17** SERIES

CARBIDE, 6 FLUTE CORNER RADIUS LONG LENGTH

● **VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS LANG**
● **CARBURE, 6 DENTS, SÉRIE LONGUE, RAYONNÉE**
● **MD, 6 TAGLIENTI SERIE LUNGA TORICA**

- ▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

- ▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

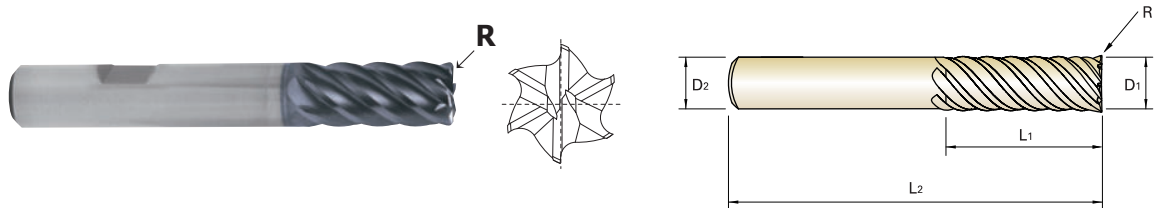

Unit : mm						
EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG16060	GMG17060	R0.5	6.0	6	13	57
GMG16901	GMG17901	R1.0	6.0	6	13	57
GMG16080	GMG17080	R0.5	8.0	8	19	63
GMG16902	GMG17902	R1.0	8.0	8	19	63
GMG16100	GMG17100	R0.5	10.0	10	22	72
GMG16903	GMG17903	R1.0	10.0	10	22	72
GMG16904	GMG17904	R1.5	10.0	10	22	72
GMG16905	GMG17905	R2.0	10.0	10	22	72
GMG16120	GMG17120	R0.5	12.0	12	26	83
GMG16906	GMG17906	R1.0	12.0	12	26	83
GMG16907	GMG17907	R1.5	12.0	12	26	83
GMG16908	GMG17908	R2.0	12.0	12	26	83
GMG16909	GMG17909	R3.0	12.0	12	26	83
GMG16160	GMG17160	R1.0	16.0	16	32	92
-	GMG17910	R1.5	16.0	16	32	92
GMG16911	GMG17911	R2.0	16.0	16	32	92
GMG16912	GMG17912	R3.0	16.0	16	32	92
GMG16200	GMG17200	R1.0	20.0	20	38	104
GMG16913	GMG17913	R1.5	20.0	20	38	104
GMG16914	GMG17914	R2.0	20.0	20	38	104
GMG16915	GMG17915	R3.0	20.0	20	38	104
GMG16250	GMG17250	R1.0	25.0	25	44	104
GMG16916	GMG17916	R1.5	25.0	25	44	104
GMG16917	GMG17917	R2.0	25.0	25	44	104
GMG16918	GMG17918	R3.0	25.0	25	44	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend											○	○	○	○	○	○	○	○	○	○




PLAIN SHANK **GMG18** SERIES
FLAT SHANK **GMG19** SERIES

CARBIDE, 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

● **VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS EXTRA LANG**
● **CARBURE, 6 DENTS, SÉRIE EXTRA-LONGUE, RAYONNÉE**
● **MD, 6 TAGLIENTI SERIE EXTRA LUNGA TORICA**

- ▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

- ▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

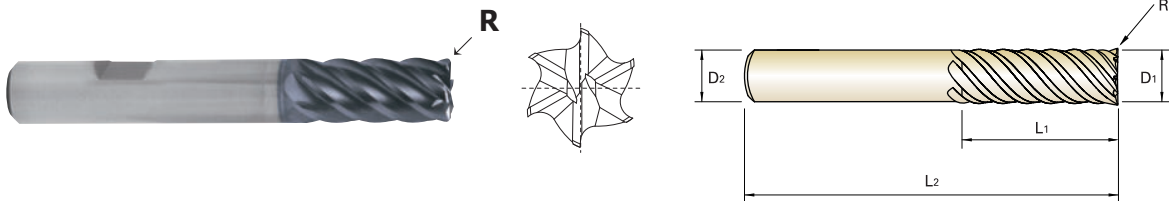

Unit : mm						
EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG18060	GMG19060	R0.5	6.0	6	24	75
-	GMG19901	R1.0	6.0	6	24	75
GMG18080	-	R0.5	8.0	8	32	75
-	GMG19902	R1.0	8.0	8	32	75
GMG18903	GMG19903	R2.0	8.0	8	32	75
GMG18100	GMG19100	R0.5	10.0	10	40	100
GMG18904	GMG19904	R1.0	10.0	10	40	100
GMG18905	GMG19905	R1.5	10.0	10	40	100
GMG18906	GMG19906	R2.0	10.0	10	40	100
GMG18120	GMG19120	R0.5	12.0	12	48	120
GMG18907	GMG19907	R1.0	12.0	12	48	120
GMG18908	GMG19908	R1.5	12.0	12	48	120
GMG18909	GMG19909	R2.0	12.0	12	48	120
GMG18910	GMG19910	R3.0	12.0	12	48	120
GMG18160	GMG19160	R1.0	16.0	16	64	140
GMG18911	GMG19911	R1.5	16.0	16	64	140
GMG18912	-	R2.0	16.0	16	64	140
GMG18913	GMG19913	R3.0	16.0	16	64	140
GMG18200	-	R1.0	20.0	20	80	150
GMG18914	GMG19914	R1.5	20.0	20	80	150
GMG18917	GMG19917	R4.0	20.0	20	80	150
GMG18918	GMG19918	R5.0	20.0	20	80	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend											○	○	○	○	○	○	○	○	○	○




PLAIN SHANK **GMG18** SERIES
FLAT SHANK **GMG19** SERIES

CARBIDE, 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

- VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS EXTRA LANG
- CARBURE, 6 DENTS, SÉRIE EXTRA-LONGUE, RAYONNÉE
- MD, 6 TAGLIENTI SERIE EXTRA LUNGA TORICA

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

- ▶ Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
- ▶ Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

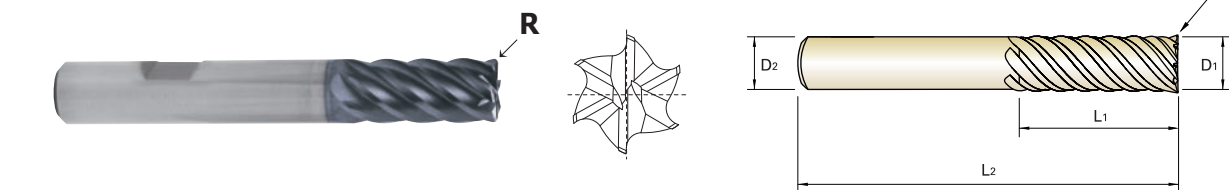

CARBIDE

6

45°

PLAIN

FLAT

Y Coating

p.C484

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG18250	-	R1.0	25.0	25	100	170
GMG18919	GMG19919	R1.5	25.0	25	100	170
GMG18922	GMG19922	R4.0	25.0	25	100	170
GMG18923	GMG19923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34	36		55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend											○	○	○	○	○	○	○						




PLAIN SHANK **GMH58** SERIES
FLAT SHANK **GMH59** SERIES

6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

- VOLLHARTMETALL, 6 SCHNEIDEN ECKRADIUS EXTRA LANG SPANTEILER
- CARBURE, 6 dents, extra-longue, fendeur des copeaux
- MD, 6 TAGLIENTI, TORICA, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO

- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶ High Performance for Steels, Stainless Steels and Cast Iron

- ▶ Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff
- ▶ Hohe Leistung bei der Bearbeitung von Stählen, rostfreien Stählen und Gusseisen.

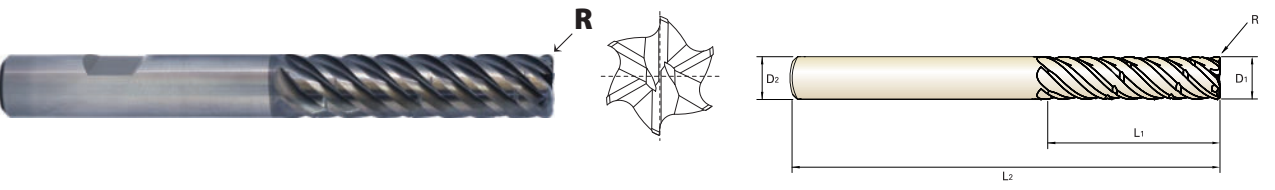

CARBIDE

6

45°

PLAIN

FLAT

Y Coating

p.C485

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMH58060	GMH59060	R0.5	6.0	6	24	75
GMH58901	GMH59901	R1.0	6.0	6	24	75
GMH58080	GMH59080	R0.5	8.0	8	32	75
GMH58902	GMH59902	R1.0	8.0	8	32	75
GMH58903	GMH59903	R2.0	8.0	8	32	75
GMH58100	GMH59100	R0.5	10.0	10	40	100
GMH58904	GMH59904	R1.0	10.0	10	40	100
GMH58905	GMH59905	R1.5	10.0	10	40	100
GMH58906	GMH59906	R2.0	10.0	10	40	100
GMH58120	GMH59120	R0.5	12.0	12	48	120
GMH58907	GMH59907	R1.0	12.0	12	48	120
GMH58908	GMH59908	R1.5	12.0	12	48	120
GMH58909	GMH59909	R2.0	12.0	12	48	120
GMH58910	GMH59910	R3.0	12.0	12	48	120
GMH58160	GMH59160	R1.0	16.0	16	64	140
GMH58911	GMH59911	R1.5	16.0	16	64	140
GMH58912	GMH59912	R2.0	16.0	16	64	140
GMH58913	GMH59913	R3.0	16.0	16	64	140
GMH58200	GMH59200	R1.0	20.0	20	80	150
GMH58914	GMH59914	R1.5	20.0	20	80	150
GMH58915	GMH59915	R2.0	20.0	20	80	150
GMH58916	GMH59916	R3.0	20.0	20	80	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend											○	○	○	○	○	○	○						




PLAIN SHANK **GMH58** SERIES
FLAT SHANK **GMH59** SERIES

6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

● **VOLLHARTMETALL, 6 SCHNEIDEN ECKRADIUS EXTRA LANG SPANTEILER**
● **CARBURE, 6 dents, extra-longue, fendeur des copeaux**
● **MD, 6 TAGLIENTI, TORICA, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO**

- ▶Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff
- ▶High Performance for Steels, Stainless Steels and Cast Iron
- ▶Hohe Leistung bei der Bearbeitung von Stählen, rostfreien Stählen und Gusseisen.

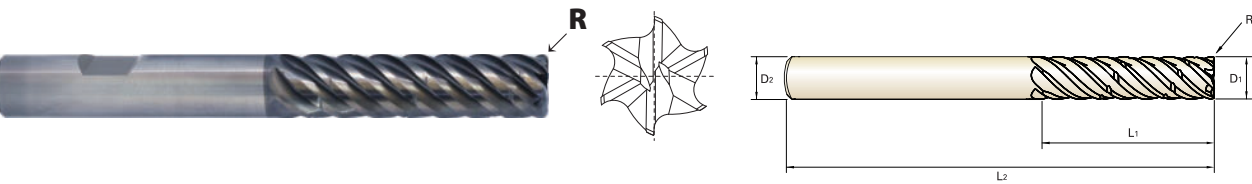

Unit : mm						
EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMH58917	GMH59917	R4.0	20.0	20	80	150
GMH58918	GMH59918	R5.0	20.0	20	80	150
GMH58250	GMH59250	R1.0	25.0	25	100	170
GMH58919	GMH59919	R1.5	25.0	25	100	170
GMH58920	GMH59920	R2.0	25.0	25	100	170
GMH58921	GMH59921	R3.0	25.0	25	100	170
GMH58922	GMH59922	R4.0	25.0	25	100	170
GMH58923	GMH59923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥Ø12 : h6

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend											○	○	○	○	○	○	○	○	○	○




PLAIN SHANK **GMG12** SERIES **GMG14** SERIES
FLAT SHANK **GMG13** SERIES **GMG15** SERIES

CARBIDE, 6 FLUTE LONG/EXTRA LONG LENGTH


● **VOLLHARTMETALL, 6 SCHNEIDEN, LANG/EXTRA LANG**
● **CARBURE, 6 DENTS, SÉRIE --LONGUE/EXTRA-LONGUE**
● **MD, 6 TAGLIENTI SERIE LUNGA /EXTRA LUNGA**

- ▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40
- ▶Exzellente Leistung in Edelfstählen, Baustählen, Guss und Stählen unter 40HRc

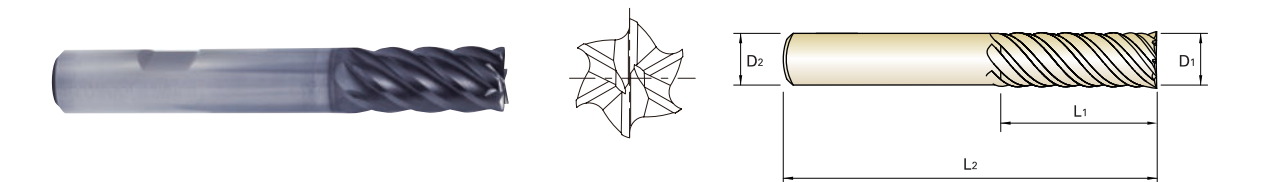


Unit : mm					
EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMG12060	GMG13060	6.0	6	13	57
GMG12080	GMG13080	8.0	8	19	63
GMG12100	GMG13100	10.0	10	22	72
GMG12120	GMG13120	12.0	12	26	83
GMG12160	GMG13160	16.0	16	32	92
GMG12200	GMG13200	20.0	20	38	104
GMG12250	GMG13250	25.0	25	44	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02 h5
Over Ø12	0 ~ - 0.03 * Shank Dia. ≥Ø12 : h6



Unit : mm					
EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMG14060	GMG15060	6.0	6	24	75
GMG14080	GMG15080	8.0	8	32	75
GMG14100	GMG15100	10.0	10	40	100
GMG14120	GMG15120	12.0	12	48	120
GMG14160	GMG15160	16.0	16	64	140
GMG14200	GMG15200	20.0	20	80	150
GMG14250	GMG15250	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥Ø12 : h6



ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend											○	○	○	○	○	○	○	○	○	○



PLAIN SHANK	GMH56 SERIES
FLAT SHANK	GMH57 SERIES


CARBIDE, 6 FLUTE EXTRA LONG LENGTH CHIP SPLITTER

- VOLLHARTMETALL, 6-SCHNEIDEN-SPANTEILER MIT EXTRA LANGER LÄNGE
- 🇫🇷 Carbure, 6 Dents, Torique, Extra-Longue, Fendeur Des Copeaux
- 🇮🇹 MD, 6 TAGLIENTI, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO

- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining

▶ High Performance for Steels, Stainless Steels and Cast Iron
- ▶ Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff

▶ Hohe Leistung bei der Bearbeitung von Stählen, rostfreien Stählen und Gusseisen.

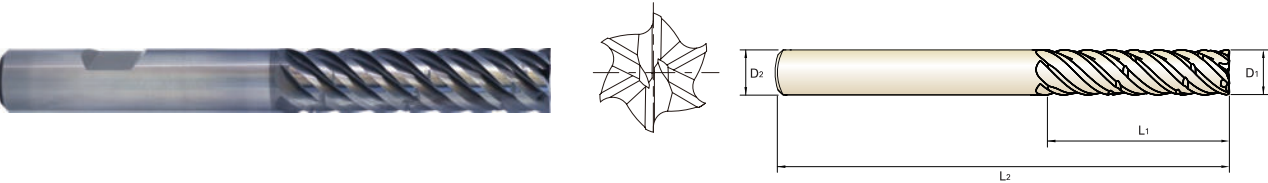

CARBIDE

6

45°

PLAIN


FLAT

Y Coating

p.C485

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMH56060	-	6.0	6	24	75
GMH56080	GMH57080	8.0	8	32	75
GMH56100	GMH57100	10.0	10	40	100
-	GMH57120	12.0	12	48	120
GMH56160	GMH57160	16.0	16	64	140
-	GMH57200	20.0	20	80	150
GMH56250	GMH57250	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6



◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend											○	○	○	○	○	○	○						



PLAIN SHANK	EMB72 SERIES
FLAT SHANK	EMB73 SERIES

CARBIDE, 5 FLUTE LONG LENGTH

- VOLLHARTMETALL, 5 SCHNEIDEN LANG
- 🇫🇷 Fraise carbure, 5 dents, longue
- 🇮🇹 5 TAGLIENTI, SERIE LUNGA, EVOLVENTE VARIABILE

- ▶ Special flute geometry eliminates vibrations

▶ Designed for mild steels, stainless steels, cast iron, tool steels, titanium alloys, prehardened steels and low hardness materials under HRc40

▶ Excellent finished work piece

▶ Higher speeds, deeper cuts and excellent metal removal rates
- ▶ Spezielle Schneidengeometrie verhindert Vibrationen

▶ Geeignet für Baustähle, Rostfreie Stähle, Grauguss, Werkzeugstähle, Titanlegierungen, hochfeste Stähle und Werkstoffe unter 40 HRc

▶ Bessere Werkstückoberflächen.

▶ Höhere Schnittgeschwindigkeiten, größere Profiltiefe und größeres Zerspanungsvolumen



CARBIDE

5

Sinusoidal

PLAIN

FLAT


C x 45°

AlTiN

p.C486

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT					
EMB72060	EMB73060	6.0	6	13	57	0.1
EMB72080	EMB73080	8.0	8	19	63	0.1
EMB72100	EMB73100	10.0	10	22	72	0.1
EMB72120	-	12.0	12	26	83	0.1
EMB72140	EMB73140	14.0	14	26	83	0.2
EMB72160	EMB73160	16.0	16	32	92	0.2
EMB72180	EMB73180	18.0	18	32	92	0.2
EMB72200	-	20.0	20	38	104	0.2
EMB72250	EMB73250	25.0	25	38	104	0.2

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6



																			◎ : Excellent ○ : Good			
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	○		○	◎		○		○	○	◎	◎	◎		○		○		○		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend											○		○		○		◎					

CARBIDE

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X1-EH END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

V7 PLUS

END MILLS

RECOMMENDED CUTTING CONDITIONS

EMPFOHLENE SCHNEIDPARAMETER

GMG55, GMG56 SERIES

4 FLUTE BALL NOSE

ISO

VDI 3323

Material Description

Ae

Ap

Parameter

3.0

4.0

5.0

6.0

8.0

10.0

12.0

16.0

18.0

20.0

25.0

P

1-4

Non-alloy steel

0.5D

1.0D

Vc

fz

RPM

FEED

5

Low alloy steel

0.5D

1.0D

Vc

fz

RPM

FEED

6-7

0.5D

1.0D

Vc

fz

RPM

FEED

8-9

0.5D

1.0D

Vc

fz

RPM

FEED

10-11.1

High alloyed steel, and tool steel

0.5D

1.0D

Vc

fz

RPM

FEED

M

12-13

Stainless steel

0.5D

1.0D

Vc

fz

RPM

FEED

14.1

0.5D

1.0D

Vc

fz

RPM

FEED

14.2

0.5D

1.0D

Vc

fz

RPM

FEED

K

15-20

Grey cast iron

0.5D

1.0D

Vc

fz

RPM

FEED

31-35

Heat Resistant Super Alloys

0.2D

0.3D

Vc

fz

RPM

FEED

36-37

Titanium Alloys

0.5D

0.3D

Vc

fz

RPM

FEED

Vc = m/min.

fz = mm/tooth

RPM = rev./min.

FEED = mm/min.

Ap

Ae

C482

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

CARBIDE

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X1-EH END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

V7 PLUS

END MILLS

RECOMMENDED CUTTING CONDITIONS

EMPFOHLENE SCHNEIDPARAMETER

GMF52, GMF53, GMF54, GMF55, GMF56, GMF57, GMF58, GMF59, GMF60, GMF61, GMF62, GMF63

4 FLUTE - SIDE & SLOTTING

ISO

VDI 3323

Material Description

Ae

Ap

Parameter

3.0

4.0

5.0

6.0

8.0

10.0

12.0

14.0

16.0

18.0

20.0

25.0

P

1-4

Non-alloy steel

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

5

Low alloy steel

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

6-7

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

8-9

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

10-11.1

High alloyed steel, and tool steel

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

M

12-13

Stainless steel

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

14.1

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

14.2

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

K

15-20

Grey cast iron

0.5D

1.0D

1.5D (1.2D)

1.0D (0.8D)

Vc

fz

RPM

FEED

31-35

Heat Resistant Super Alloys

0.25D

1.0D

1.0D

0.5D

Vc

fz

RPM

FEED

36-37

Titanium Alloys

0.4D

1.0D

1.0D

0.5D

Vc

fz

RPM

FEED

Vc = m/min.

fz = mm/tooth

RPM = rev./min.

FEED = mm/min.

Ap(*)

Ae

Ap(*)

Ae

*() : Short length & Neck type

C483

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GMG16
GMG17

GMG18
GMG19

GMG12
GMG13


GMG14
GMG15

6 FLUTE - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5		0.05D	2.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7	Low alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9		0.05D	2.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13		0.05D	2.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1	Stainless steel	0.05D	2.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2		0.05D	2.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	2.0D	Vc	225	225	225	225	225	225	225
S	31-35	Heat Resistant Super Alloys	0.05D	2.0D	fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
					Vc	35	35	35	35	35	35	35
	36-37	Titanium Alloys	0.05D	2.0D	fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
					Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028

(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied with L.O.C x 90%



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GMH58
GMH59

GMH56
GMH57

6 FLUTE CHIP SPLITTER - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5		0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7	Low alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9		0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	3.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13		0.05D	3.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1	Stainless steel	0.05D	3.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2		0.05D	3.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	3.0D	Vc	225	225	225	225	225	225	225
S	31-35	Heat Resistant Super Alloys	0.05D	3.0D	fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
					Vc	35	35	35	35	35	35	35
	36-37	Titanium Alloys	0.05D	3.0D	fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
					Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028

(*) : If product's Length of Cut(L.O.C) is below 2D, it



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

EMB72, EMB73 SERIES

5 FLUTE - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1-2	Non-alloy steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	6		0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	10	High alloyed steel, and tool steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
M	12-13	Stainless steel	0.25D	1.25D	Vc	105	105	105	145	105	105	105
					fz	0.030	0.032	0.038	0.043	0.064	0.068	0.076
					RPM	5570	4178	3342	3846	2387	2089	1671
					FEED	836	668	635	827	764	710	635
	14.1		0.25D	1.25D	Vc	115	115	115	115	115	115	115
					fz	0.030	0.032	0.038	0.063	0.065	0.069	0.076
					RPM	6101	4576	3661	3050	2615	2288	1830
					FEED	915	732	696	961	850	789	696
K	15-20	Grey cast iron	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
S	31-35	Heat Resistant Super Alloys	0.25D	1.0D	Vc	25	25	25	25	25	25	25
					fz	0.017	0.020	0.025	0.036	0.045	0.048	0.060
					RPM	1326	995	796	663	568	497	398
					FEED	113	99	99	119	128	119	119
	36-37	Titanium Alloys	0.25D	1.25D	Vc	85	85	85	85	85	85	85
					fz	0.030	0.031	0.038	0.050	0.057	0.063	0.075
					RPM	4509	3382	2706	2255	1933	1691	1353
					FEED	676	524	514	564	551	533	507

