

YE-PT25

EUROPE



TAP *PRIME*

HSS-PM(Powder Metallurgy) Premium Taps

- Spiral Point, Spiral Flute, and Forming Taps for CNC Machines
- High and Reliable Performance in Various Ductile Materials

NEW PORTFOLIO!

EXPANSION Spiral Point, Spiral Flute Cutting Tap

NEW Short Chamfer Cutting Tap


NEW Forming Tap

NEW with Internal Coolant




Prime X-Coated Tap for CNC Machining in Various Ductile Materials

The special grinding process provides a unique geometry for spiral flute and spiral point taps to optimize chip evacuation, while Forming Taps form threads through material displacement without chip evacuation, resulting in stronger threads and improved surface finish.

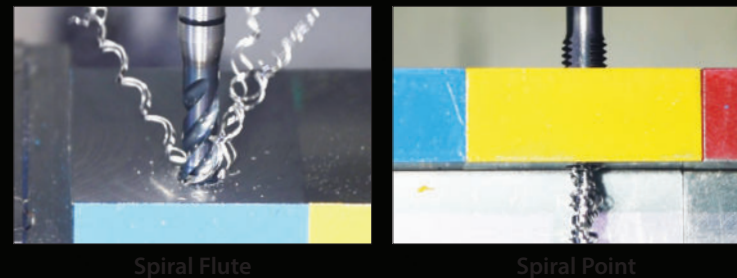


FEATURES & BENEFITS

High and Reliable Performance on Various Ductile Materials

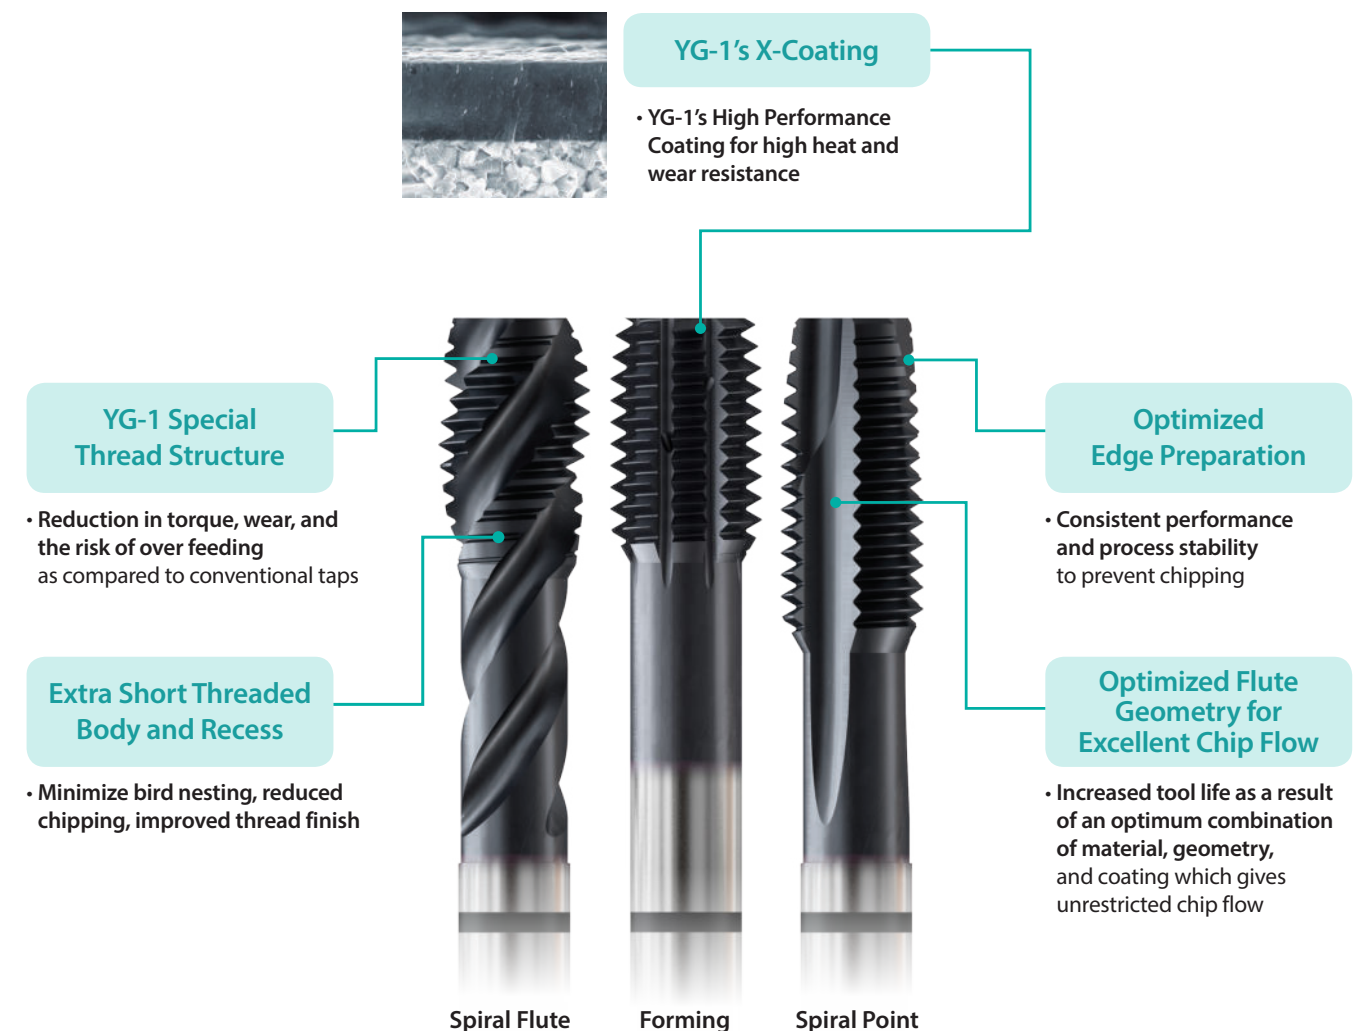

HSS-PM(Powder Metallurgy) Premium Taps

Powdered Metal Technology for a tough-chipping resistant cutting edge for long tool life and reliable thread finish



Premium Cutting Edge Strength


- More controlled structure with high wear resistance
- Consistent performance and process stability with chipping resistance

GUIDE TO ICONS


Working Material



Surface Treatment



Tool Raw Material



Helix Angle



Thread Angle



Cutting Condition



Standard of Tools



Number of DIN Standard

Class of Thread



Chamfer Lead



Form B (with Spiral Point and Chamfer Lead 4-5 Thread)



Form C (Chamfer Lead 2-3 Thread)



Form E (Chamfer Lead 1.5-2 Thread)

CASE STUDY


TEST I FORMING TAP (M6x1.0)

Cutting Condition


Tool	Forming Tap
Size	M6x1.0
Work Material	- JIS: SCM440(HRC35) - DIN: 42CrMo4 - WR: 1.7225
RPM	530 rev./min.
Vc	10 m/min.

Feed	1.0 mm/rev.
Tap Drill Size	Ø5.5 mm
Tapping Depth	12 mm
Tapping Holes	1,000
Machine	Machining Center (Horizontal)

RESULT 1

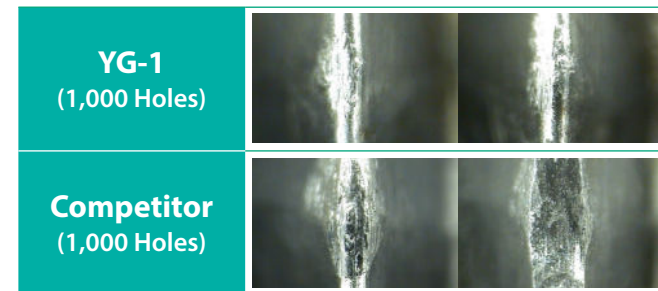



RESULT 2

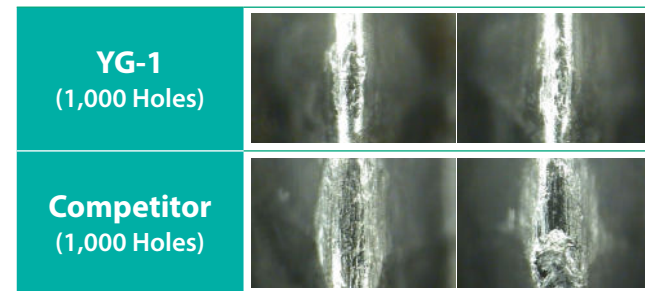

TEST II SPIRAL FLUTE TAP (M4x0.7)

Cutting Condition

Tool	Spiral Flute Tap
Size	M4x0.7
Work Material	- JIS: SCM440(HRC30) - DIN: 42CrMo4 - WR: 1.7225
RPM	2,387 rev./min.
Vc	30 m/min.
Feed	0.7 mm/rev.
Tap Drill Size	Ø3.3 mm
Tapping Depth	8 mm
Tapping Holes	580
Coolant	Wet Cut

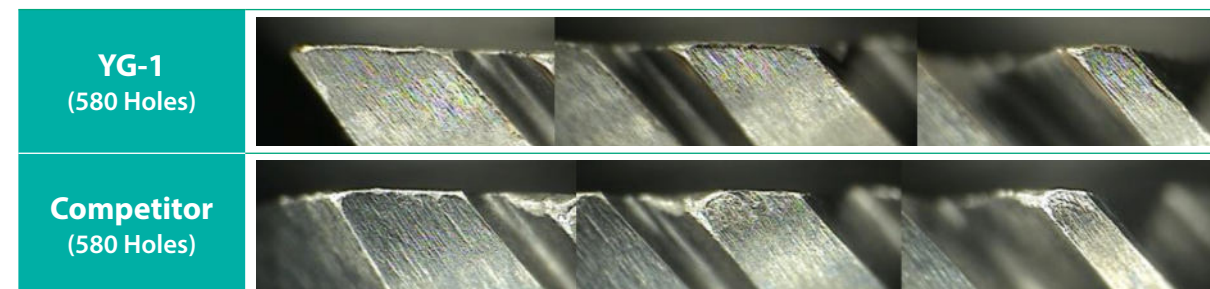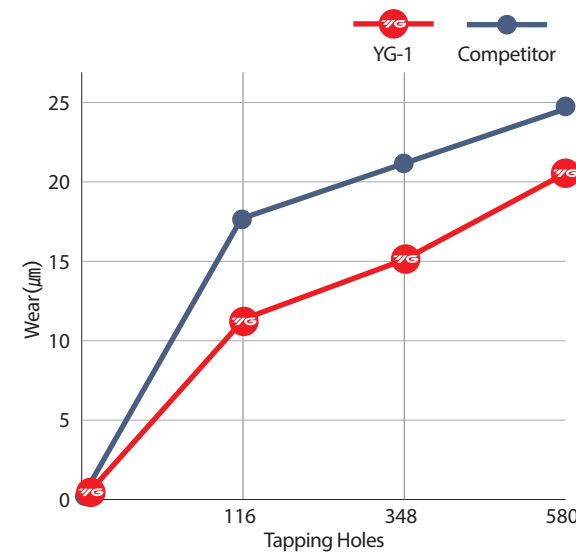


CASE STUDY

TEST III SPIRAL FLUTE TAP (M6x1.0)

Cutting Condition

Tool	Spiral Flute Tap
Size	M6x1.0
Work Material	- JIS: SUS304 - DIN: X16CrNi1810 - WR: 1.4350
RPM	531 rev./min.
Vc	10 m/min.
Feed	531 mm/min.
Tap Drill Size	5.1 mm
Tapping Depth	12 mm
Tapping Holes	YG-1: 1,000+α / Competitor: 593
Coolant	Wet Cut

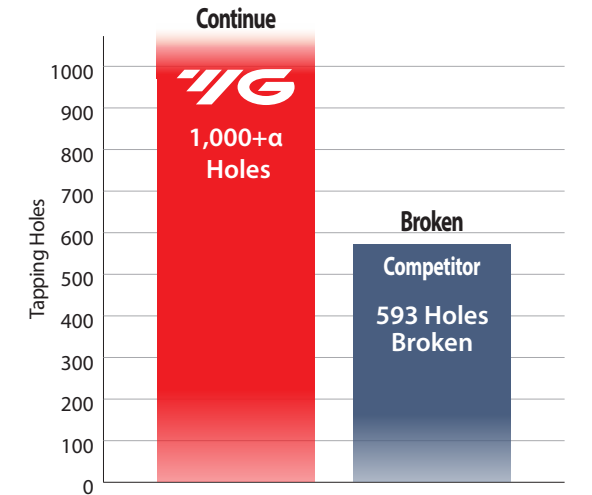

YG Prime Taps (1,000+α Holes)



Competitor (593 Holes, Broken)




TEST IV SPIRAL FLUTE TAP (M8x1.25)

Cutting Condition

Tool	Spiral Flute Tap
Size	M8x1.25
Work Material	- JIS: S45C - DIN: CK45 - WR: 1.1191
RPM	796 rev./min.
Vc	20 m/min.
Feed	995 mm/min.
Tap Drill Size	6.8 mm
Tapping Depth	17 mm
Tapping Holes	YG-1: 1,350+α / Competitor: 1,350+α
Coolant	Wet Cut




Comparison of Wear Resistance

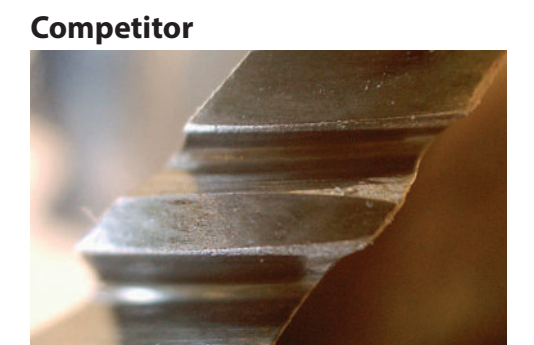



◎: Excellent ○: Good

6 **YG-1 CO., LTD.** · Phone: +82-32-526-0909, www.yg1.solutions E-mail: yg1@yg1.solutions

· Phone: +82-32-526-0909, www.yg1.solutions E-mail: yg1@yg1.solutions  **YG-1 CO., LTD.** **7**

HSS-PM PRIME TAP



© : Excellent ○ : Good


ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	Recommended cutting conditions Vc (m/min.)					
P	1	Non-alloy steel	About 0.15% C	Annealed	125	13	○ (5-25)	○ (5-25)	◎ (15-50)	◎ (15-45)	◎ (15-45)
	2		About 0.45% C	Annealed	190	13	◎ (10-55)	◎ (10-55)	◎ (10-60)	◎ (15-35)	◎ (15-35)
	3		About 0.45% C	Quenched & tempered	250	25	◎ (10-55)	◎ (10-55)	◎ (10-60)	◎ (15-35)	◎ (15-35)
	4		About 0.75% C	Annealed	270	28	◎ (15-45)	◎ (15-45)	◎ (15-55)	◎ (15-35)	◎ (15-35)
	5		About 0.75% C	Quenched & tempered	300	32	◎ (15-45)	◎ (15-45)	◎ (15-55)	◎ (15-35)	◎ (15-35)
	6	Low alloy steel		Annealed	180	10	◎ (8-35)	◎ (8-35)	◎ (8-35)	◎ (15-35)	◎ (15-35)
	7			Quenched & tempered	275	29	◎ (8-35)	◎ (8-35)	◎ (8-35)	◎ (15-35)	◎ (15-35)
	8			Quenched & tempered	300	32	◎ (8-35)	◎ (8-35)	◎ (8-35)	◎ (5-22)	◎ (5-22)
	9			Quenched & tempered	350	38	○ (8-35)	○ (8-35)	◎ (8-35)	◎ (5-22)	◎ (5-22)
	10			Annealed	200	15	○ (8-35)	○ (8-35)	○ (8-35)	◎ (5-17)	◎ (5-17)
	11			Quenched & Tempered	325	35	○ (8-35)	○ (8-35)	○ (8-35)	◎ (5-17)	◎ (5-17)
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎ (5-17)	◎ (5-17)	◎ (8-25)	◎ (5-17)	◎ (5-17)
	13		Martensitic	Quenched & Tempered	240	23	◎ (5-17)	◎ (5-17)	◎ (8-25)	◎ (5-17)	◎ (5-17)
	14		Austenitic		180	10	◎ (5-17)	◎ (5-17)	◎ (8-25)	◎ (3-10)	◎ (3-10)
	15	Grey cast iron	Pearlitic / ferritic		180	10	○ (15-40)	○ (15-40)	◎ (15-40)		
K	16	Nodular cast iron	Pearlitic (Martensitic)		260	26	○ (15-40)	○ (15-40)	◎ (15-40)		
	17		Ferritic		160	3	◎ (15-40)	◎ (15-40)	◎ (15-40)		
	18		Pearlitic		250	25	◎ (15-40)	◎ (15-40)	◎ (15-40)		
	19	Malleable cast iron	Ferritic		130						
	20		Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable		60		○ (15-40)	○ (15-40)	○ (15-40)	◎ (20-55)	◎ (20-55)
	22		Curable	Hardened	100		○ (15-40)	○ (15-40)	○ (15-40)	◎ (20-55)	◎ (20-55)
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		◎ (15-40)	◎ (15-40)	◎ (15-40)	◎ (20-45)	◎ (20-45)
	24		≤ 12% Si, Curable	Hardened	90		◎ (15-40)	◎ (15-40)	◎ (15-40)	◎ (20-45)	◎ (20-45)
	25		> 12% Si, Not Curable		130		○ (15-40)	○ (15-40)	○ (15-40)	◎ (20-45)	◎ (20-45)
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		◎ (15-40)	◎ (15-40)	◎ (15-40)	◎ (10-35)	◎ (10-35)
	27		CuZn, CuSnZn (Brass)		90		◎ (15-40)	◎ (15-40)	◎ (15-40)	◎ (10-35)	◎ (10-35)
	28		CuSn, lead-free copper and electrolytic copper		100		◎ (15-40)	◎ (15-40)	◎ (15-40)	◎ (10-35)	◎ (10-35)
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic								
	30		Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33		Ni or Co Based	Annealed	250	25					
	34			Cured	350	38					
	35			Cast	320	34					
	36	Titanium Alloys	Pure Titanium		400 Rm						
H	37		Alpha + Beta Alloys	Hardened	1050 Rm						
	38	Hardened steel		Hardened	550	55					
	39			Hardened	630	60					
	40	Chilled Cast Iron	Cast		400	42					
	41	Hardened Cast Iron	Hardened		550	55					

M X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

SERIES

TRE30

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

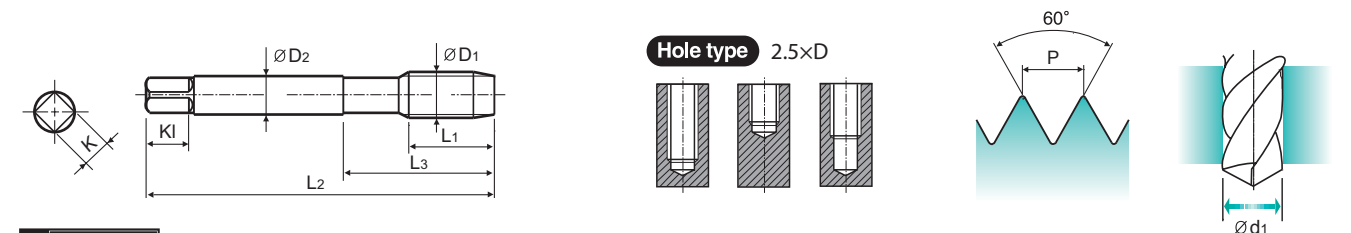

Machine Taps

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M2	x 0.4	TRE30136GS	3.2	45	13	2.8	2.1	5	2	1.6
M2.5	x 0.45	TRE30176GS	3.6	50	15	2.8	2.1	5	2	2.1
M3	x 0.5	TRE30206GS	4	56	18	3.5	2.7	6	3	2.5
M3.5	x 0.6	TRE30226GS	4.8	56	20	4	3	6	3	2.9
M4	x 0.7	TRE30246GS	5.6	63	21	4.5	3.4	6	3	3.3
M5	x 0.8	TRE30286GS	6.4	70	25	6	4.9	8	3	4.2
M6	x 1.0	TRE30316GS	8	80	30	6	4.9	8	3	5
M7	x 1.0	TRE30346GS	10	80	30	7	5.5	8	3	6
M8	x 1.25	TRE30366GS	13	90	35	8	6.2	9	3	6.8
M9	x 1.25	TRE30396GS	13	90	35	9	7	10	3	7.8
M10	x 1.5	TRE30426GS	15	100	39	10	8	11	3	8.5
M12	x 1.75	TRE30506GS	18	110	44	9	7	10	3	10.3
M14	x 2.0	TRE30546GS	20	110	44	11	9	12	3	12
M16	x 2.0	TRE30606GS	20	110	44	12	9	12	3	14
M18	x 2.5	TRE30656GS	25	125	50	14	11	14	4	15.5
M20	x 2.5	TRE30706GS	25	140	54	16	12	15	4	17.5
M22	x 2.5	TRE30746GS	25	140	54	18	14.5	17	4	19.5
M24	x 3.0	TRE30786GS	30	160	60	18	14.5	17	4	21

► DIN 371(M2~M10) and DIN 376(M12~M24)

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎		
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	○	○	◎	◎	○	◎	◎	◎												




M X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRE35



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

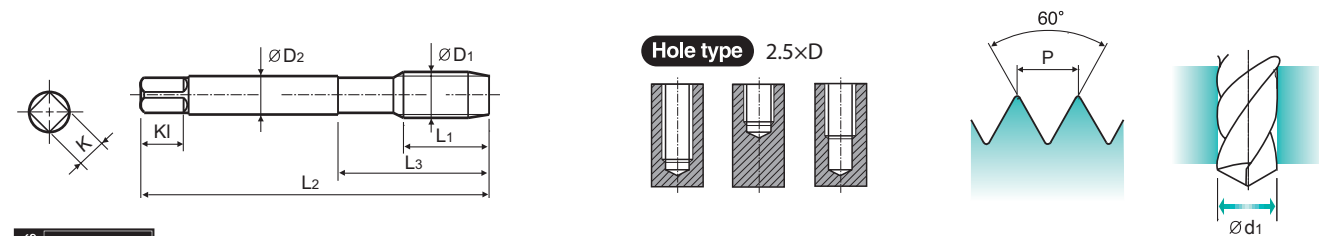

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M2	x 0.4	TRE35136GS	3.2	45	13	2.8	2.1	5	2	1.6
M3	x 0.5	TRE35206GS	4	56	18	3.5	2.7	6	3	2.5
M4	x 0.7	TRE35246GS	5.6	63	21	4.5	3.4	6	3	3.3
M5	x 0.8	TRE35286GS	6.4	70	25	6	4.9	8	3	4.2
M6	x 1.0	TRE35316GS	8	80	30	6	4.9	8	3	5
M8	x 1.25	TRE35366GS	13	90	35	8	6.2	9	3	6.75
M10	x 1.5	TRE35426GS	15	100	39	10	8	11	3	8.5
M12	x 1.75	TRE35506GS	18	110	44	9	7	9.8	3	10.25
M14	x 2.0	TRE35546GS	20	110	52	11	9	11.8	3	12
M16	x 2.0	TRE35606GS	20	110	52	12	9	11.8	3	14

► DIN 371(M2~M10) and DIN 376(M12~M16)

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	○	○	○	◎	◎	◎	○	○	◎	◎			
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	◎	◎	○	◎	◎	◎													



M X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13



SERIES

TRE34



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

Short Chamfer

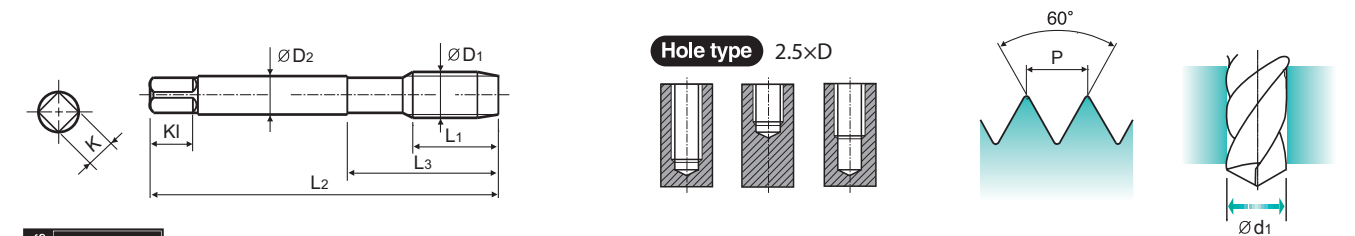

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M2	x 0.4	TRE34136GS	3.2	45	13	2.8	2.1	5	2	1.6
M3	x 0.5	TRE34206GS	4	56	18	3.5	2.7	6	3	2.5
M4	x 0.7	TRE34246GS	5.6	63	21	4.5	3.4	6	3	3.3
M5	x 0.8	TRE34286GS	6.4	70	25	6	4.9	8	3	4.2
M6	x 1.0	TRE34316GS	8	80	30	6	4.9	8	3	5
M8	x 1.25	TRE34366GS	13	90	35	8	6.2	9	3	6.8
M10	x 1.5	TRE34426GS	15	100	39	10	8	11	3	8.5
M12	x 1.75	TRE34506GS	18	110	44	9	7	10	3	10.3
M14	x 2.0	TRE34546GS	20	110	44	11	9	12	3	12
M16	x 2.0	TRE34606GS	20	110	44	12	9	12	3	14
M20	x 2.5	TRE34706GS	25	140	54	16	12	15	4	17.5

► DIN 371(M2~M10) and DIN 376(M12~M20)

◎ : Excellent ○ : Good																					
ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎			
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	◎	◎	○	◎	◎	◎													




MF X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

SERIES

TRE31

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

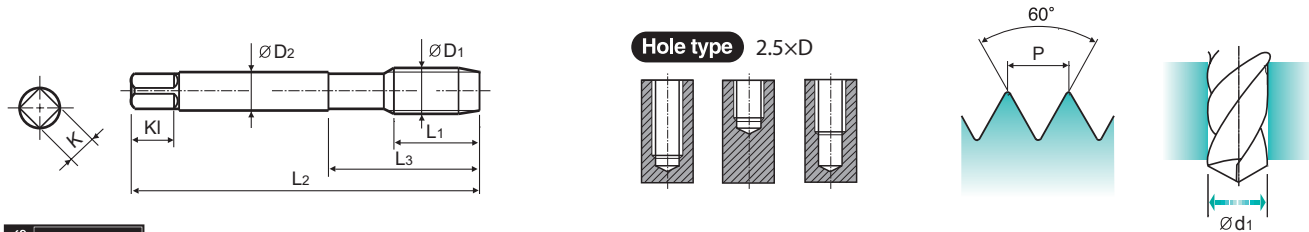

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M4	x 0.5	TRE31256GS	5.6	63	21	2.8	2.1	5	3	3.5
M4	x 0.35	TRE31696GS	5.6	63	21	2.8	2.1	5	3	3.7
M5	x 0.5	TRE31296GS	6.4	70	25	3.5	2.7	6	3	4.5
M6	x 0.75	TRE31326GS	8	80	30	4.5	3.4	6	3	5.3
M6	x 0.5	TRE31336GS	8	80	30	4.5	3.4	6	3	5.5
M8	x 1.0	TRE31376GS	10	90	36	6	4.9	8	3	7
M8	x 0.75	TRE31386GS	10	80	30	6	4.9	8	3	7.3
M9	x 1.0	TRE31406GS	10	90	36	7	5.5	8	3	8
M9	x 0.75	TRE31416GS	10	80	30	7	5.5	8	3	8.3
M10	x 1.25	TRE31436GS	13	100	40	7	5.5	8	3	8.8
M10	x 1.0	TRE31446GS	10	90	36	7	5.5	8	3	9
M10	x 0.75	TRE31456GS	10	90	36	7	5.5	8	3	9.3
M12	x 1.5	TRE31516GS	15	100	40	9	7	10	3	10.5
M12	x 1.25	TRE31526GS	15	100	40	9	7	10	3	10.8
M12	x 1.0	TRE31536GS	15	100	40	9	7	10	3	11
M14	x 1.5	TRE31556GS	15	100	40	11	9	12	3	12.5
M14	x 1.25	TRE31566GS	15	100	40	11	9	12	3	12.8
M14	x 1.0	TRE31576GS	15	100	40	11	9	12	3	13
M16	x 1.5	TRE31616GS	15	100	40	12	9	12	3	14.5
M16	x 1.0	TRE31626GS	15	100	40	12	9	12	3	15

► NEXT PAGE

◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	230		
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎	○	○		
ISO	N										S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○	◎	◎	○	◎	◎	◎														





MF X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

SERIES

TRE31

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

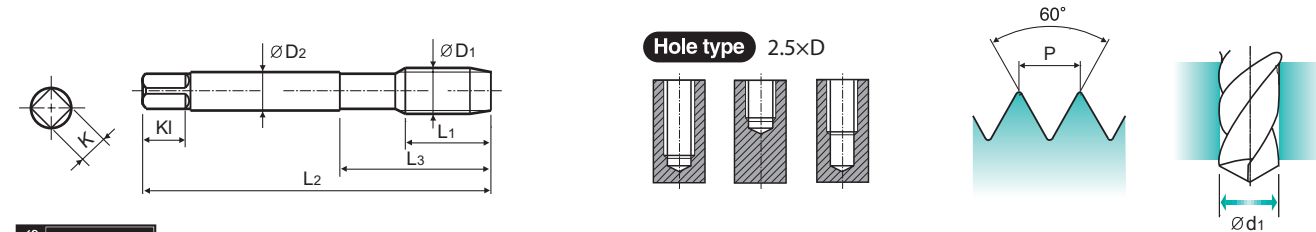

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M18	x 2.0	TRE31666GS	20	125	50	14	11	14	4	16
M18	x 1.5	TRE31676GS	15	110	44	14	11	14	4	16.5
M18	x 1.0	TRE31686GS	15	110	44	14	11	14	4	17
M20	x 2.0	TRE31716GS	20	140	54	16	12	15	4	18
M20	x 1.5	TRE31726GS	15	125	50	16	12	15	4	18.5
M20	x 1.0	TRE31736GS	15	125	50	16	12	15	4	19
M22	x 2.0	TRE31756GS	20	140	54	18	14.5	17	4	20
M22	x 1.5	TRE31766GS	15	125	50	18	14.5	17	4	20.5
M22	x 1.0	TRE31776GS	15	125	50	18	14.5	17	4	21
M24	x 2.0	TRE31796GS	20	140	54	18	14.5	17	4	22
M24	x 1.5	TRE31806GS	15	140	54	18	14.5	17	4	22.5
M24	x 1.0	TRE31816GS	15	140	54	18	14.5	17	4	23

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎			
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	◎	◎	○	◎	◎	◎													



UNF

X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE Unified Fine Threads

SERIES

TRE33


DIN 371



DIN 374



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

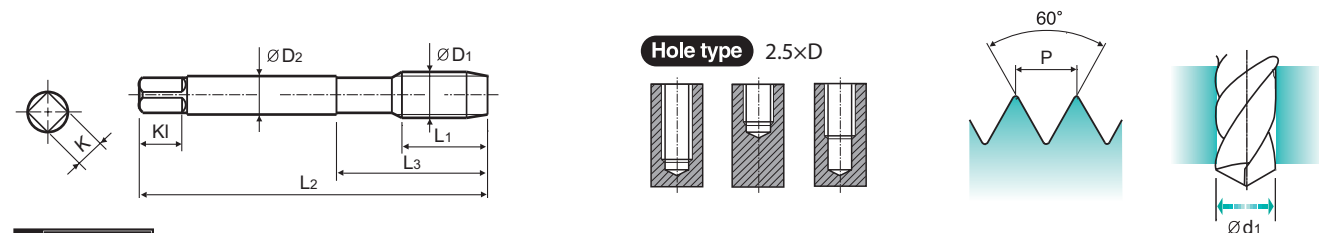

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
#4 - 48 UNF		TRE33182GS	5.1	56	18	3.5	2.7	6	2	2.4
#5 - 44 UNF		TRE33222GS	5.1	56	18	3.5	2.7	6	3	2.7
#6 - 40 UNF		TRE33262GS	6.4	56	20	4	3	6	3	2.9
#8 - 36 UNF		TRE33302GS	6.4	63	21	4.5	3.4	6	3	3.5
#10 - 32 UNF		TRE33342GS	8.5	70	25	6	4.9	8	3	4.1
#12 - 28 UNF		TRE33382GS	8.5	80	30	6	4.9	8	3	4.6
1/4 - 28 UNF		TRE33422GS	10.2	80	30	7	5.5	8	3	5.5
5/16 - 24 UNF		TRE33462GS	10.6	90	35	8	6.2	9	3	6.9
3/8 - 24 UNF		TRE33502GS	10.6	100	39	9	7	10	3	8.5
7/16 - 20 UNF		TRE33542GS	12.7	100	40	8	6.2	9	3	9.9
1/2 - 20 UNF		TRE33582GS	12.7	100	40	9	7	10	3	11.5
9/16 - 18 UNF		TRE33622GS	14.2	100	40	11	9	12	3	12.9
5/8 - 18 UNF		TRE33662GS	14.2	100	40	12	9	12	3	14.5
3/4 - 16 UNF		TRE33722GS	15.9	110	44	14	11	14	4	17.5
7/8 - 14 UNF		TRE33762GS	18.2	125	50	18	14.5	17	4	20.5
1" - 12 UNF		TRE33802GS	21.2	140	54	20	16	19	4	23.2

► DIN 371(#4~3/8) and DIN 374(7/16~1")

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	○	○	○	◎	◎	◎	○	○	◎	◎	○	○	
ISO	N										S					H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	◎	◎	○	◎	◎	◎													



G(BSP)


X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE Whitworth PIPE Threads DIN ISO 228/1

NEW SERIES

TRE37

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

DIN 5156

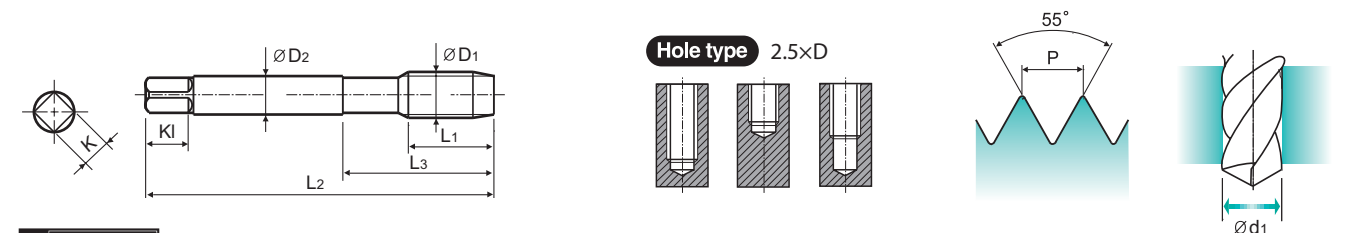

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
G1/16 - 28		TRE37020GS	10	90	36	6	4.9	7.8	3	6.8
G1/8 - 28		TRE37200GS	12	90	36	7	5.5	7.8	3	8.8
G1/4 - 19		TRE37400GS	14	100	48	11	9	11.8	3	11.8
G3/8 - 19		TRE37480GS	16	100	52	12	9	11.8	4	15.25
G1/2 - 14		TRE37560GS	18	125	70	16	12	14.8	4	19
G3/4 - 14		TRE37700GS	22	140	82	20	16	19	4	24.5
G1" - 11		TRE37780GS	24	160	95	25	20	23	4	30.75


◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎			
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	◎	◎	○	◎	◎	◎													




G(BSP) X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE
Whitworth PIPE Threads DIN ISO 228/1

NEW SERIES
TRE38

- ▶ High performance on various ductile materials
- ▶ Specially designed to prevent oversized threads and reduce gauging problems

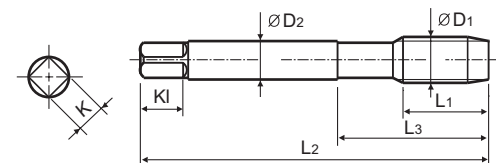

Short Chamfer

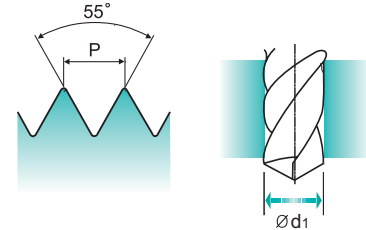

Machine Taps

Unit : mm




SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
G1/16 - 28		TRE38020GS	10	90	36	6	4.9	7.8	3	6.8
G1/8 - 28		TRE38200GS	12	90	36	7	5.5	7.8	3	8.8
G1/4 - 19		TRE38400GS	14	100	48	11	9	11.8	3	11.8
G3/8 - 19		TRE38480GS	16	100	52	12	9	11.8	4	15.25
G1/2 - 14		TRE38560GS	18	125	70	16	12	14.8	4	19
G3/4 - 14		TRE38700GS	22	140	82	20	16	19	4	24.5
G1" - 11		TRE38780GS	24	160	95	25	20	23	4	30.75

M X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE
ISO Metric Coarse Threads DIN 13

SERIES

TRJ15

- ▶ High performance on various ductile materials
- ▶ Specially designed to prevent oversized threads and reduce gauging problems

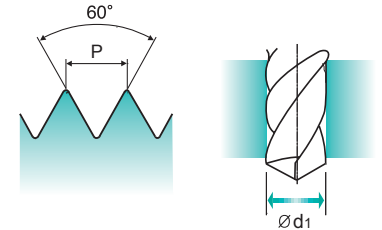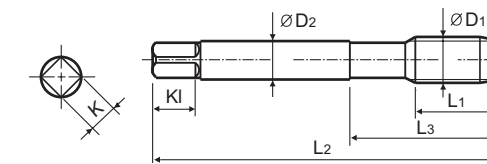

Machine Taps

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	Kl	Z	Ød ₁
M2	x 0.4	TRJ15136GS	8	45	13	2.8	2.1	5	2	1.6
M2.5	x 0.45	TRJ15176GS	9	50	15	2.8	2.1	5	2	2.1
M3	x 0.5	TRJ15206GS	11	56	18	3.5	2.7	6	3	2.5
M3.5	x 0.6	TRJ15226GS	12	56	20	4	3	6	3	2.9
M4	x 0.7	TRJ15246GS	13	63	21	4.5	3.4	6	3	3.3
M5	x 0.8	TRJ15286GS	15	70	25	6	4.9	8	3	4.2
M6	x 1.0	TRJ15316GS	17	80	30	6	4.9	8	3	5
M7	x 1.0	TRJ15346GS	17	80	30	7	5.5	8	3	6
M8	x 1.25	TRJ15366GS	20	90	35	8	6.2	9	3	6.8
M9	x 1.25	TRJ15396GS	20	90	35	9	7	10	3	7.8
M10	x 1.5	TRJ15426GS	22	100	39	10	8	11	3	8.5
M12	x 1.75	TRJ15506GS	24	110	44	9	7	10	3	10.3
M14	x 2.0	TRJ15546GS	26	110	44	11	9	12	3	12
M16	x 2.0	TRJ15606GS	27	110	44	12	9	12	3	14
M18	x 2.5	TRJ15656GS	30	125	50	14	11	14	3	15.5
M20	x 2.5	TRJ15706GS	32	140	54	16	12	15	3	17.5
M22	x 2.5	TRJ15746GS	32	140	54	18	14.5	17	3	19.5
M24	x 3.0	TRJ15786GS	34	160	60	18	14.5	17	3	21

► DIN 371(M2~M10) and DIN 376(M12~M24)

◎ : Excellent ○ : Good

[illegible]

◎ : Excellent ○ : Good


[illegible]



M X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRJ10

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

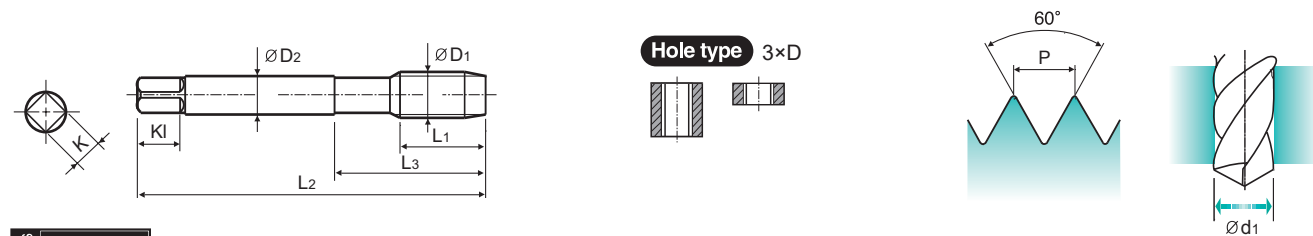

Machine Taps

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M2	x 0.4	TRJ10136GS	8	45	13	2.8	2.1	5	3	1.6
M3	x 0.5	TRJ10206GS	11	56	18	3.5	2.7	6	3	2.5
M4	x 0.7	TRJ10246GS	13	63	21	4.5	3.4	6	3	3.3
M5	x 0.8	TRJ10286GS	15	70	25	6	4.9	8	3	4.2
M6	x 1.0	TRJ10316GS	17	80	30	6	4.9	8	3	5
M8	x 1.25	TRJ10366GS	20	90	35	8	6.2	9	3	6.75
M10	x 1.5	TRJ10426GS	22	100	39	10	8	11	3	8.5
M12	x 1.75	TRJ10506GS	24	110	44	9	7	9.8	3	10.25
M14	x 2.0	TRJ10546GS	26	110	44	11	9	11.8	3	12
M16	x 2.0	TRJ10606GS	27	110	44	12	9	11.8	3	14

► DIN 371(M2~M10) and DIN 376(M12~M16)


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					Stainless steel					Grey cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



MF X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

SERIES
TRJ16

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

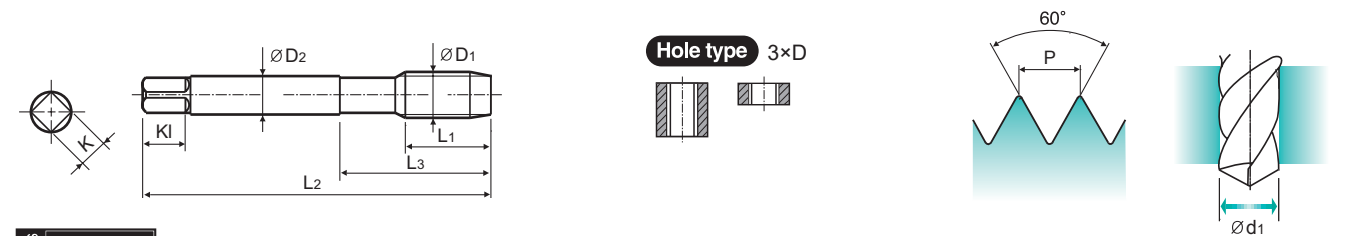

Machine Taps

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M4	x 0.5	TRJ16256GS	10	63	21	2.8	2.1	5	3	3.5
M4	x 0.35	TRJ16696GS	10	63	21	2.8	2.1	5	3	3.7
M5	x 0.5	TRJ16296GS	11	70	25	3.5	2.7	6	3	4.5
M6	x 0.75	TRJ16326GS	13	80	30	4.5	3.4	6	3	5.3
M6	x 0.5	TRJ16336GS	13	80	30	4.5	3.4	6	3	5.5
M8	x 1.0	TRJ16376GS	17	90	36	6	4.9	8	3	7
M8	x 0.75	TRJ16386GS	14	80	30	6	4.9	8	3	7.3
M9	x 1.0	TRJ16406GS	20	90	36	7	5.5	8	3	8
M9	x 0.75	TRJ16416GS	17	80	36	7	5.5	8	3	8.3
M10	x 1.25	TRJ16436GS	22	100	40	7	5.5	8	3	8.8
M10	x 1.0	TRJ16446GS	18	90	36	7	5.5	8	3	9
M10	x 0.75	TRJ16456GS	18	90	36	7	5.5	8	3	9.3
M12	x 1.5	TRJ16516GS	22	100	40	9	7	10	3	10.5
M12	x 1.25	TRJ16526GS	22	100	40	9	7	10	3	10.8
M12	x 1.0	TRJ16536GS	18	100	40	9	7	10	3	11
M14	x 1.5	TRJ16556GS	22	100	40	11	9	12	3	12.5
M14	x 1.25	TRJ16566GS	22	100	40	11	9	12	3	12.8
M14	x 1.0	TRJ16576GS	18	100	40	11	9	12	3	13
M16	x 1.5	TRJ16616GS	22	100	40	12	9	12	3	14.5
M16	x 1.0	TRJ16626GS	18	100	40	12	9	12	3	15
M18	x 2.0	TRJ16666GS	26	125	50	14	11	14	3	16
M18	x 1.5	TRJ16676GS	25	110	44	14	11	14	3	16.5
M18	x 1.0	TRJ16686GS	20	110	44	14	11	14	3	17
M20	x 2.0	TRJ16716GS	27	140	54	16	12	15	3	18
M20	x 1.5	TRJ16726GS	25	125	50	16	12	15	3	18.5
M20	x 1.0	TRJ16736GS	20	125	50	16	12	15	3	19
M22	x 2.0	TRJ16756GS	27	140	54	18	14.5	17	3	20
M22	x 1.5	TRJ16766GS	25	125	50	18	14.5	17	3	20.5
M22	x 1.0	TRJ16776GS	20	125	50	18	14.5	17	3	21
M24	x 2.0	TRJ16796GS	27	140	54	18	14.5	17	3	22
M24	x 1.5	TRJ16806GS	27	140	54	18	14.5	17	3	22.5
M24	x 1.0	TRJ16816GS	20	140	54	18	14.5	17	3	23

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					Stainless steel					Grey cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




MF

X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

NEW
SERIES
TRJ11

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

DIN 374

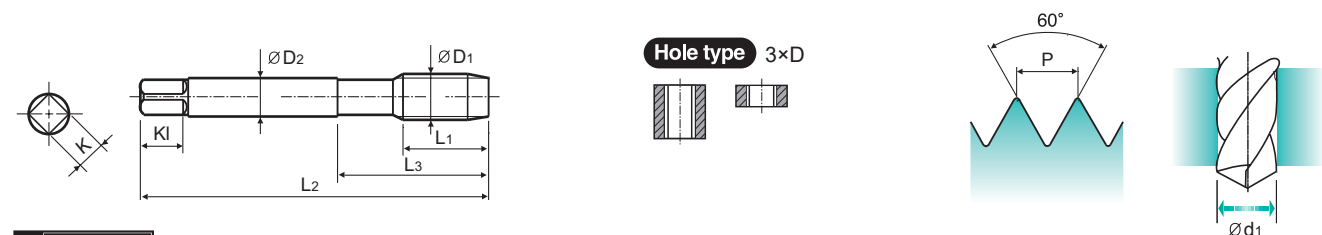

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 0.75	TRJ11326GS	13	80	30	4.5	3.4	5.8	3	5.25
M6	x 0.5	TRJ11336GS	13	80	30	4.5	3.4	5.8	3	5.5
M8	x 1.0	TRJ11376GS	17	90	36	6	4.9	7.8	3	7
M8	x 0.75	TRJ11386GS	14	80	30	6	4.9	7.8	3	7.25
M10	x 1.25	TRJ11436GS	22	100	40	7	5.5	7.8	3	8.75
M10	x 1.0	TRJ11446GS	18	90	36	7	5.5	7.8	3	9
M12	x 1.5	TRJ11516GS	22	100	40	9	7	9.8	3	10.5
M12	x 1.25	TRJ11526GS	22	100	40	9	7	9.8	3	10.75
M12	x 1.0	TRJ11536GS	18	100	40	9	7	9.8	3	11
M14	x 1.5	TRJ11556GS	22	100	40	11	9	11.8	3	12.5
M14	x 1.25	TRJ11566GS	22	100	40	11	9	11.8	3	12.75
M16	x 1.5	TRJ11616GS	22	100	40	12	9	11.8	3	14.5

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



UNC


X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE Unified Coarse Threads

SERIES
TRJ17

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

DIN 371

DIN 376

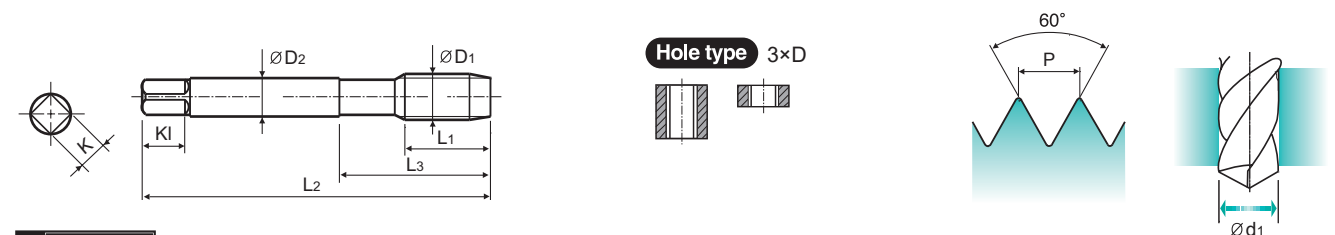

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
#4 - 40 UNC		TRJ17162GS	11	56	18	3.5	2.7	6	2	2.3
#5 - 40 UNC		TRJ17202GS	11	56	18	3.5	2.7	6	3	2.6
#6 - 32 UNC		TRJ17242GS	12	56	20	4	3	6	3	2.8
#8 - 32 UNC		TRJ17282GS	13	63	21	4.5	3.4	6	3	3.4
#10 - 24 UNC		TRJ17322GS	15	70	25	6	4.9	8	3	3.9
#12 - 24 UNC		TRJ17362GS	16	80	30	6	4.9	8	3	4.5
1/4 - 20 UNC		TRJ17402GS	17	80	30	7	5.5	8	3	5.1
5/16 - 18 UNC		TRJ17442GS	20	90	35	8	6.2	9	3	6.6
3/8 - 16 UNC		TRJ17482GS	22	100	39	9	7	10	3	8
7/16 - 14 UNC		TRJ17522GS	22	100	40	8	6.2	9	3	9.4
1/2 - 13 UNC		TRJ17562GS	25	110	44	9	7	10	3	10.8
9/16 - 12 UNC		TRJ17602GS	26	110	44	11	9	12	3	12.2
5/8 - 11 UNC		TRJ17642GS	27	110	44	12	9	12	3	13.6
3/4 - 10 UNC		TRJ17702GS	30	125	50	14	11	14	3	16.5
7/8 - 9 UNC		TRJ17742GS	32	140	54	18	14.5	17	3	19.5
1" - 8 UNC		TRJ17782GS	36	160	60	20	16	19	3	22.2

► DIN 371(#4~3/8) and DIN 376(7/16~1")

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



UNF

X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE
Unified Fine Threads

SERIES

TRJ18


DIN 371



DIN 374



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

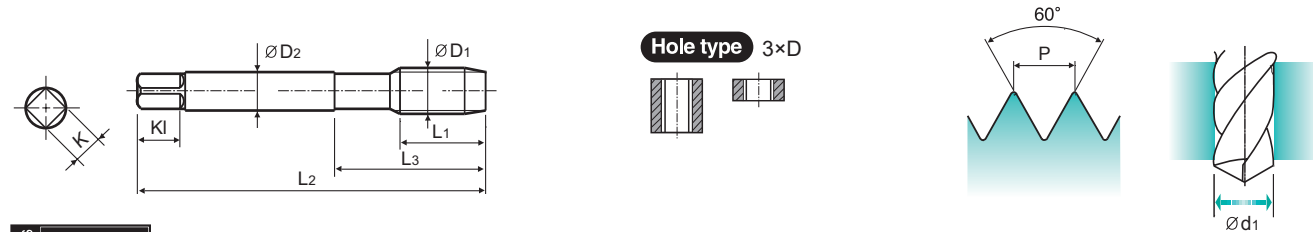

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
#4 - 48 UNF		TRJ18182GS	11	56	18	3.5	2.7	6	2	2.4
#5 - 44 UNF		TRJ18222GS	11	56	18	3.5	2.7	6	3	2.7
#6 - 40 UNF		TRJ18262GS	12	56	20	4	3	6	3	2.9
#8 - 36 UNF		TRJ18302GS	13	63	21	4.5	3.4	6	3	3.5
#10 - 32 UNF		TRJ18342GS	15	70	25	6	4.9	8	3	4.1
#12 - 28 UNF		TRJ18382GS	16	80	30	6	4.9	8	3	4.6
1/4 - 28 UNF		TRJ18422GS	17	80	30	7	5.5	8	3	5.5
5/16 - 24 UNF		TRJ18462GS	17	90	35	8	6.2	9	3	6.9
3/8 - 24 UNF		TRJ18502GS	18	100	39	9	7	10	3	8.5
7/16 - 20 UNF		TRJ18542GS	22	100	40	8	6.2	9	3	9.9
1/2 - 20 UNF		TRJ18582GS	22	100	40	9	7	10	3	11.5
9/16 - 18 UNF		TRJ18622GS	22	100	40	11	9	12	3	12.9
5/8 - 18 UNF		TRJ18662GS	22	100	40	12	9	12	3	14.5
3/4 - 16 UNF		TRJ18722GS	25	110	44	14	11	14	3	17.5
7/8 - 14 UNF		TRJ18762GS	26	125	50	18	14.5	17	3	20.5
1" - 12 UNF		TRJ18802GS	28	140	54	20	16	19	3	23.2

► DIN 371(#4~3/8) and DIN374(7/16~1")

◎ : Excellent ○ : Good																					
ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	30	25	38	34		55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	◎	◎	○	◎	◎	◎													



G(BSP)


X-COATED HSS-PM SPIRAL POINT TAPS for MULTI-PURPOSE
Whitworth PIPE Threads DIN ISO 228/1

NEW SERIES

TRJ12

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

DIN 5156

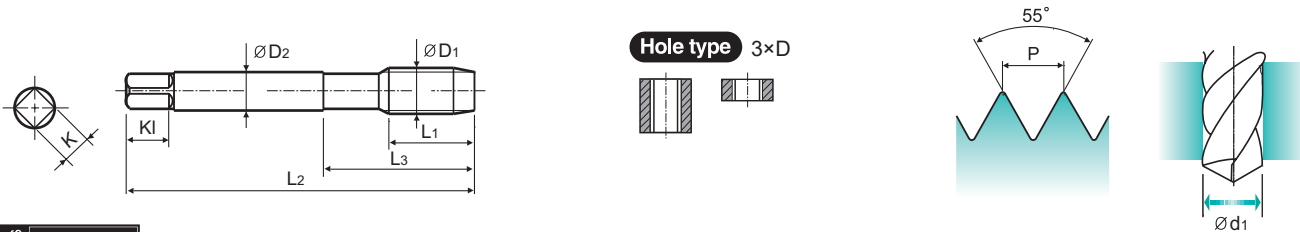

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
G1/16 - 28		TRJ12020GS	20	90	36	6	4.9	7.8	3	6.8
G1/8 - 28		TRJ12200GS	20	90	36	7	5.5	7.8	3	8.8
G1/4 - 19		TRJ12400GS	22	100	48	11	9	11.8	3	11.8
G3/8 - 19		TRJ12480GS	22	100	52	12	9	11.8	3	15.25
G1/2 - 14		TRJ12560GS	25	125	70	16	12	14.8	3	19
G3/4 - 14		TRJ12700GS	28	140	82	20	16	19	4	24.5
G1" - 11		TRJ12780GS	30	160	95	25	20	23	4	30.75


◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloy steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○	◎	◎	○	◎	◎	◎														



M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ10

- DIN 371 
- DIN 376 
- High performance on various ductile materials
► Specially designed to prevent oversized threads and reduce gauging problems

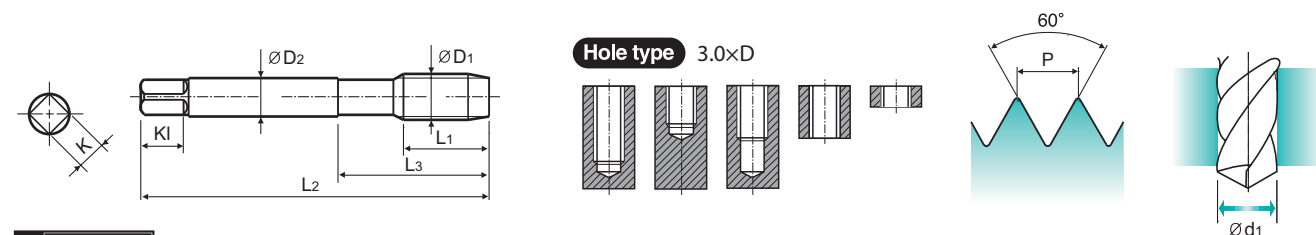

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M3	x 0.5	TRQ10206GS	6	56	18	3.5	2.7	6	4	2.8
M3.5	x 0.6	TRQ10226GS	7.2	56	20	4	3	6	4	3.25
M4	x 0.7	TRQ10246GS	8.4	63	21	4.5	3.4	6	4	3.7
M5	x 0.8	TRQ10286GS	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ10316GS	10	80	30	6	4.9	8	5	5.55
M7	x 1.0	TRQ10346GS	10	80	30	7	5.5	8	5	6.55
M8	x 1.25	TRQ10366GS	12	90	35	8	6.2	9	5	7.4
M9	x 1.25	TRQ10396GS	12	90	35	9	7	10	5	8.4
M10	x 1.5	TRQ10426GS	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ10506GS	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ10546GS	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ10606GS	20	110	44	12	9	11.8	8	15
M18	x 2.5	TRQ10656GS	20	125	50	14	11	13.8	8	16.8
M20	x 2.5	TRQ10706GS	20	140	54	16	12	14.8	8	18.8
M22	x 2.5	TRQ10746GS	20	140	54	18	14.5	16.8	8	20.8
M24	x 3.0	TRQ10786GS	24	160	60	18	14.5	17	8	22.5

► DIN 371(M3~M10) and DIN 376(M12~M24)

◎ : Excellent ○ : Good


ISO	P										M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎								
ISO	N										S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎														



M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ14

- DIN 371 
- DIN 376 
- High performance on various ductile materials
► Specially designed to prevent oversized threads and reduce gauging problems

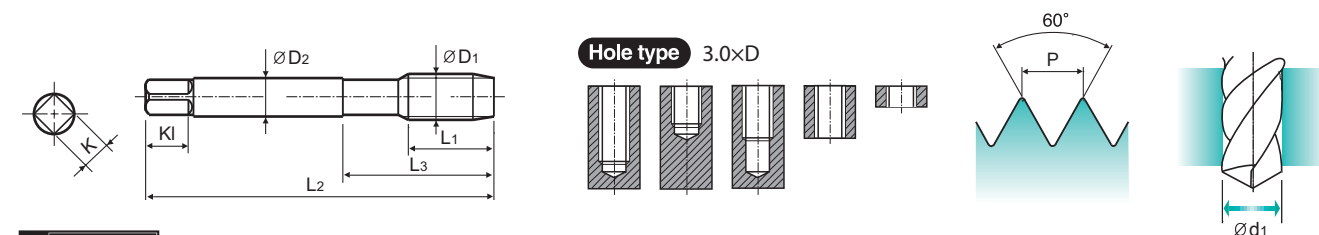

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M3	x 0.5	TRQ14206GS	6	56	18	3.5	2.7	6	4	2.8
M3.5	x 0.6	TRQ14226GS	7.2	56	20	4	3	6	4	3.25
M4	x 0.7	TRQ14246GS	8.4	63	21	4.5	3.4	6	4	3.7
M5	x 0.8	TRQ14286GS	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ14316GS	10	80	30	6	4.9	8	5	5.55
M7	x 1.0	TRQ14346GS	10	80	30	7	5.5	8	5	6.55
M8	x 1.25	TRQ14366GS	12	90	35	8	6.2	9	5	7.4
M9	x 1.25	TRQ14396GS	12	90	35	9	7	10	5	8.4
M10	x 1.5	TRQ14426GS	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ14506GS	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ14546GS	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ14606GS	20	110	44	12	9	11.8	8	15
M18	x 2.5	TRQ14656GS	20	125	50	14	11	13.8	8	16.8
M20	x 2.5	TRQ14706GS	20	140	54	16	12	14.8	8	18.8
M22	x 2.5	TRQ14746GS	20	140	54	18	14.5	16.8	8	20.8
M24	x 3.0	TRQ14786GS	24	160	60	18	14.5	17	8	22.5

► DIN 371(M3~M10) and DIN 376(M12~M24)

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	23	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎												




M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ16



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

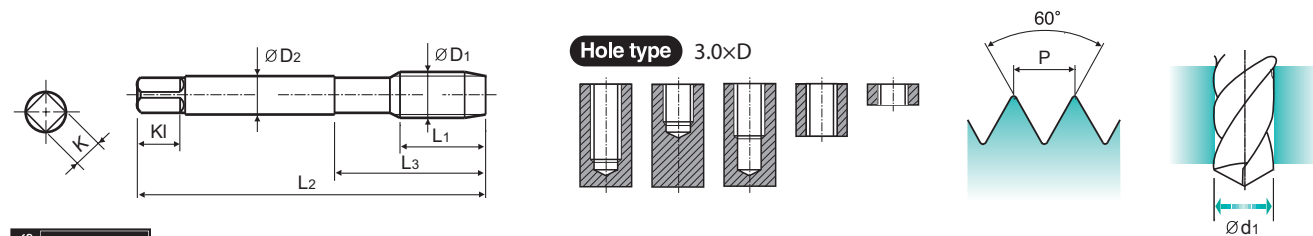

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M3	x 0.5	TRQ16206GS	6	56	18	3.5	2.7	6	4	2.8
M3.5	x 0.6	TRQ16226GS	7.2	56	20	4	3	6	4	3.25
M4	x 0.7	TRQ16246GS	8.4	63	21	4.5	3.4	6	4	3.7
M5	x 0.8	TRQ16286GS	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ16316GS	10	80	30	6	4.9	8	5	5.55
M7	x 1.0	TRQ16346GS	10	80	30	7	5.5	8	5	6.55
M8	x 1.25	TRQ16366GS	12	90	35	8	6.2	9	5	7.4
M9	x 1.25	TRQ16396GS	12	90	35	9	7	10	5	8.4
M10	x 1.5	TRQ16426GS	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ16506GS	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ16546GS	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ16606GS	20	110	44	12	9	11.8	8	15

► DIN 371(M3~M10) and DIN 376(M12~M16)

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎													




M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ12



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

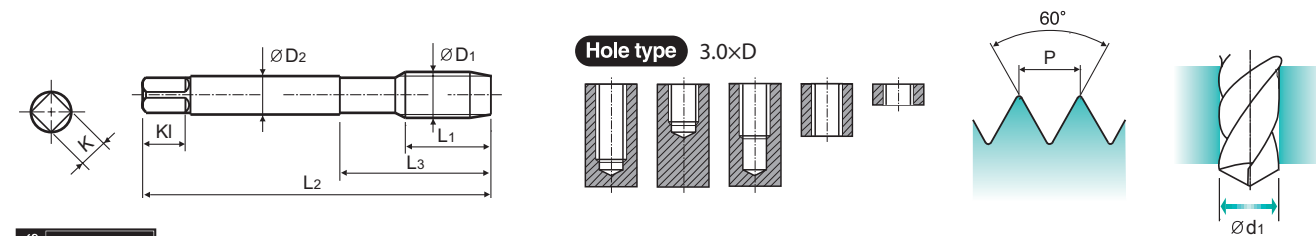

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M3	x 0.5	TRQ12206GS	6	56	18	3.5	2.7	6	4	2.8
M3.5	x 0.6	TRQ12226GS	7.2	56	20	4	3	6	4	3.25
M4	x 0.7	TRQ12246GS	8.4	63	21	4.5	3.4	6	4	3.7
M5	x 0.8	TRQ12286GS	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ12316GS	10	80	30	6	4.9	8	5	5.55
M7	x 1.0	TRQ12346GS	10	80	30	7	5.5	8	5	6.55
M8	x 1.25	TRQ12366GS	12	90	35	8	6.2	9	5	7.4
M9	x 1.25	TRQ12396GS	12	90	35	9	7	10	5	8.4
M10	x 1.5	TRQ12426GS	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ12506GS	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ12546GS	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ12606GS	20	110	44	12	9	11.8	8	15

► DIN 371(M3~M10) and DIN 376(M12~M16)

◎ : Excellent ○ : Good


ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎											



MF X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

NEW SERIES
TRQ11

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

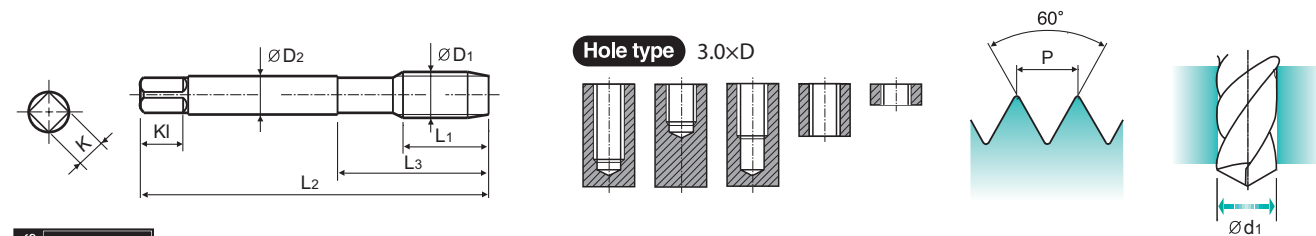

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 0.75	TRQ11326GS	10	80	30	4.5	3.4	5.8	5	5.65
M6	x 0.5	TRQ11336GS	10	80	30	4.5	3.4	5.8	5	5.75
M8	x 1.0	TRQ11376GS	12	90	36	6	4.9	7.8	5	7.5
M8	x 0.75	TRQ11386GS	12	80	30	6	4.9	7.8	5	7.65
M10	x 1.25	TRQ11436GS	15	100	40	7	5.5	7.8	8	9.4
M10	x 1.0	TRQ11446GS	15	90	36	7	5.5	7.8	8	9.5
M10	x 0.75	TRQ11456GS	15	90	36	7	5.5	7.8	8	9.65
M12	x 1.5	TRQ11516GS	17	100	40	9	7	9.8	8	11.25
M12	x 1.25	TRQ11526GS	17	100	40	9	7	9.8	8	11.4
M12	x 1.0	TRQ11536GS	17	100	40	9	7	9.8	8	11.5
M14	x 1.5	TRQ11556GS	20	100	40	11	9	11.8	8	13.25
M14	x 1.25	TRQ11566GS	20	100	40	11	9	11.8	8	13.4
M14	x 1.0	TRQ11576GS	20	100	40	11	9	11.8	8	13.5
M16	x 1.5	TRQ11616GS	20	100	40	12	9	11.8	8	15.25
M16	x 1.0	TRQ11626GS	20	100	40	12	9	11.8	8	15.5
M18	x 2.0	TRQ11666GS	20	125	50	14	11	13.8	8	17
M18	x 1.5	TRQ11676GS	15	110	44	14	11	13.8	8	17.25
M18	x 1.0	TRQ11686GS	10	110	44	14	11	13.8	8	17.5
M20	x 2.0	TRQ11716GS	20	140	54	16	12	14.8	8	19
M20	x 1.5	TRQ11726GS	15	125	50	16	12	14.8	8	19.25
M20	x 1.0	TRQ11736GS	10	125	50	16	12	14.8	8	19.5
M22	x 1.5	TRQ11766GS	15	125	50	18	14.5	16.8	8	21.25
M24	x 1.5	TRQ11806GS	15	140	54	18	14.5	17	8	23.25


◎ : Excellent ○ : Good																		
ISO	P										M					K		
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H		
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎			◎	◎	◎	◎	◎	◎	◎	◎



MF X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

NEW SERIES
TRQ15

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

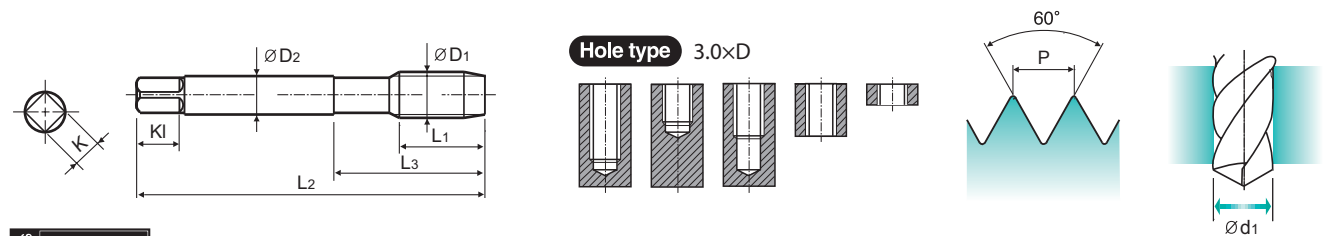

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 0.75	TRQ15326GS	10	80	30	4.5	3.4	5.8	5	5.65
M6	x 0.5	TRQ15336GS	10	80	30	4.5	3.4	5.8	5	5.75
M8	x 1.0	TRQ15376GS	12	90	36	6	4.9	7.8	5	7.5
M8	x 0.75	TRQ15386GS	12	80	30	6	4.9	7.8	5	7.65
M10	x 1.25	TRQ15436GS	15	100	40	7	5.5	7.8	8	9.4
M10	x 1.0	TRQ15446GS	15	90	36	7	5.5	7.8	8	9.5
M10	x 0.75	TRQ15456GS	15	90	36	7	5.5	7.8	8	9.65
M12	x 1.5	TRQ15516GS	17	100	40	9	7	9.8	8	11.25
M12	x 1.25	TRQ15526GS	17	100	40	9	7	9.8	8	11.4
M12	x 1.0	TRQ15536GS	17	100	40	9	7	9.8	8	11.5
M14	x 1.5	TRQ15556GS	20	100	40	11	9	11.8	8	13.25
M14	x 1.25	TRQ15566GS	20	100	40	11	9	11.8	8	13.4
M14	x 1.0	TRQ15576GS	20	100	40	11	9	11.8	8	13.5
M16	x 1.5	TRQ15616GS	20	100	40	12	9	11.8	8	15.25
M16	x 1.0	TRQ15626GS	20	100	40	12	9	11.8	8	15.5
M18	x 2.0	TRQ15666GS	20	125	50	14	11	13.8	8	17
M18	x 1.5	TRQ15676GS	15	110	44	14	11	13.8	8	17.25
M18	x 1.0	TRQ15686GS	10	110	44	14	11	13.8	8	17.5
M20	x 2.0	TRQ15716GS	20	140	54	16	12	14.8	8	19
M20	x 1.5	TRQ15726GS	15	125	50	16	12	14.8	8	19.25
M20	x 1.0	TRQ15736GS	10	125	50	16	12	14.8	8	19.5
M22	x 1.5	TRQ15766GS	15	125	50	18	14.5	16.8	8	21.25
M24	x 1.5	TRQ15806GS	15	140	54	18	14.5	17	8	23.25

◎ : Excellent ○ : Good																		
ISO	P										M					K		
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H		
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎			◎	◎	◎	◎	◎	◎	◎	◎



MF X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13


NEW SERIES
TRQ13

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

DIN 374



Short Chamfer

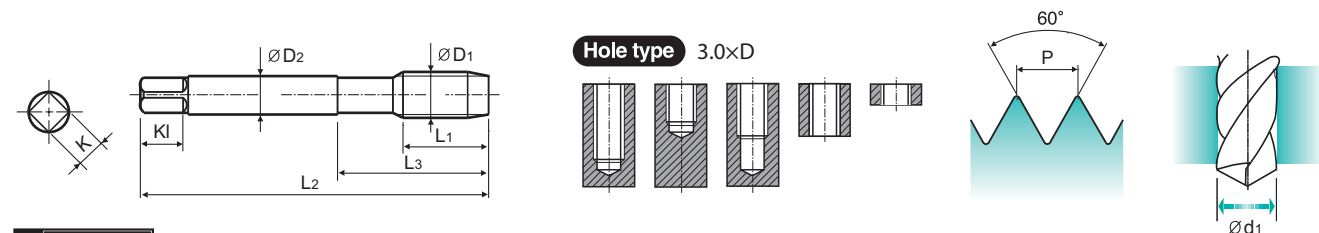

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M8	x 1.0	TRQ13376GS	12	90	36	6	4.9	7.8	5	7.5
M8	x 0.75	TRQ13386GS	12	80	30	6	4.9	7.8	5	7.65
M10	x 1.25	TRQ13436GS	15	100	40	7	5.5	7.8	8	9.4
M10	x 1.0	TRQ13446GS	15	90	36	7	5.5	7.8	8	9.5
M12	x 1.5	TRQ13516GS	17	100	40	9	7	9.8	8	11.25
M12	x 1.25	TRQ13526GS	17	100	40	9	7	9.8	8	11.4
M12	x 1.0	TRQ13536GS	17	100	40	9	7	9.8	8	11.5
M14	x 1.5	TRQ13556GS	20	100	40	11	9	11.8	8	13.25
M14	x 1.25	TRQ13566GS	20	100	40	11	9	11.8	8	13.4
M14	x 1.0	TRQ13576GS	20	100	40	11	9	11.8	8	13.5
M16	x 1.5	TRQ13616GS	20	100	40	12	9	11.8	8	15.25
M16	x 1.0	TRQ13626GS	20	100	40	12	9	11.8	8	15.5

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎													



UNC X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE Unified Coarse Threads


NEW SERIES
TRQ18

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

DIN 371



DIN 376

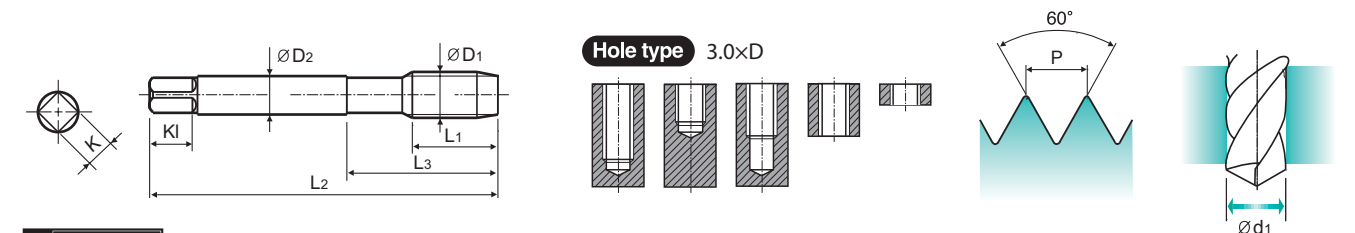

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
#4	- 40 UNC	TRQ18162GS	7.6	56	18	3.5	2.7	6	4	2.6
#5	- 40 UNC	TRQ18202GS	7.6	56	18	3.5	2.7	6	4	2.9
#6	- 32 UNC	TRQ18242GS	9.5	56	20	4	3	6	4	3.15
#8	- 32 UNC	TRQ18282GS	9.5	63	21	4.5	3.4	6	4	3.8
#10	- 24 UNC	TRQ18322GS	12.7	70	25	6	4.9	8	5	4.3
#12	- 24 UNC	TRQ18362GS	12.7	80	30	6	4.9	8	5	4.95
1/4	- 20 UNC	TRQ18402GS	12.7	80	30	7	5.5	8	5	5.7
5/16	- 18 UNC	TRQ18442GS	14.1	90	35	8	6.2	9	5	7.2
3/8	- 16 UNC	TRQ18482GS	15.9	100	39	9	7	10	8	8.7
7/16	- 14 UNC	TRQ18522GS	18.1	100	40	8	6.2	8.8	8	10.2
1/2	- 13 UNC	TRQ18562GS	19.5	110	44	9	7	9.8	8	11.7
9/16	- 12 UNC	TRQ18602GS	21.2	110	44	11	9	11.8	8	13.2
5/8	- 11 UNC	TRQ18642GS	23.1	110	44	12	9	11.8	8	14.7
3/4	- 10 UNC	TRQ18702GS	20.3	125	50	14	11	13.8	8	17.8
7/8	- 9 UNC	TRQ18742GS	22.6	140	54	18	14.5	16.8	8	20.8
1"	- 8 UNC	TRQ18782GS	25.4	160	60	20	16	19	8	23.8

► DIN 371(#4~3/8) and DIN 376(7/16~1")

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	20	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100		75	90	130	110	90	100		200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎												




UNF

X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE Unified Fine Threads

NEW SERIES
TRQ19



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

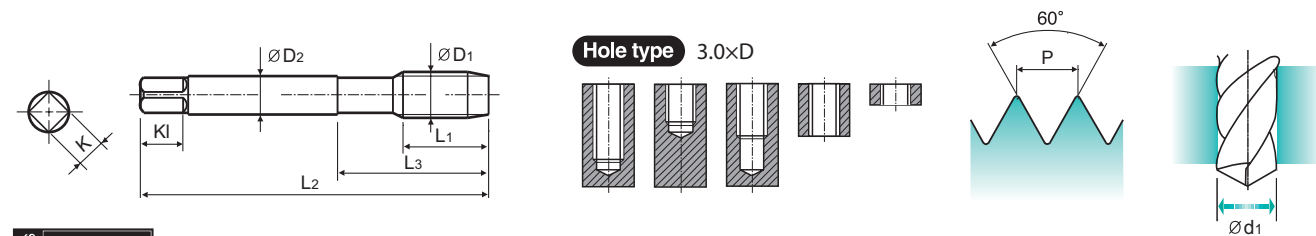

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
#4 - 48 UNF		TRQ19182GS	7.6	56	18	3.5	2.7	6	4	2.6
#5 - 44 UNF		TRQ19222GS	7.6	56	18	3.5	2.7	6	4	2.9
#6 - 40 UNF		TRQ19262GS	9.5	56	20	4	3	6	4	3.25
#8 - 36 UNF		TRQ19302GS	9.5	63	21	4.5	3.4	6	4	3.9
#10 - 32 UNF		TRQ19342GS	12.7	70	25	6	4.9	8	5	4.45
#12 - 28 UNF		TRQ19382GS	12.7	80	30	6	4.9	8	5	5.05
1/4 - 28 UNF		TRQ19422GS	12.7	80	30	7	5.5	8	5	5.9
5/16 - 24 UNF		TRQ19462GS	14.1	90	35	8	6.2	9	5	7.4
3/8 - 24 UNF		TRQ19502GS	15.9	100	39	9	7	10	8	9
7/16 - 20 UNF		TRQ19542GS	18.1	100	40	8	6.2	8.8	8	10.5
1/2 - 20 UNF		TRQ19582GS	19.5	100	40	9	7	9.8	8	12.1
9/16 - 18 UNF		TRQ19622GS	21.2	100	40	11	9	11.8	8	13.6
5/8 - 18 UNF		TRQ19662GS	23.1	100	40	12	9	11.8	8	15.2
3/4 - 16 UNF		TRQ19722GS	15.9	110	44	14	11	13.8	8	18.3
7/8 - 14 UNF		TRQ19762GS	18.1	125	50	18	14.5	16.8	8	21.3
1" - 12 UNF		TRQ19802GS	21.2	140	54	20	16	19	8	24.3

► DIN 371(#4~3/8) and DIN374(7/16~1")

◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎								
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎														




G(BSP)

X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE Whitworth PIPE Threads DIN ISO 228/1

NEW SERIES
TRQ17



- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

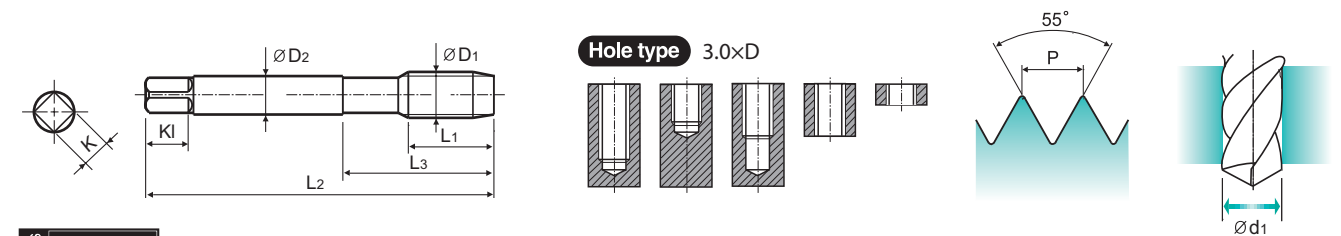

Machine Taps

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁		X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
G1/16 - 28		TRQ17020GS	9	90	36	6	4.9	7.8	5	7.3
G1/8 - 28		TRQ17200GS	9	90	36	7	5.5	7.8	8	9.3
G1/4 - 19		TRQ17400GS	13	100	40	11	9	11.8	8	12.5
G3/8 - 19		TRQ17480GS	13	100	40	12	9	11.8	8	16
G1/2 - 14		TRQ17560GS	18	125	50	16	12	14.8	8	20
G3/4 - 14		TRQ17700GS	18	140	54	20	16	19	8	25.5
G1" - 11		TRQ17780GS	23	160	60	25	20	23	8	32.1

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎		◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
HRC											15	30	25	38	34			55	60	42	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎												





M X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRE39

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems



with Internal Coolant

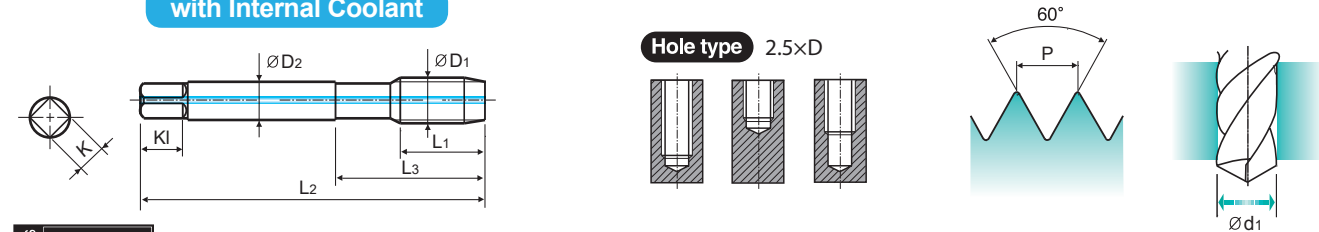

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 1.0	TRE39316GS	10	80	30	6	4.9	8	3	5
M8	x 1.25	TRE39366GS	13	90	35	8	6.2	9	3	6.75
M10	x 1.5	TRE39426GS	15	100	39	10	8	11	3	8.5
M12	x 1.75	TRE39506GS	18	110	44	9	7	9.8	3	10.25
M14	x 2.0	TRE39546GS	20	110	52	11	9	11.8	3	12
M16	x 2.0	TRE39606GS	20	110	52	12	9	11.8	3	14
M18	x 2.5	TRE39656GS	25	125	66	14	11	13.8	4	15.5
M20	x 2.5	TRE39706GS	25	140	72	16	12	14.8	4	17.5
M22	x 2.5	TRE39746GS	25	140	78	18	14.5	16.8	4	19.5
M24	x 3.0	TRE39786GS	30	160	85	18	14.5	17	4	21
M27	x 3.0	TRE39866GS	30	160	92	20	16	19	4	24
M30	x 3.5	TRE39946GS	35	180	102	22	18	21	4	26.5

► DIN 371(M6~M10) and DIN 376(M12~M30)

◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC	13	23	25	28	32	10	29	32	38	15	35	12	23	10	10	26	3	25	21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎					
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended	○	○	◎	◎	○	◎	◎	◎															



M X-COATED HSS-PM SPIRAL FLUTE TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13



NEW SERIES
TRE41

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems



Short Chamfer

with Internal Coolant

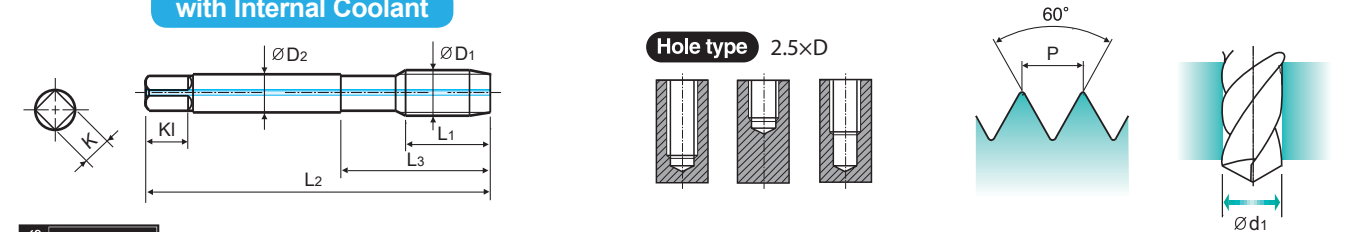

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 1.0	TRE41316GS	10	80	30	6	4.9	8	3	5
M8	x 1.25	TRE41366GS	13	90	35	8	6.2	9	3	6.75
M10	x 1.5	TRE41426GS	15	100	39	10	8	11	3	8.5
M12	x 1.75	TRE41506GS	18	110	44	9	7	9.8	3	10.25
M14	x 2.0	TRE41546GS	20	110	52	11	9	11.8	3	12
M16	x 2.0	TRE41606GS	20	110	52	12	9	11.8	3	14
M20	x 2.5	TRE41706GS	25	140	72	16	12	14.8	4	17.5

► DIN 371(M6~M10) and DIN 376(M12~M20)


◎ : Excellent ○ : Good																							
ISO	P										M			K									
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	◎					
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron		Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended	○	○	◎	◎	○	◎	◎	◎															



M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ20

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

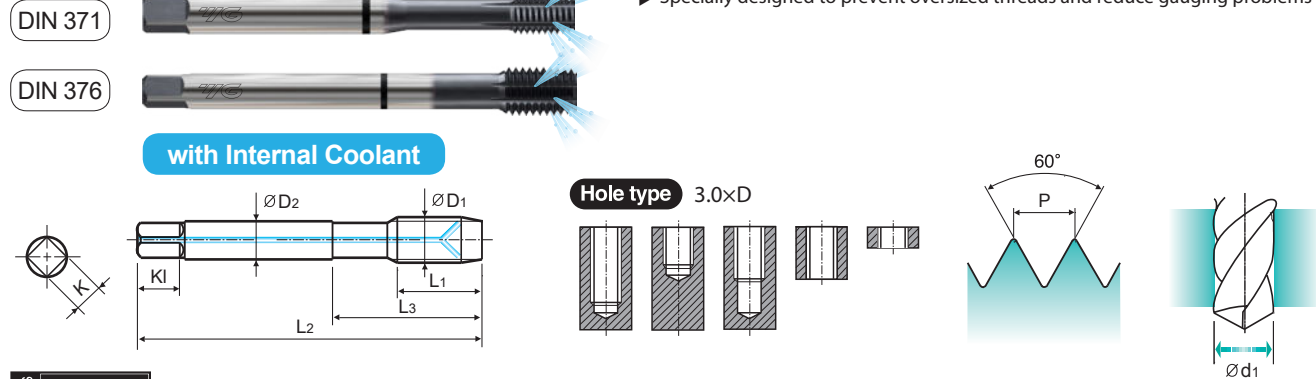

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M5	x 0.8	TRQ20286GSP	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ20316GSP	10	80	30	6	4.9	8	5	5.55
M8	x 1.25	TRQ20366GSP	12	90	35	8	6.2	9	5	7.4
M10	x 1.5	TRQ20426GSP	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ20506GSP	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ20546GSP	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ20606GSP	20	110	44	12	9	11.8	8	15
M18	x 2.5	TRQ20656GSP	20	125	50	14	11	13.8	8	16.8
M20	x 2.5	TRQ20706GSP	20	140	54	16	12	14.8	8	18.8
M22	x 2.5	TRQ20746GSP	20	140	54	18	14.5	16.8	8	20.8
M24	x 3.0	TRQ20786GSP	24	160	60	18	14.5	17	8	22.5

► DIN 371(M5~M10) and DIN 376(M12~M24)


◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎													



M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ24

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

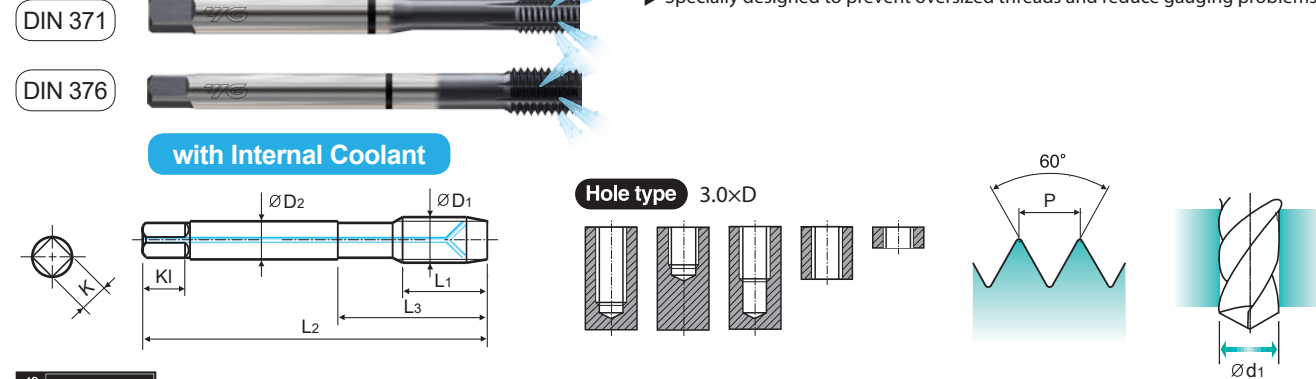

Machine Taps

Unit : mm										
SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M5	x 0.8	TRQ24286GSP	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ24316GSP	10	80	30	6	4.9	8	5	5.55
M8	x 1.25	TRQ24366GSP	12	90	35	8	6.2	9	5	7.4
M10	x 1.5	TRQ24426GSP	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ24506GSP	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ24546GSP	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ24606GSP	20	110	44	12	9	11.8	8	15


► DIN 371(M5~M10) and DIN 376(M12~M16)

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	15	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎							
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎												



M X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Coarse Threads DIN 13

NEW SERIES
TRQ22

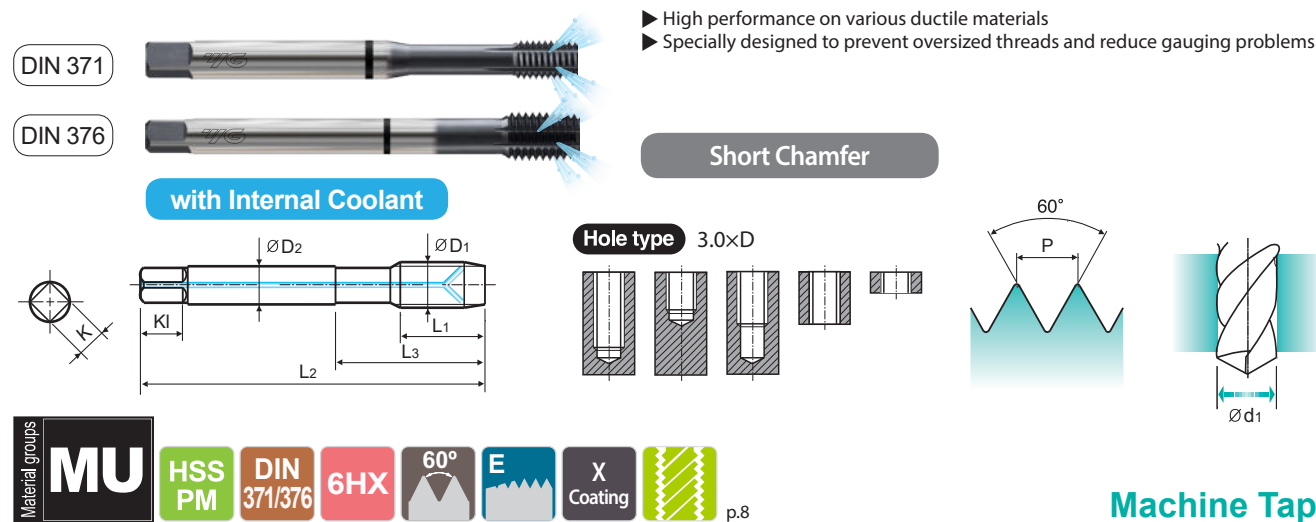

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M5	x 0.8	TRQ22286GSP	9.6	70	25	6	4.9	8	5	4.65
M6	x 1.0	TRQ22316GSP	10	80	30	6	4.9	8	5	5.55
M8	x 1.25	TRQ22366GSP	12	90	35	8	6.2	9	5	7.4
M10	x 1.5	TRQ22426GSP	15	100	39	10	8	11	8	9.3
M12	x 1.75	TRQ22506GSP	17	110	44	9	7	9.8	8	11.2
M14	x 2.0	TRQ22546GSP	20	110	44	11	9	11.8	8	13
M16	x 2.0	TRQ22606GSP	20	110	44	12	9	11.8	8	15

► DIN 371(M5~M10) and DIN 376(M12~M16)


◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					Stainless steel					Grey cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



MF X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

NEW SERIES
TRQ21

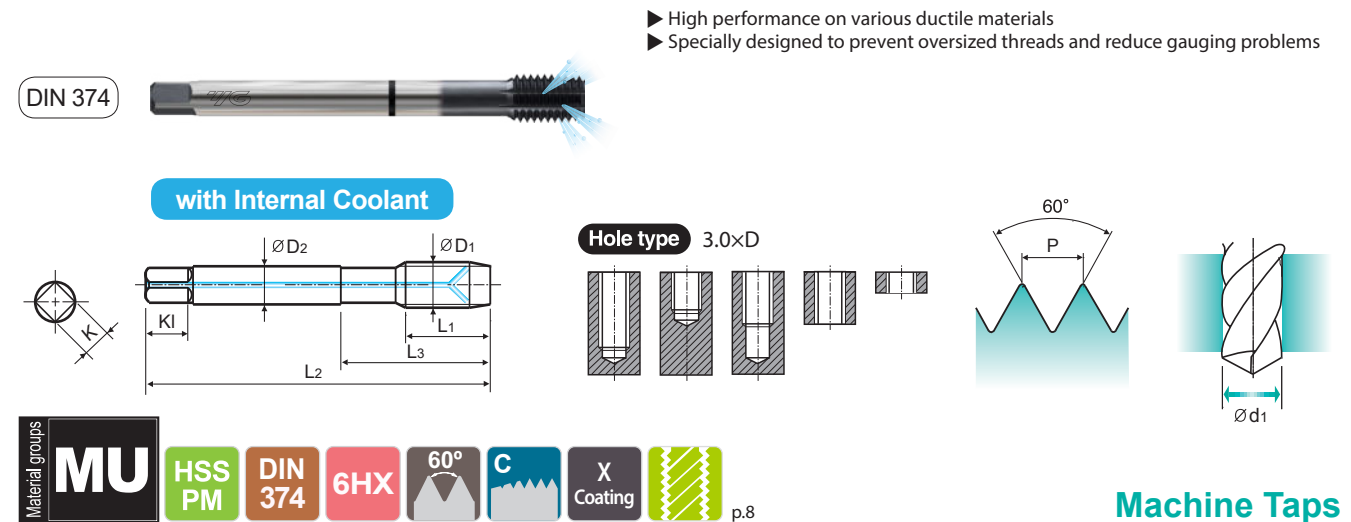

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 0.75	TRQ21326GSP	10	80	30	4.5	3.4	5.8	5	5.65
M6	x 0.5	TRQ21336GSP	10	80	30	4.5	3.4	5.8	5	5.75
M8	x 1.0	TRQ21376GSP	12	90	36	6	4.9	7.8	5	7.5
M8	x 0.75	TRQ21386GSP	12	80	30	6	4.9	7.8	5	7.65
M10	x 1.25	TRQ21436GSP	15	100	40	7	5.5	7.8	8	9.4
M10	x 1.0	TRQ21446GSP	15	90	36	7	5.5	7.8	8	9.5
M10	x 0.75	TRQ21456GSP	15	90	36	7	5.5	7.8	8	9.65
M12	x 1.5	TRQ21516GSP	17	100	40	9	7	9.8	8	11.25
M12	x 1.25	TRQ21526GSP	17	100	40	9	7	9.8	8	11.4
M12	x 1.0	TRQ21536GSP	17	100	40	9	7	9.8	8	11.5
M14	x 1.5	TRQ21556GSP	20	100	40	11	9	11.8	8	13.25
M14	x 1.25	TRQ21566GSP	20	100	40	11	9	11.8	8	13.4
M14	x 1.0	TRQ21576GSP	20	100	40	11	9	11.8	8	13.5
M16	x 1.5	TRQ21616GSP	20	100	40	12	9	11.8	8	15.25
M16	x 1.0	TRQ21626GSP	20	100	40	12	9	11.8	8	15.5
M18	x 2.0	TRQ21666GSP	20	125	50	14	11	13.8	8	17
M18	x 1.5	TRQ21676GSP	15	110	44	14	11	13.8	8	17.25
M18	x 1.0	TRQ21686GSP	10	110	44	14	11	13.8	8	17.5
M20	x 2.0	TRQ21716GSP	20	140	54	16	12	14.8	8	19
M20	x 1.5	TRQ21726GSP	15	125	50	16	12	14.8	8	19.25
M20	x 1.0	TRQ21736GSP	10	125	50	16	12	14.8	8	19.5
M22	x 1.5	TRQ21766GSP	15	125	50	18	14.5	16.8	8	21.25
M24	x 1.5	TRQ21806GSP	15	140	54	18	14.5	17	8	23.25

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					Stainless steel					Grey cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



MF X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

NEW SERIES
TRQ25

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

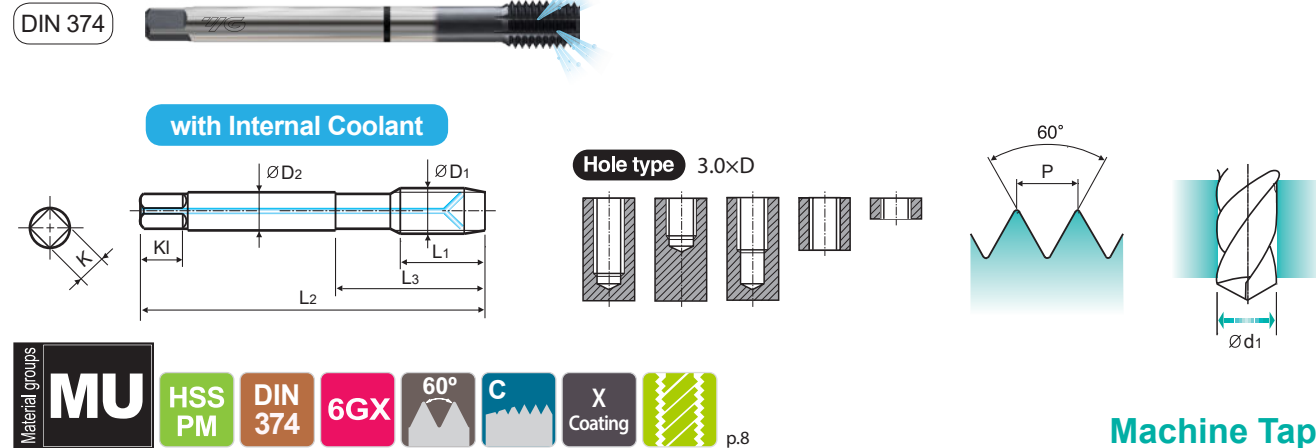

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M6	x 0.75	TRQ25326GSP	10	80	30	4.5	3.4	5.8	5	5.65
M6	x 0.5	TRQ25336GSP	10	80	30	4.5	3.4	5.8	5	5.75
M8	x 1.0	TRQ25376GSP	12	90	36	6	4.9	7.8	5	7.5
M8	x 0.75	TRQ25386GSP	12	80	30	6	4.9	7.8	5	7.65
M10	x 1.25	TRQ25436GSP	15	100	40	7	5.5	7.8	8	9.4
M10	x 1.0	TRQ25446GSP	15	90	36	7	5.5	7.8	8	9.5
M10	x 0.75	TRQ25456GSP	15	90	36	7	5.5	7.8	8	9.65
M12	x 1.5	TRQ25516GSP	17	100	40	9	7	9.8	8	11.25
M12	x 1.25	TRQ25526GSP	17	100	40	9	7	9.8	8	11.4
M12	x 1.0	TRQ25536GSP	17	100	40	9	7	9.8	8	11.5
M14	x 1.5	TRQ25556GSP	20	100	40	11	9	11.8	8	13.25
M14	x 1.25	TRQ25566GSP	20	100	40	11	9	11.8	8	13.4
M14	x 1.0	TRQ25576GSP	20	100	40	11	9	11.8	8	13.5
M16	x 1.5	TRQ25616GSP	20	100	40	12	9	11.8	8	15.25
M16	x 1.0	TRQ25626GSP	20	100	40	12	9	11.8	8	15.5

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



MF X-COATED HSS-PM FORMING TAPS for MULTI-PURPOSE ISO Metric Fine Threads DIN 13

NEW SERIES
TRQ23

- High performance on various ductile materials
- Specially designed to prevent oversized threads and reduce gauging problems

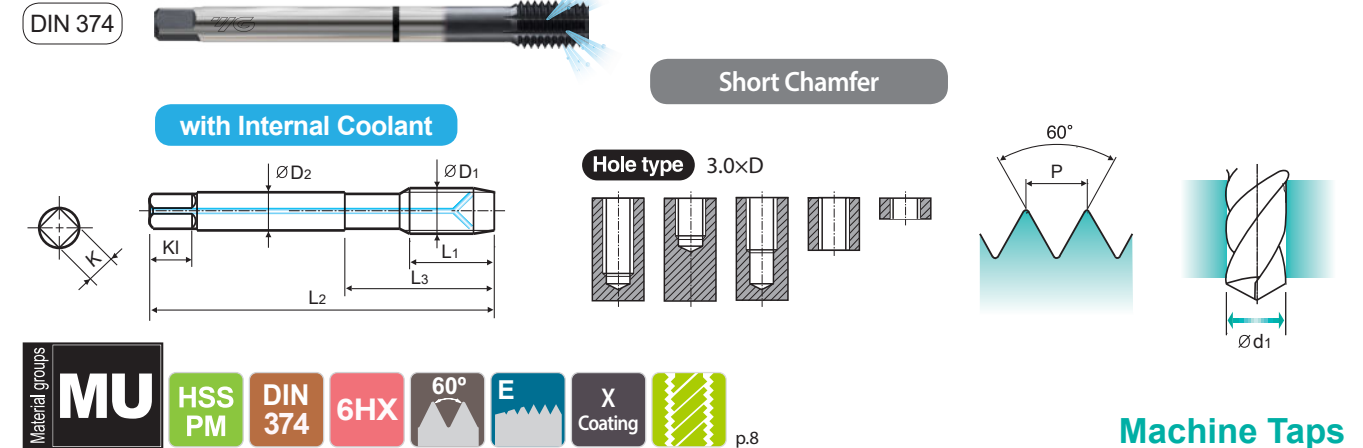


SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	Number of Lobe	Tapping Drill Diameter
ØD ₁	P	X-Coating	L ₁	L ₂	L ₃	ØD ₂	K	KI	Z	Ød ₁
M8	x 1.0	TRQ23376GSP	12	90	36	6	4.9	7.8	5	7.5
M8	x 0.75	TRQ23386GSP	12	80	30	6	4.9	7.8	5	7.65
M10	x 1.25	TRQ23436GSP	15	100	40	7	5.5	7.8	8	9.4
M10	x 1.0	TRQ23446GSP	15	90	36	7	5.5	7.8	8	9.5
M12	x 1.5	TRQ23516GSP	17	100	40	9	7	9.8	8	11.25
M12	x 1.25	TRQ23526GSP	17	100	40	9	7	9.8	8	11.4
M12	x 1.0	TRQ23536GSP	17	100	40	9	7	9.8	8	11.5
M14	x 1.5	TRQ23556GSP	20	100	40	11	9	11.8	8	13.25
M14	x 1.25	TRQ23566GSP	20	100	40	11	9	11.8	8	13.4
M14	x 1.0	TRQ23576GSP	20	100	40	11	9	11.8	8	13.5
M16	x 1.5	TRQ23616GSP	20	100	40	12	9	11.8	8	15.25
M16	x 1.0	TRQ23626GSP	20	100	40	12	9	11.8	8	15.5

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TAP TOLERANCES

► Tolerance classes of taps and tolerance positions for screw threads as per Metric ISO Standard.

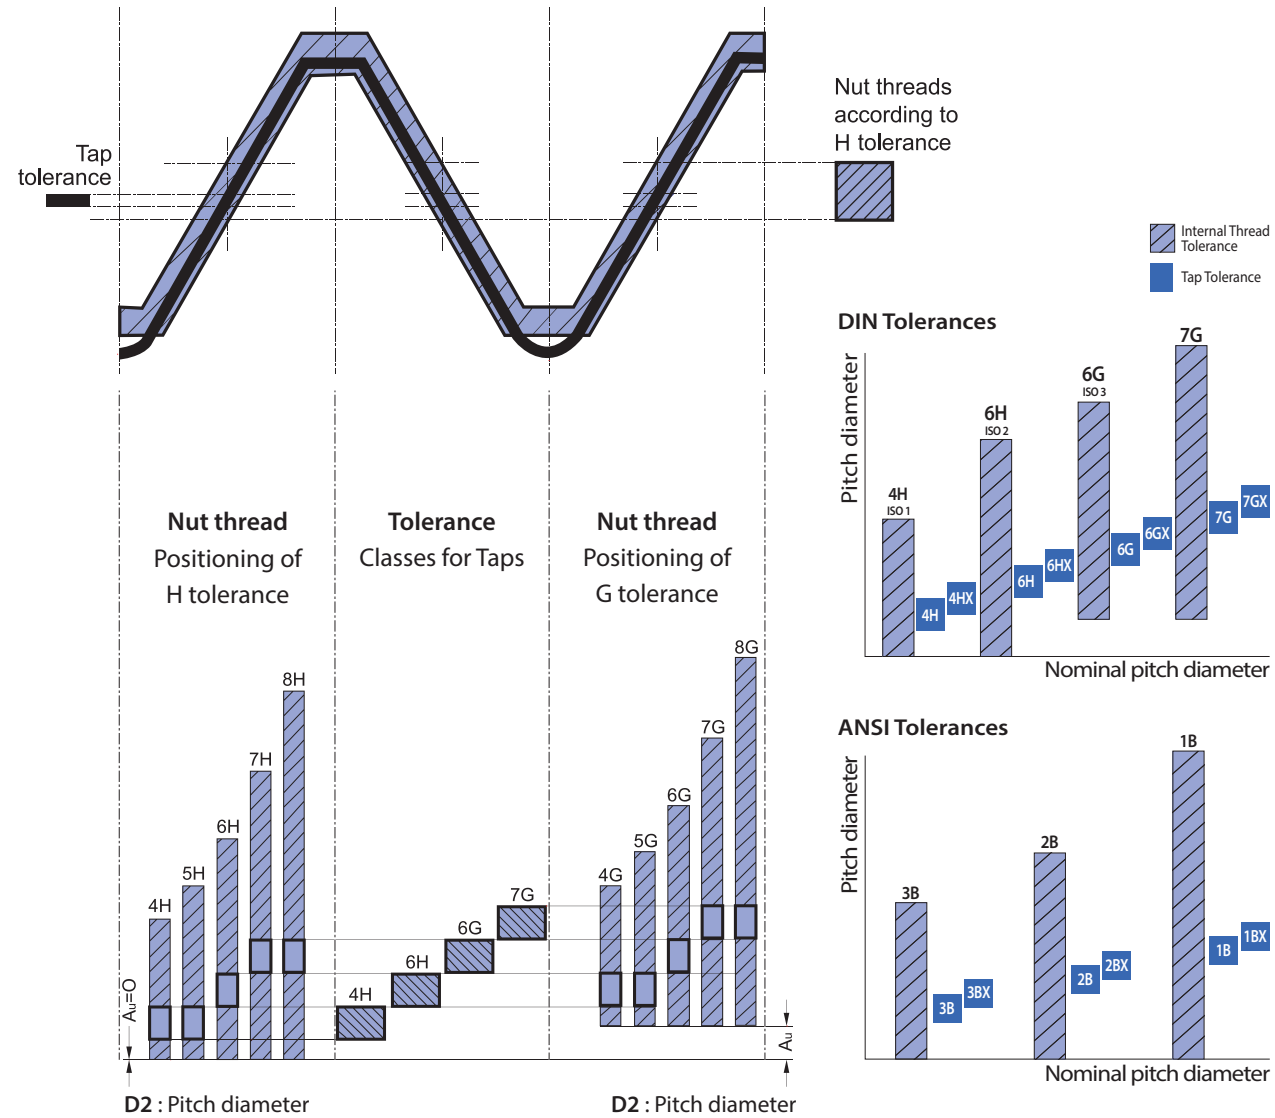

► Taps tolerances and recommended classes

Tap tolerance ISO	Tap tolerance DIN	Correct class to obtain Nut thread with tolerance				
ISO 1	4H	4H	5H	-	-	-
ISO 2	6H	4G	5G	6H	-	-
ISO 3	6G	-	-	6G	7H	8H
-	7G	-	-	-	7G	8G

TROUBLE SHOOTING GUIDE

Specific Problem	Cause	Solution
Dimensional Accuracy		
Overdose Pitch Diameter	Incorrect Tap	1. Use proper limits of taps 2. Use longer chamfered taps
	Chip Packing	1. Use spiral point or spiral fluted taps 2. Reduce number of flutes to provide extra chip room 3. Use larger hole size 4. If tapping a hole, allow deeper hole where applicable or shorten the thread length of the parts 5. Use proper lubricant
	Galling	1. Apply proper surface treatment such as Hardslick or chrome 2. Use proper cutting lubricant 3. Reduce tapping speed 4. Use proper cutting angle in accordance with material being tapped 5. Use large hole size
	Operating Conditions	1. Apply proper tapping speed 2. Correct alignment of tap and drill hole 3. Free cutting either tap or workpiece 4. Use proper tapping speed to avoid torn or rough threads 5. Use lead screw tapper 6. Use proper tapping machine with suitable power 7. Avoid misalignment of the tap and drill hole from loose spindle or worn holder
Overdose Internal Diameter	Tool Condition	1. Obtain proper indexing angle for the flutes at the cutting edge 2. Grind proper cutting angle and chamfer angle 3. Avoid too narrow a land width 4. Remove burrs from regrinding
	Hole Size	1. Use minimum hole size 2. Avoid tapered hole 3. Use proper chamfered taps
Undersize Pitch Diameter	Galling	1. Galling solutions 1 through 4 above can be applied to this specific problem
	Incorrect Tap	1. Use oversize taps 2. Apply proper chamfer angle 3. Increase cutting angle
	Damaged Thread	1. Use proper reversing speed to avoid damaging tapped thread on the way out of the hole
Undersize Internal Diameter	Left-over Chips	1. Increase cutting performance to avoid any left over chips in the hole 2. Remove left over chips from the hole for gage checking
	Hole Size	1. Use maximum drill size
Breakage	Incorrect Tap Selection	1. Avoid chip packing in the flutes or on the bottom of the hole Use spiral pointed or spiral fluted taps or fluteless taps 2. Apply correct surface treatment such as Hardslick or bright
	Excessive Tapping Torque	1. Use larger drill size 2. Try to shorten thread length 3. Increase cutting angle 4. Apply a tap with more thread relief and reduced land width 5. Apply correct surface treatment such as Hardslick

TROUBLE SHOOTING GUIDE

Specific Problem	Cause	Solution
Dimensional Accuracy		
Breakage	Operating Conditions	1. Reduce tapping speed 2. Avoid misalignment between tap and the hole and tapered hole 3. Use floating type of tapping holder 4. Use tapping holder with torque adjustment 5. Avoid hitting bottom of the hole with tap
	Tool Condition	1. Do not grind the bottom of the flute 2. Avoid too narrow a land width 3. Remove all worn sections when regrinding the flutes 4. Regrind tool more frequently
Chipping	Incorrect Tap Selection	1. Reduce cutting angle 2. Use a different kind of high-speed steel tap 3. Reduce hardness of the tap 4. Increase chamfer length 5. Avoid chip packing in the flutes or in the bottom of the hole by using spiral fluted or spiral pointed taps
	Wear	1. Reduce tapping speed 2. Avoid misalignment between tap and hole 3. Avoid sudden return of reverse in blind hole tapping 4. Avoid galling 5. Use larger hole size
Wearx	Incorrect Tap Selection	1. Apply specially designed tap for tapping heat treated material 2. Change to a type of high-speed steel tap that contains vanadium 3. Apply special surface treatment such as TiCN, TiAlN or Hardslick 4. Increase chamfer length
	Operating Conditions	1. Reduce tapping speed 2. Apply proper cutting lubricants 3. Avoid work hardened hole 4. Use larger hole size
	Tool Condition	1. Grind proper cutting angle 2. Avoid hardness reduction from grinding process
Torn or Rough Thread	Chamfer Too Short	1. Increase chamfer length
	Wrong Cutting Angle	1. Apply proper cutting angle
	Galling	1. Use thread relieved taps 2. Reduce land width 3. Apply surface treatment such as Hardslick or chrome 4. Use proper cutting lubricant 5. Reduce tapping speed 6. Use larger hole size 7. Obtain proper alignment between tap and work
	Chip Packing	1. Use spiral pointed or spiral fluted taps 2. Use larger drill size
Chattering on Tapped Thread	Tool Free Cutting	1. Reduce cutting angle 2. Reduce amount of thread relief
	Tool Condition	1. Avoid too narrow land width 2. Do not grind the bottom of the flute

HIGH QUALITY PRODUCTS and ON TIME DELIVERY
for WORLD-WIDE CUSTOMERS

Since 1981, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

 BELGIUM	 FINLAND	 ITALY	 PORTUGAL	 SLOVENIA	 THE NETHERLANDS
 CROATIA	 FRANCE	 LITHUANIA	 ROMANIA	 SPAIN	 TÜRKIYE
 CZECH REPUBLIC	 GERMANY	 NORWAY	 SWEDEN	 UNITED KINGDOM	 DENMARK
 HUNGARY	 POLAND	 SERBIA	 SWITZERLAND	 AUSTRIA	 GREECE
 ALBANIA	 BOSNIA AND HERZEGOVINA	 UKRAINE	 UZBEKISTAN	 BULGARIA	
 ESTONIA					

ASIA PACIFIC

 AUSTRALIA	 INDONESIA	 MALAYSIA	 SOUTH KOREA	 VIETNAM
 CHINA	 ISRAEL	 PAKISTAN	 TAIWAN	
 HONG KONG	 JAPAN	 PHILIPPINES	 THAILAND	
 INDIA	 SAUDI ARABIA	 SINGAPORE	 UNITED ARAB EMIRATES	

AMERICAS

 BRAZIL	 CANADA	 COLOMBIA	 MEXICO	 UNITED STATES
--	--	--	--	---

AFRICA

 EGYPT	 SOUTH AFRICA
---	--

 YG-1 CO., LTD.

* For the more information on sales network, please contact the head office as below;

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

E-mail: yg1@yg1.solutions

www.yg1.solutions



HSS-PM(Powder Metallurgy) Premium Taps



Scan this QR code
to see our **Prime Tap** at work.

YG-1 CO., LTD.

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

www.yg1.solutions

E-mail: yg1@yg1.solutions

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets



YG1YEPT2507003